

# Provisional Findings for the OMPS Nadir Profiler Ozone Profile (IMOPO)

Compiled by L. Flynn  
from work by the JPSS and S-NPP OMPS Teams  
Last Updated January 16, 2012



# Outline

- Provisional Definitions
- OMPS Background
- SOMPS Performance
- IMOPO Performance
  - Internal Evaluation
    - Flags SAA, tozcod, procod,
    - Initial and Final Residuals
    - Reflectivity (also to INCTO)
    - Total Column Ozone (also to INCTO)
    - Ozone Profiles (Layer Amounts and Mixing Ratios)
  - External Evaluation
    - Comparisons to OMPS V8PRO (Mixing ratios, TOZ, Ref)
    - Comparisons to SBUV/2 V8PRO, V6PRO
    - Comparisons to MLS forward model results
  - Known Deficiencies
- Summary of Findings and Recommendations
  - Monitoring plots  
[http://www.star.nesdis.noaa.gov/icvs/PROD/proOMPSbeta.TOZ\\_INCTO.php](http://www.star.nesdis.noaa.gov/icvs/PROD/proOMPSbeta.TOZ_INCTO.php)
  - Promotion to Provisional
  - Upgrade to V8PRO

Provisional Definition	Artifacts (Deliverables)
Product quality may not be optimal	Product accuracy is determined for a broader (but still limited) set of conditions. No requirement to demonstrate compliance with specifications.
Incremental product improvements are still occurring	Narrative, listing and discussing known errors. All DRs are identified and prioritized (1-5). Provisional readiness will address priorities 1-2. Pathway towards algorithm improvements to meet specifications is demonstrated.
Version control is in affect	Description of the development environment, algorithm version (IDPS build number), and LUTs/PCTs versions used to generate the product validation materials. ATBDs are accurate, up-to-date and consistent with the product running.
General research community is encouraged to participate in the QA and validation of the product, but need to be aware that product validation and QA are ongoing	ADP STAR will request feedback from appropriate users for the product. The notification letter will include a Provisional Maturity disclaimer. DPA will send request to Project Science to post Provisional Maturity disclaimer on CLASS. DPA will submit readme document to CLASS.
Users are urged to consult the EDR product status document prior to use of the data in publications	Warning of potential non-reproducibility of results due to continuing calibration and code changes. Identify known deficiencies regarding product quality.
May be replaced in the archive when the validated product becomes available	Technical evaluation of limited data reprocessing is presented.
Ready for operational evaluation	Key NOAA and non-NOAA end users are identified and feedback requested.

**Table 4.2.4 - Ozone Nadir Profile (OMPS-NP)**

Attribute	Threshold	Objective
<b>Ozone NP Applicable Conditions:</b> 1. Clear, daytime only (3)		
a. Horizontal Cell Size	250 X 250 km (1)	50 x 50 km <sup>2</sup>
b. Vertical Cell Size	5 km reporting	
1. Below 30 hPa (~ < 25 km)	10 -20 km	3 km (0 -Th)
2. 30 -1 hPa (~ 25 -50 km)	7 -10 km	1 km (TH -25 km)
3. Above 1 hPa (~ > 50 km)	10 -20 km	3 km (25 -60 km)
c. Mapping Uncertainty, 1 Sigma	< 25 km	5 km
d. Measurement Range		
Nadir Profile, 0 - 60 km	0.1-15 ppmv	0.01 -3 ppmv (0-TH) 0.1-15 ppmv (TH-60 km)
e. Measurement Precision (2)		
1. Below 30 hPa (~ < 25 km)	Greater of 20 % or 0.1 ppmv	10% (0 -TH)
2. At 30 hPa (~ 25 km)	Greater of 10 % or 0.1 ppmv	3%
3. 30 -1 hPa (~ 25 -50 km)	5% -10%	1%
4. Above 1 hPa (~ > 50 km)	Greater of 10% or 0.1 ppmv	3%
f. Measurement Accuracy (2)		
1. Below 30 hPa (~ < 25 km)	Greater of 10 % or 0.1 ppmv	10% (0 -15 km)
2. 30 -1 hPa (~ 25 -50 km)	5% -10%	5% (15 -60 km)
3. At 1 hPa (~ 50 km)	Greater of 10 % or 0.1 ppmv	5% (15 -60 km)
4. Above 1 hPa (~ > 50 km)	Greater of 10 % or 0.1 ppmv	5% (15 -60 km)
g. Refresh	At least 60% coverage of the globe every 7 days (monthly average) (2,3)	24 hrs. (2,3)
	(16.7° FOV)	v2,0, 9/22/12

**Notes:** 1. The SBUV/2 has a 180 km X 180 km cross-track by along -track FOV. It makes its 12 measurements over 24 Samples (160 km of along-track motion). The OMPS Nadir Profiler is designed to be operated in a mode that is able to subsample the required HCS. 2. The OMPS Nadir Profiler performance is expected to degrade in the area of the South Atlantic Anomaly (SAA) due to the impact of periodic charged particle effects in this region. 3. All OMPS measurements require sunlight, so there is no coverage in polar night areas.

# IMOPO Summary of Findings & Recommendations

- Promotion to Provisional
  - The IMOPO algorithm is functioning correctly. The product precision and accuracy are affected by the current state of the calibration, stray light correction, and wavelength scale. These will continue to change as improved characterizations are brought into the system.
  - The OMPS Team recommends that the IMOPO Product be promoted to Provisional Maturity.
- Monitoring Figures are available at [http://www.star.nesdis.noaa.gov/icvs/PROD/proOMPSbeta.O3PRO\\_IMOPO.php](http://www.star.nesdis.noaa.gov/icvs/PROD/proOMPSbeta.O3PRO_IMOPO.php)
- Upgrade to V8TOZ
  - The team recommends an upgrade of the current Version 6 ozone profile retrieval algorithm to the V8Pro algorithm in use with the SBUV/2 measurements for both climate data records and operational products. (This is captured in the JPSS system under DR #4256.)


# OMPS Fundamentals

**NOAA, through the Joint Polar Satellite System (JPSS) program, in partnership with National Aeronautical Space Administration (NASA), launched the Suomi National Polar-orbiting Partnership (S-NPP) satellite on October 28, 2011. The Ozone Mapping and Profiler Suite (OMPS) consists of two telescopes feeding three detectors measuring solar radiance scattered by the Earth's atmosphere and solar irradiance by using diffusers. The measurements are used to generate estimates of total column ozone and vertical ozone profiles.**

**The nadir mapper (total column) sensor uses a single grating monochromator and a CCD array detector to make measurements every 0.42 nm from 300 nm to 380 nm with 1.0-nm resolution. It has a 110° cross-track FOV and 0.27° along-track slit width FOV. The measurements are currently combined into 35 cross-track bins: 3.35° (50 km) at nadir, and 2.84° at ±55°. The resolution is 50 km along-track at nadir, with a 7.6-second reporting period. The instrument is capable of making measurements with much better horizontal resolution.**

**The nadir profiler sensor uses a double monochromator and a CCD array detector to make measurements every 0.42 nm from 250 nm to 310 nm with 1.0-nm resolution. It has a 16.6° cross-track FOV, 0.26° along-track slit width. The current reporting period is 38 seconds giving it a 250 km x 250 km cell size collocated with the five central total column cells.**

**The limb profiler sensor is a prism spectrometer with spectral coverage from 290 nm to 1000 nm. It has three slits separated by 4.25° with a 19-second reporting period that equates to 125 km along-track motion. The slits have 112 km (1.95°) vertical FOVs equating to 0 to 60 km coverage at the limb, plus offsets for pointing uncertainty, orbital variation, and Earth oblateness. The CCD array detector provides measurements every 1.1 km with 2.1-km vertical resolution. The products for the Limb Profiler are not discussed here.**

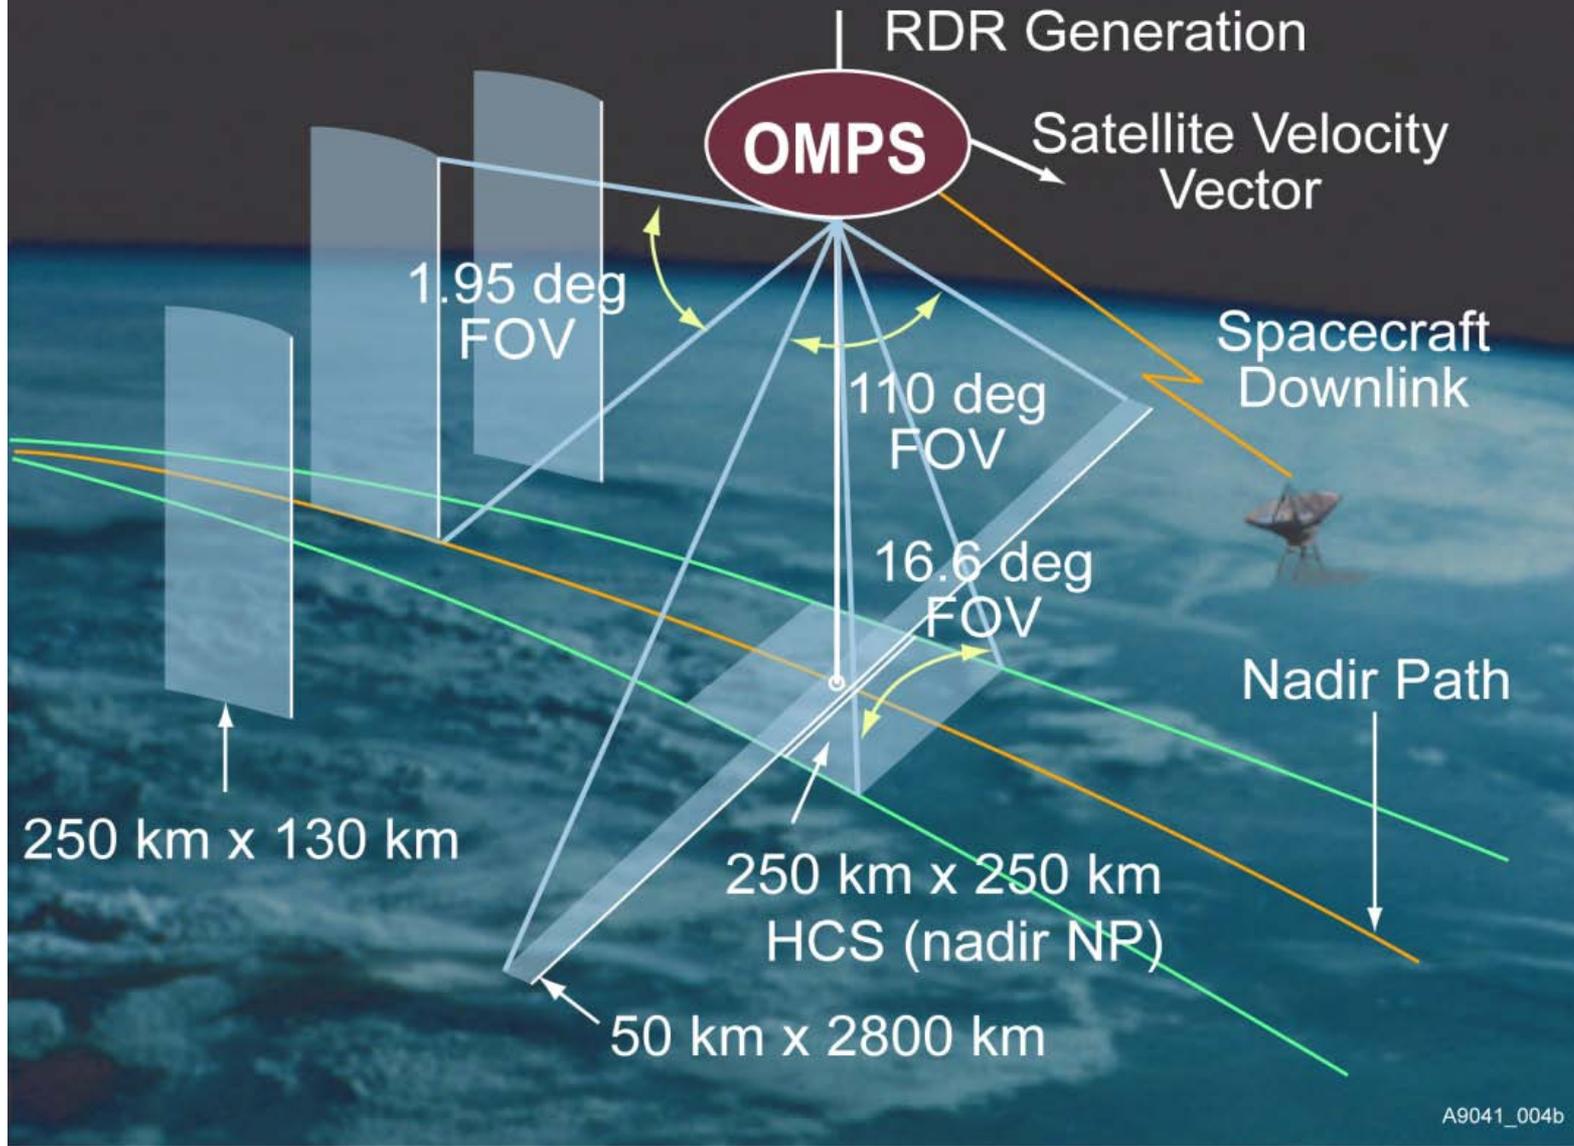

Instrument Fields of View. Schematic from Ball Aerospace and Technology Corporation.

# Nadir Mapper & Profiler




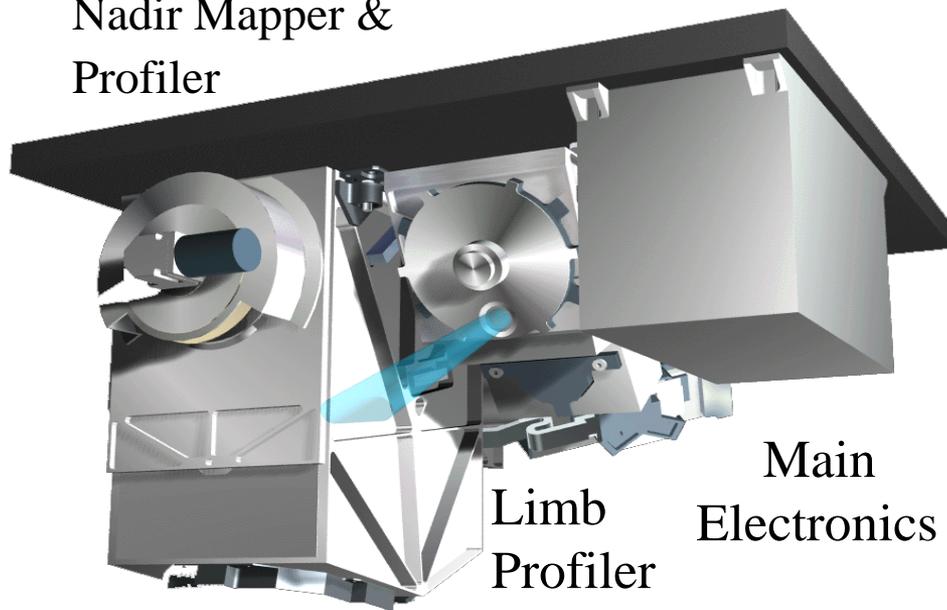


Diagram from Ball Aerospace and Technology Corporation

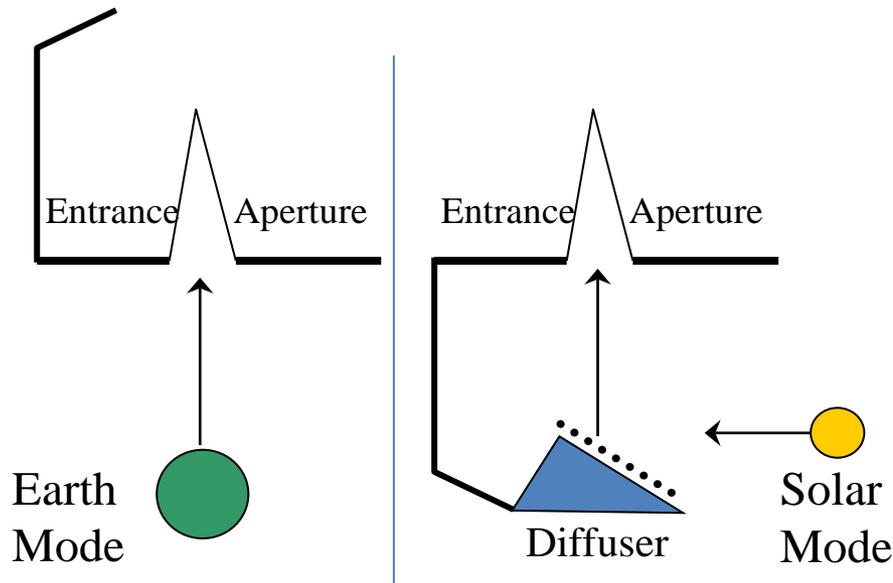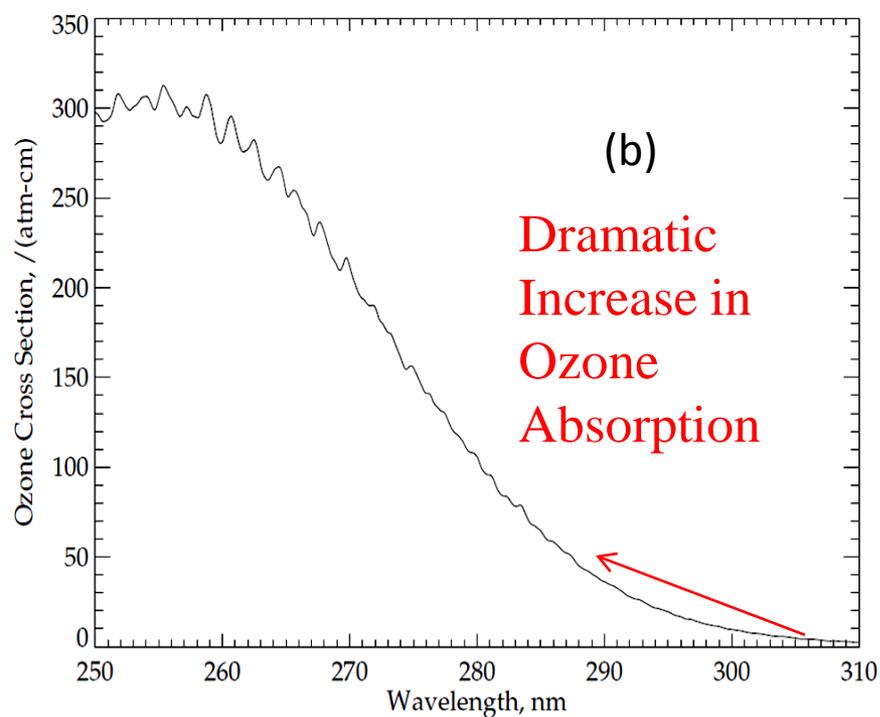

Each instrument can view the Earth or either of two solar diffusers; a working and a reference.

The instruments measure radiance scattered from the Earth's atmosphere and surface. They also make solar measurements using pairs of diffusers. Judicious operation of working and reference diffusers allows analysts to track the diffuser degradation. The solar measurements also provide checks on the wavelength scale and bandpass. The instruments have completed multiple passes through their internal dark and nonlinearity calibration sequences and are beginning to make regular solar measurements. (See information on the OMPS SDRs.)

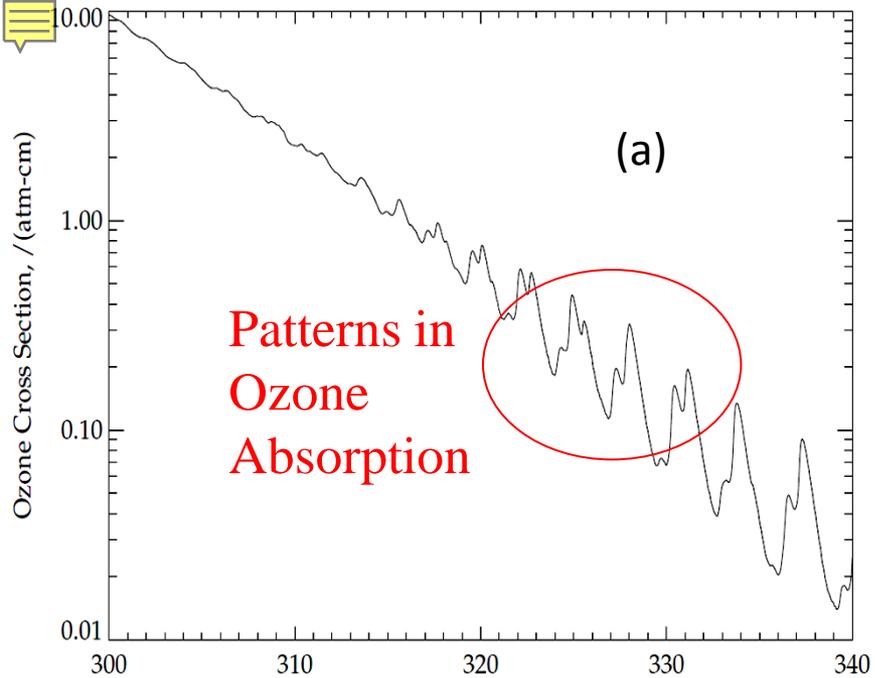




## Ozone Absorption Cross Sections:

Ozone has four main absorption bands in the ultraviolet, visible and near-infrared as follows: the Hartley bands from 200 nm to 310 nm, the Huggins bands from 310 nm to 380 nm, the Chappuis bands from 400 nm to 650 nm, and the Wulf bands from 600 nm to 1100 nm. The OMPS nadir telescope directs photons to two spectrometers, one with a wide, cross-track field-of-view (FOV) and spectral coverage in the Huggins ozone absorption bands, and the other with a smaller, nadir FOV and spectral coverage in the Hartley ozone absorption bands. Figures (a) and (b) show the ozone absorption cross-sections at a nominal atmospheric temperature for parts of these bands. These cross-sections are for  $-50^{\circ}\text{C}$  as estimated from a quadratic fit in temperature of the Brion-Daumont-Malicet data set.

# OMPS Nadir Mapper Spectra

- The plot at the top of the following slide shows a sample OMPS Nadir Mapper solar spectrum measured in January. The initial calibration, goniometry and wavelengths scales have been applied. Notice the Fraunhofer lines, e.g., a deep one near 360 nm.
- The plot in the middle shows a sample spectrum for the Earth View data for the nadir field-of view.
- The plot on the bottom shows the ratio of the first two spectra. Notice that much of the structure in the solar spectrum cancels out in the ratio. Also notice the variations between 320 nm and 330 nm produced by differential ozone absorption with wavelength as illustrated in the Figure (a) from two slides earlier.




# Typical spectra from 310 to 380 nm for OMPS Nadir Mapper

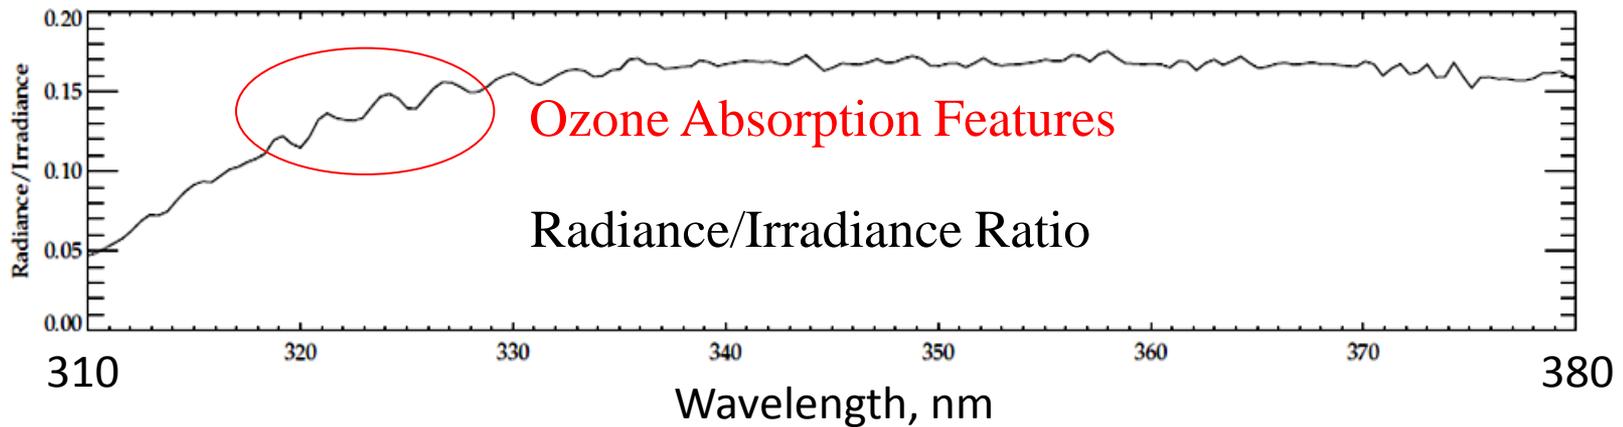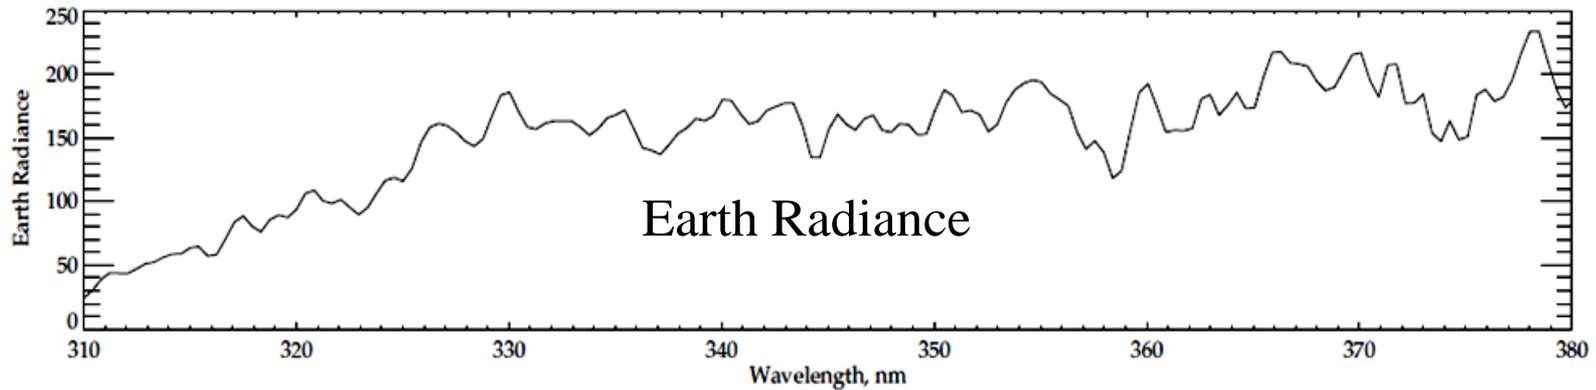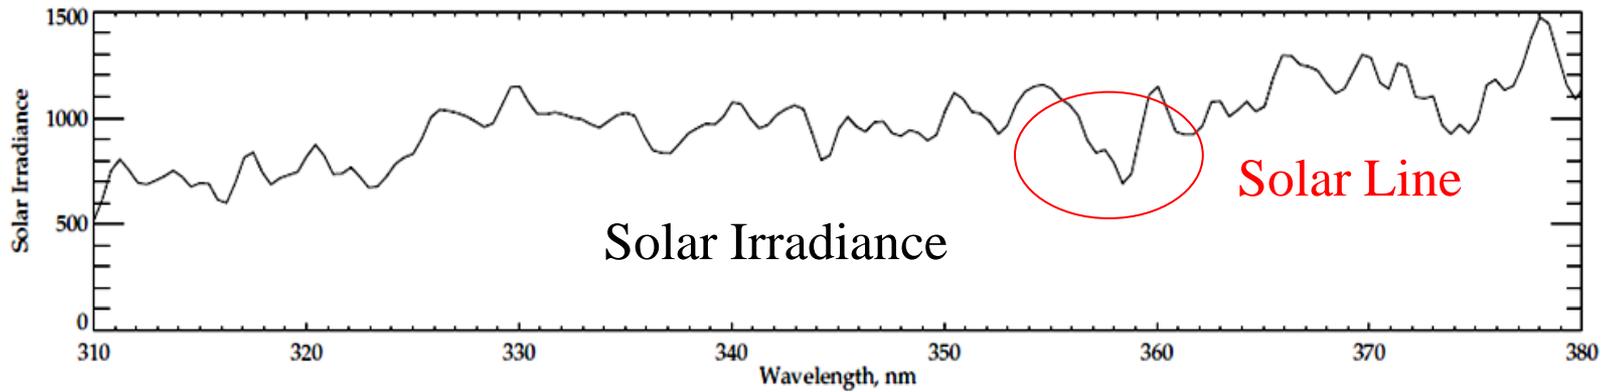

# OMPS Nadir Profiler Spectra

- The plot at the top of the following slide shows a synthetic OMPS Nadir Profiler solar spectrum measured currently in use. The spectrum was created by combining the laboratory bandpass characterization with a high spectral resolution reference solar spectrum. Notice the Fraunhofer lines, e.g., a deep Mg one near 280 nm.
- The plot in the middle shows a sample spectrum for the Earth View data. The initial calibration, goniometry and wavelengths scales have been applied.
- The plot on the bottom shows the ratio of the first two spectra. Notice that much of the structure in the solar spectrum cancels out in the ratio. Also notice the rapid drop in albedo from 310 nm to 290 nm produced by differential ozone absorption with wavelength as illustrated in the Figure (b) from four slides earlier.



# Typical spectra from 250 to 310 nm for OMPS Nadir Profiler

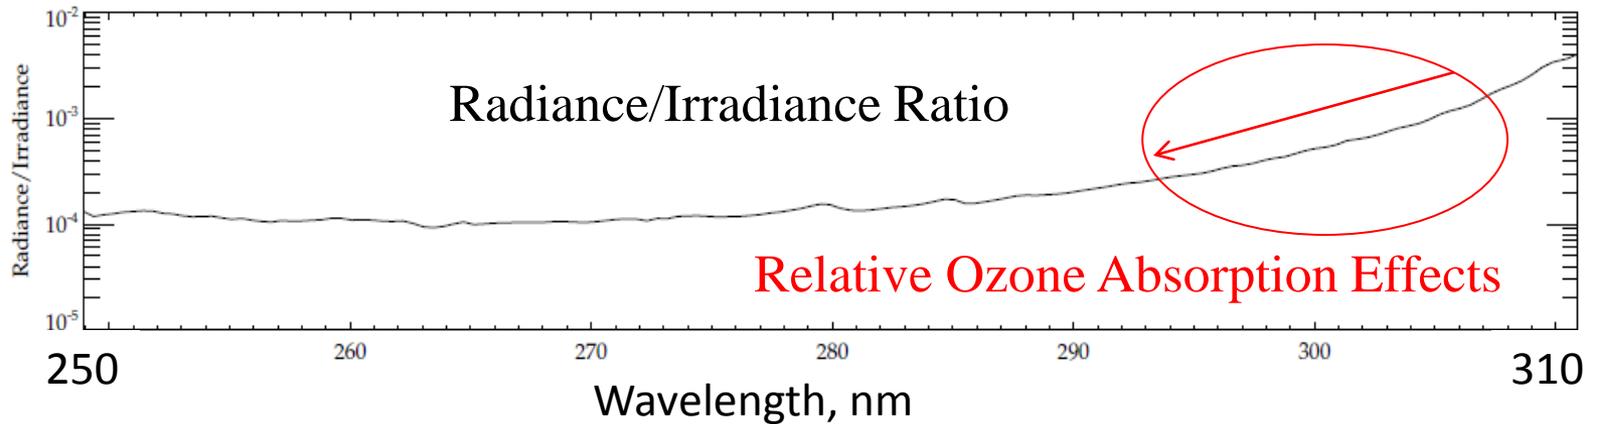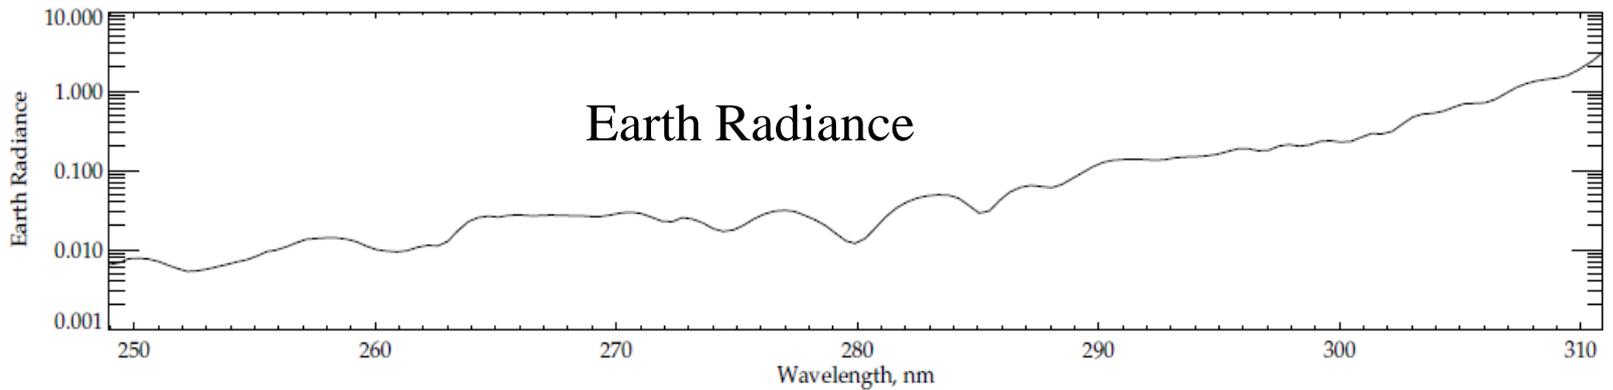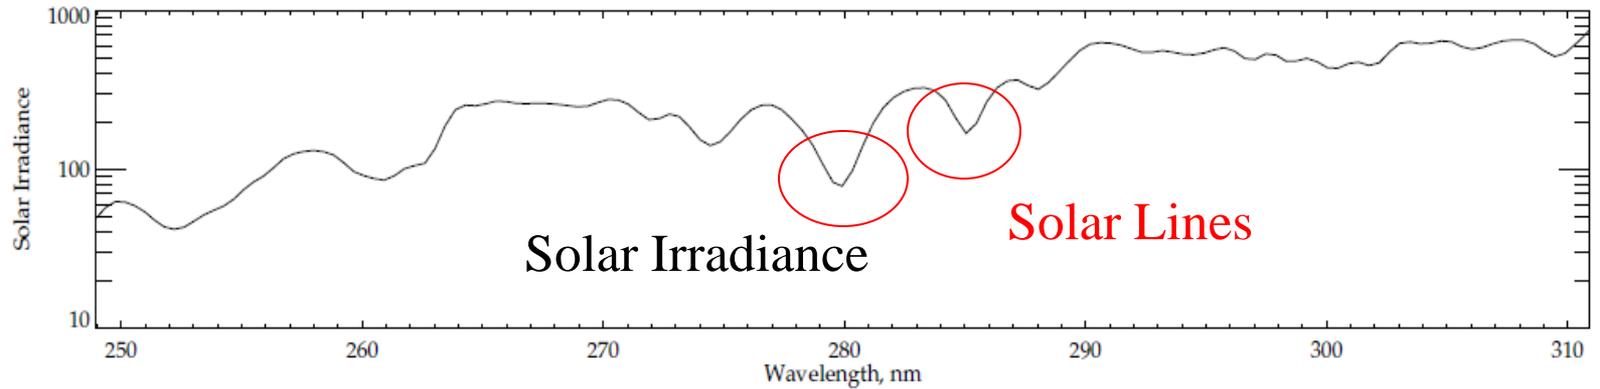

# Caveats for OMPS NP Earth-View SDR

- Dark current for OMPS NP has not been updated since February 29, 2012. This can result in positive SDR bias (higher than truth) that generally increases with time and decreases with wavelength. As of the end of 2012, the bias can be up to 1% for wavelength shorter than 255 nm but about 0.1% for wavelength longer than 285 nm. We expect to update the NP dark by the end of March 2013 (DR 5032).
- The OMPS NM and NP dark will be updated weekly for most part of the Provisional products, which is less frequent than originally designed. This can result in small but systematic positive bias (higher than truth) in SDR. For NM, the bias is negligible for most wavelength. In rare cases where signals are extreme weak, such as near the terminator and for wavelength shorter than 305 nm, the bias can reach 0.2%. For NP, the bias generally decreases with wavelength, up to 0.02% for wavelength shorter than 255 nm and down to 0.002% for wavelength longer than 285 nm.
- The spectral solar irradiances have been updated with on-orbit measurements for both NM and NP. Further analysis and update of Day One solar irradiance may be provided in future. These preliminary and additional updates of Day One solar have been planned before launch as part of normal calibration update.
- The wavelength scales for the OMPS NM and NP for both Earth and solar spectra have been updated with on-orbit measurements. The adjustments were somehow larger than expected from pre-launch thermal analysis. We will monitor and re-evaluate periodically.
- While the OMPS NP South Atlantic Anomaly (SAA) flag is working well in identifying regions with higher frequency of charged particles, we plan to improve the OMPS SDR performance over SAA as more results become available and are analyzed.
- The OMPS NP measurements are affected by out-of-band stray light. We are comparing the size and source of these contributions in-orbit to the ground-based measurements and developing a correction.

# Effect of 40 weeks of no dark updates on ozone profile retrievals

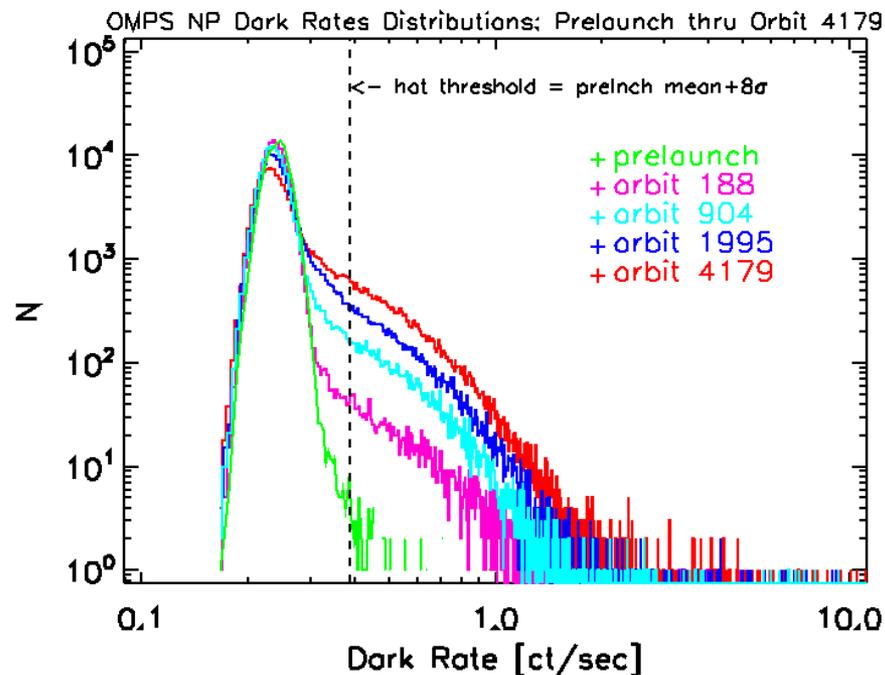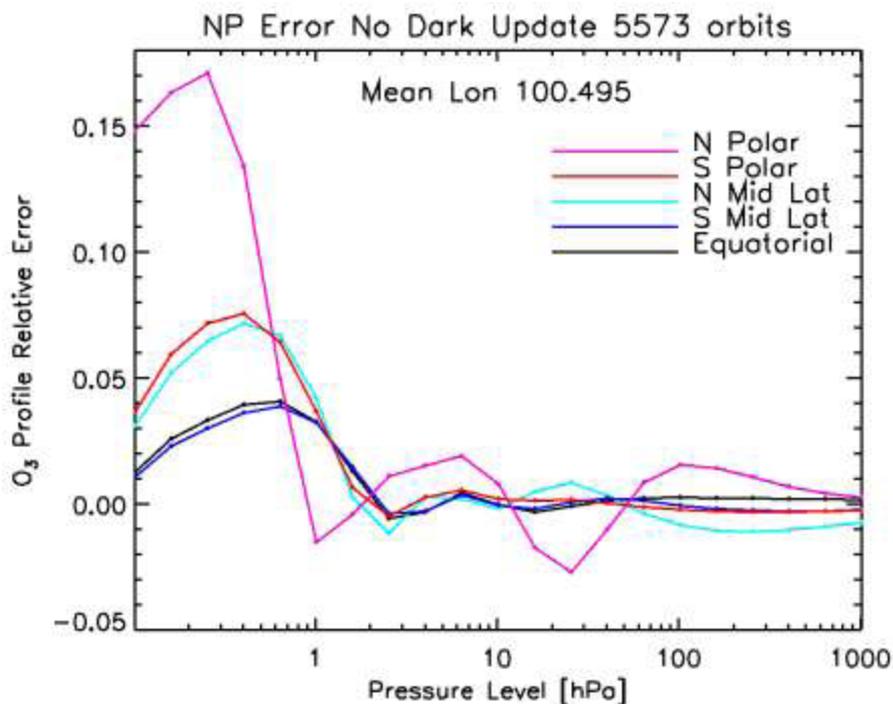

- Cuts from surface plot NP orbit 5573 fractional error in as a function of altitude in 5 latitude bins: Polar: >60 deg, Equatorial: < 12.5 deg, Mid: > 35 < 45 deg.



# IMOPPO Known Product Deficiencies

- Profile and total ozone error flags are switched in the output. (Parent PCR 27740 – Expected correction early 2013)
- Snow/Ice data is all zeroes (DR #4802)
- The input-out-of-bound flag (Error Code 20) is set with an incorrect check on surface pressure (DR #4860, CCR 595 expected Mx6.6 2/2013)
- Stray Light<sup>^</sup>
  - Correction subroutine and definitive estimates of coefficients are under development (DR #4823).
- Radiance Coefficients<sup>^</sup>
  - Adjustments could be entered through CF Earth (DR #5047).
- Dark Tables weekly updates will begin 2/2013 (DRs #4749, #4818)
- Wavelength Scale and Solar<sup>^</sup>
  - Working on definitive Day 1 and time dependence
  - Working on adjustments for intra-orbit scale drift

<sup>^</sup> These may create large discontinuities in the product performance as they and similar changes enter the system.

# Timeline of major changes in OMPS Nadir Products


- Problem with wavelength scale in NM February
  - Problem with wavelength scale in NP February (DOY error) Final data at CLASS – No.
  - May 7, 2012 – New OMPS NM and OMPS NP Wavelength Scales CCR #389
  - June 11, 2012 – New OMPS NM Day 1 Solar Irradiance CCR #411
  - July 17, 2012 – OMPS NP Day 1 Solar Irradiance CCR #458
  - August 10, 2012 – New NM RT LUT CCR #343 (Mx6.1)
  - August 10, 2012 – CTP to UV for INCTO CCR #385 (Mx6.2)
  - August 10, 2012 – Four corner GEO fix for GONPO
  - October 15, 2012 – OMPS NM E/S distance CCR #481 (Mx6.3)
  - October 15, 2012 – Partial cloud and VIIRS CF CCR #419 (Mx6.3)
  - TLE in use for Ephemeris Mx6.3 – Mx6.4
  - Updates to VIIRS Snow/Ice Monthly Tiles
- Future
- February 2013 – IMOPO Surface Pressure limit too restrictive CCR #595 (Mx6.6)
  - April 2013 – CTP for OOTCO CCR #736 (Mx7.0)
  - April 2013 – Profile and TOZ flags switched in IMOPO PCR (Mx7.0)

# OMPS NP Solar Flux Measurements

Comparison of the first six solar measurements from the working diffuser.

The lines give the ratios of the five other measurements to the March 7<sup>th</sup> one. The instrument / diffuser throughput shows little change over the four months, especially as there should be some differences due to real solar spectrum changes. Possible additional sources (e.g., goniometric characterization, minor wavelength scale drift, and dark current evolution) are under investigation.

A future reference solar diffuser measurement will add more information.

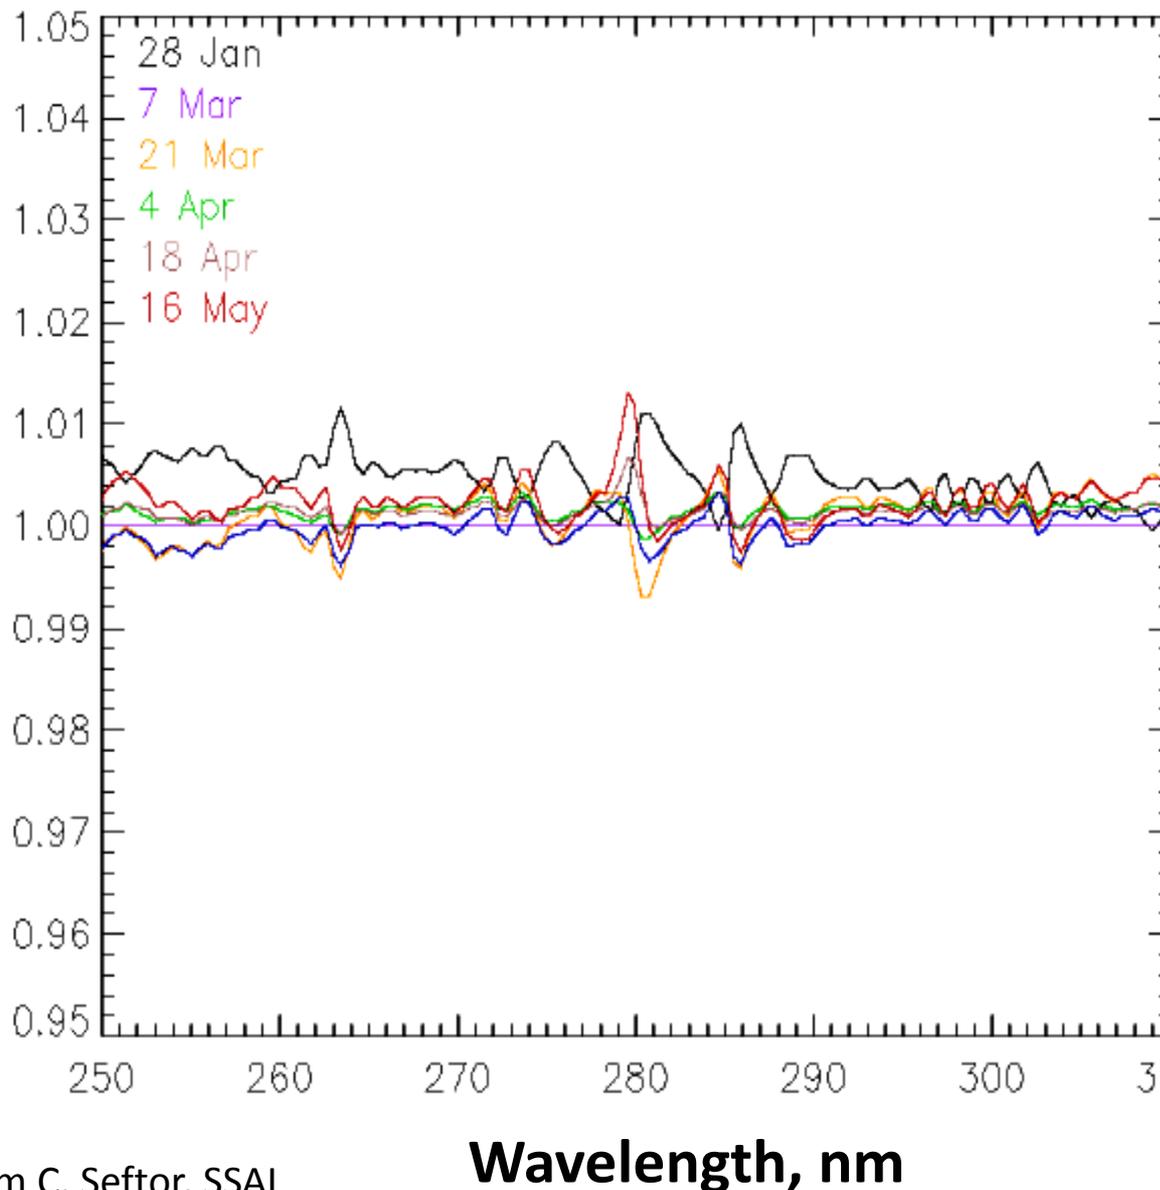

# Ozone Profile Product, **IMOPO**

The spectral measurements from the OMPS Nadir Profiler and Nadir Mapper of the radiances scattered by the Earth's atmosphere are used to generate estimates of the ozone vertical profile along the orbital track (**IMOPO**). The algorithm uses ratios of Earth radiance to Solar irradiance at a set of 12 wavelengths (at approximately 253, 273, 283, 288, 292, 298, 302, 306, 313, 318, 331 and 340 nm) with eight from the Nadir Profiler and four from the Nadir Mapper to obtain estimates of the total column ozone, effective reflectivity, and the ozone vertical profile in 12 Umkehr Layers. The radiances for the four longer wavelength are obtained from the 25 Nadir Mapper FOVs co-located with a single Nadir Profiler FOV. The longer channel radiance/irradiance ratios are used to generate estimates of the total column ozone and scene effective reflectivity. The total column ozone is used to generate a first guess ozone profile that becomes the A Priori for a maximum likelihood ozone profile retrieval using the ratios for the seven shortest wavelengths (omitting the 253 nm channel and including 313 nm at high SZA). Additional information is in the OMPS Nadir Profile Algorithm Theoretical Basis and Operational Algorithm Description Documents, and a volume of the Common Data Format Control Book at:

<http://npp.gsfc.nasa.gov/documents.html>

OMPS NP ATBD [474-00026 Rev-Baseline.pdf](#)

OMPS NP OAD [474-00067 OAD-OMPS-NP-IP-SW RevA 201](#)

Intermediate Product CDFCB

[474-00001-04-01 CDFCB-Vol4-Part1 Rev- Block-1-1 31Mar2011.pdf20127.pdf](#)

# Matching the FOVs for the Nadir Mapper and Nadir Profiler


The Nadir Mapper and Nadir Profiler each produce data in 37.5 S(econd) granules. The Nadir Profiler IFOV is designed to coincide with the five central IFOVs of the Nadir Mapper, and a single measurement of the Nadir Profiler aggregated over 37.5 S matches up with five Nadir Mapper rows each aggregated for 7.5 S. The two instruments may begin their granules at different times relative to the southern terminator crossing offset by multiples of 7.5 S.

The Figures on the next slide show the results of an investigation into the alignment of Nadir Mapper and Nadir Profiler granules in their respective geolocation products, GOTCO and GONPO. The first three plots (top left, bottom left, and top right) each display the FOV center locations of three consecutive granules for both the Nadir Mapper and the Nadir Profiler. Each set of 25 small symbols show the location for the five nadir cross track FOVs (nadir and two nearest on both sides) for the five rows of measurements in a granule. The large symbols are the FOV center locations for the Nadir Profiler. Notice that the Nadir Profiler may match up with a Nadir Profiler granule or it may be offset by one or two rows.


The figure on the bottom right shows an unusual case where there is a Nadir Mapper granule that only contains four rows – 30 S of measurements instead of 37.5 S. This can lead to changes in the offset between the granules for the Nadir Mapper and Nadir Profiler within an orbit. The IMOPO products follow the Nadir Profiler granularity.

## Longitude &amp; Latitude Locations for GOTCO and GONPO Granule Matching Cases


2012/03/05 case00

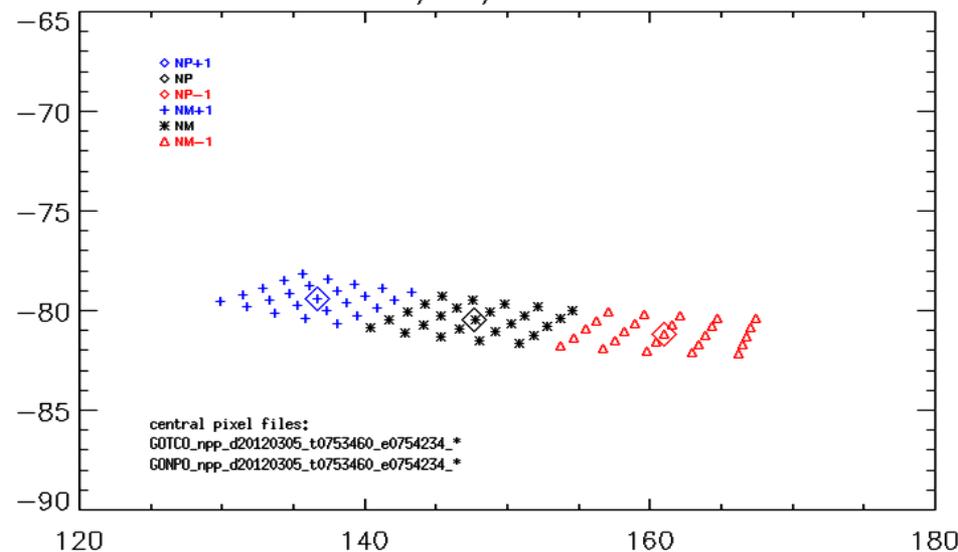


2012/03/05 case02

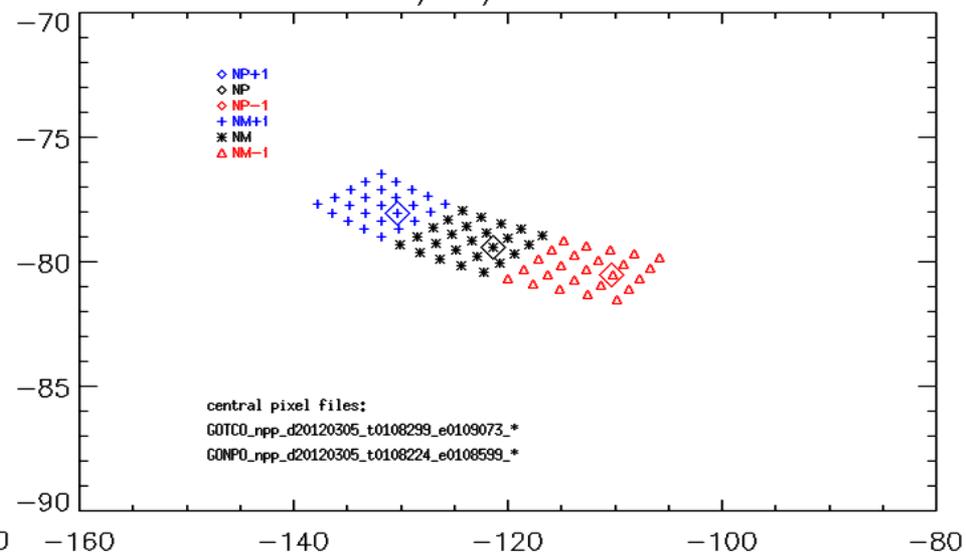

2012/03/05 case01

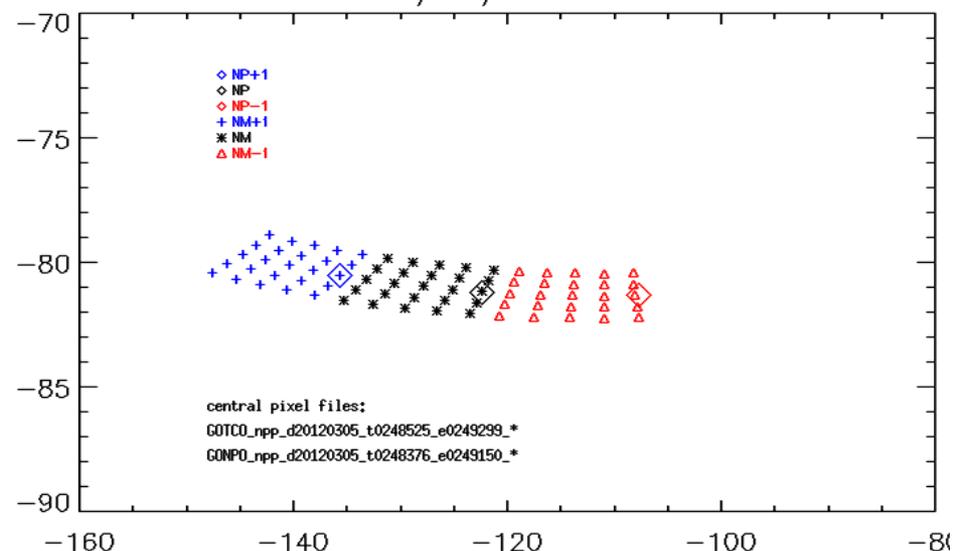

2012/03/05 NM fake-4-crosstrack granule

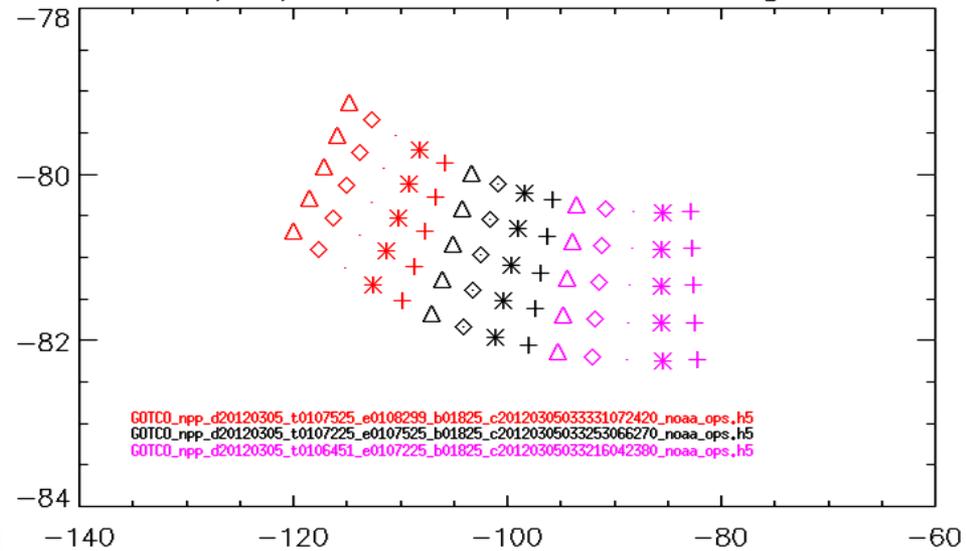



# IMOPO Error Flags

- Individual Flags
  - Sun Glint, SAA, and Eclipse are all set correctly
  - SO<sub>2</sub> Index is running too negative; it and the Volcano Contamination Index (VMI) are affected by initial calibration uncertainties.
  - Snow/Ice is **always zero – DR #4802**
- Profile Error Codes\*
  - Code 1 is set correctly (Lower three layers)
  - Code 2 is set correctly (BestTOZ vs ProTOZ)
  - Code 3 is set correctly (large final residuals – often for data in SAA)
  - Code 5 is set correctly (C outside of range – often for data in SAA)
  - Codes 4, 6, 7 & 8 conditions are not met in samples
  - Code 9 (Bad counts/missing measurements)
  - Code 20 Invalid or out-of-range inputs – **Flagging all terrain pressure > 1.001 atm.**
  - Descending Flag (+10) **set incorrectly – A simple check of latitude changes will work.**
- Total Ozone Error Codes\*
  - Codes 1 & 2 are set correctly by comparing S x Omega to 1.5 and 3.5 atm-cm, respectively
  - Code 4 is set correctly (Pair differences)
  - TOZ Error Code 5 matches PRO Code 2
  - Code 7 not seen; Photometer Reflectivity difference is not in the output.
  - Codes 8 & 9 conditions are not met in samples; Codes 3 & 6 are Spares
  - Code 20 Invalid or out-of-range inputs – **Flagging all terrain pressure > 1.001 atm.**
  - Descending Flag (+10) **matches Profile Error behavior**


\*Profile and total ozone error flags are switched in the HDF5 output. This should be repaired with the implementation of PCR 27740 in Mx7.0 in Early 2013.

# Examination of South Atlantic Anomaly (SAA) effects and product flagging.



The noise/spikes below show the expected increases when an orbital path falls within the SAA but return to normal levels after passing through it.

The OMPS was designed to use the OMPS Limb Profiler retrievals in the SAA where the OMPS Nadir Profiler is so greatly affected by charged particles that it cannot be used to produce ozone profiles.


Radiance map C. Seftor, SSAI,  
 Flag map Y. Hao, IMSG  
 Radiance Line Plots J. Niu, ERT

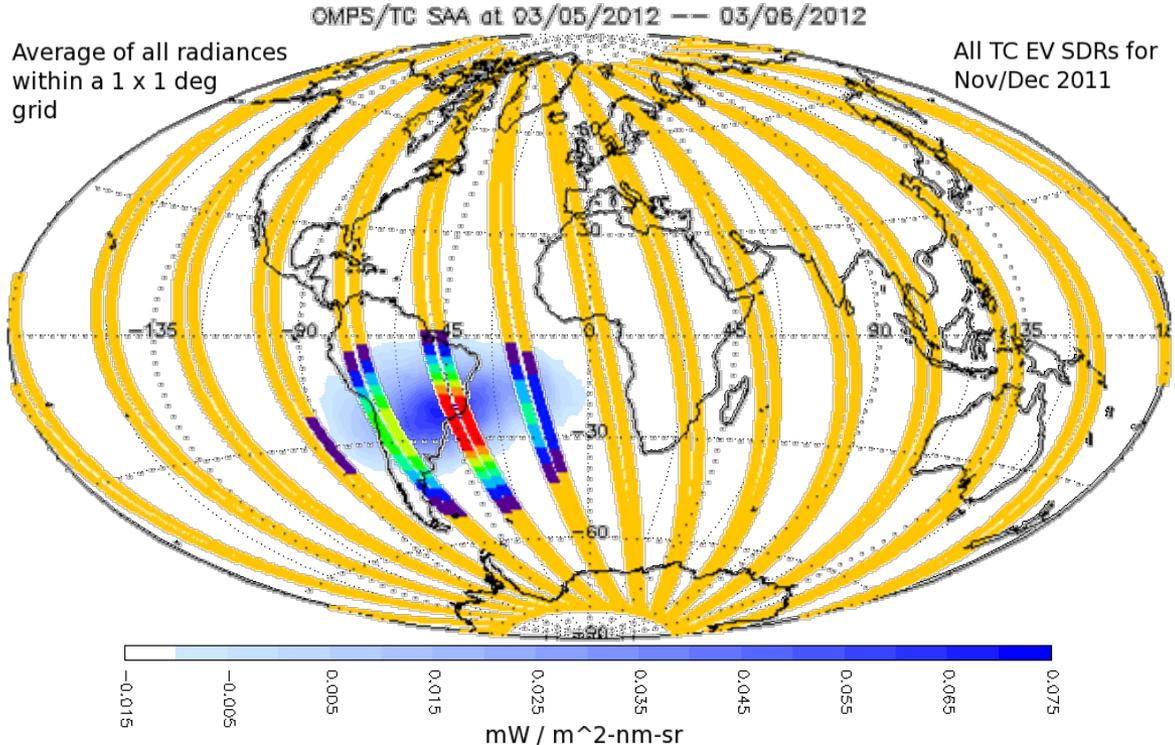


Map of South Atlantic Anomaly effects on OMPS NM closed-door dark current measurements in December and November 2011, overlaid with OMPS NP SAA Flags (0 to 8) for 3/5-6/2012

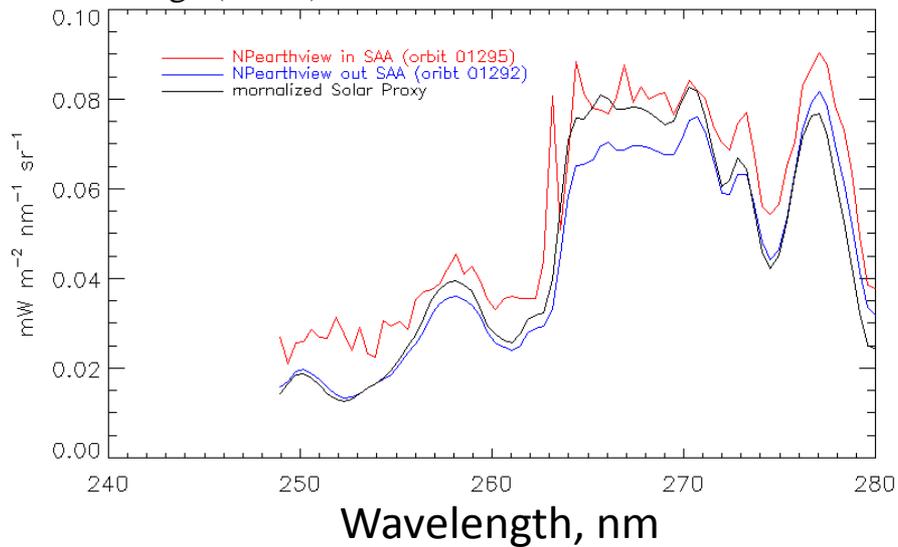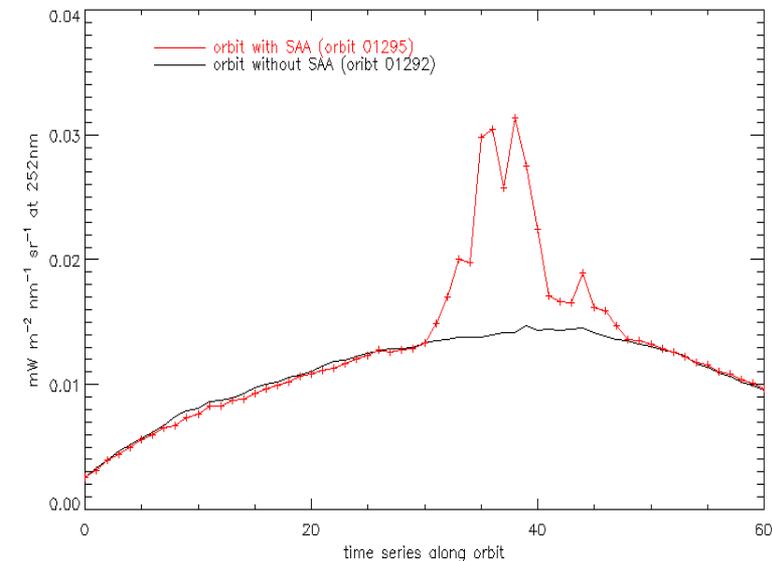

OMPS/IMOP0 SunGlint at 03/05/2012

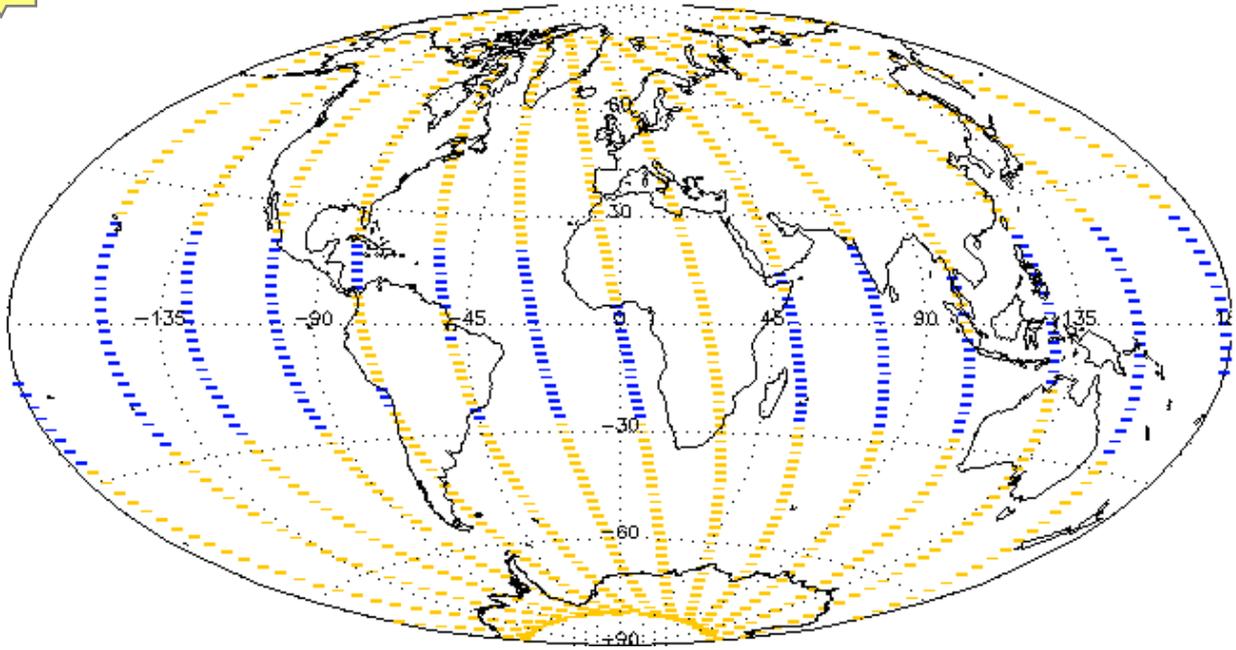


OMPS/INTCO SunGlint at 03/05/2012

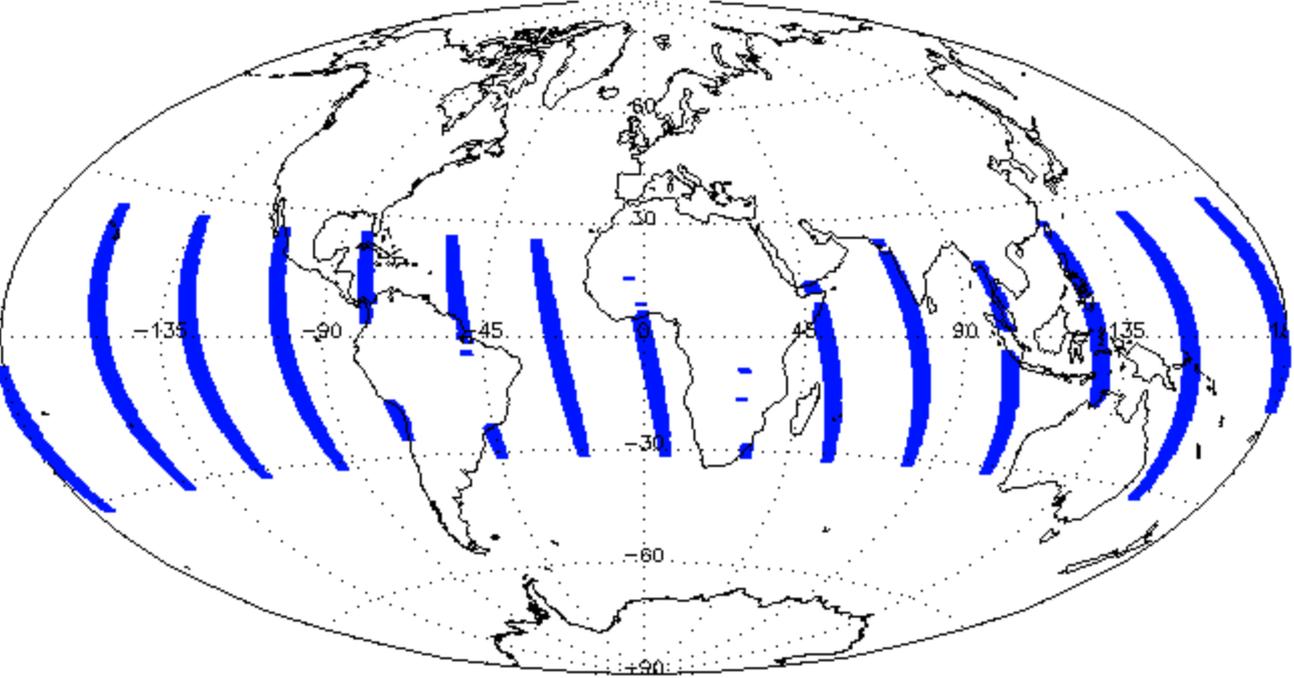

Daily Maps of Sun Glint for INCTO Nadir FOVs versus IMOPO. The two products are consistently and correctly passing these values through from the SDRs.


OMPS/IMOP0 Eclipse at 05/21/2012

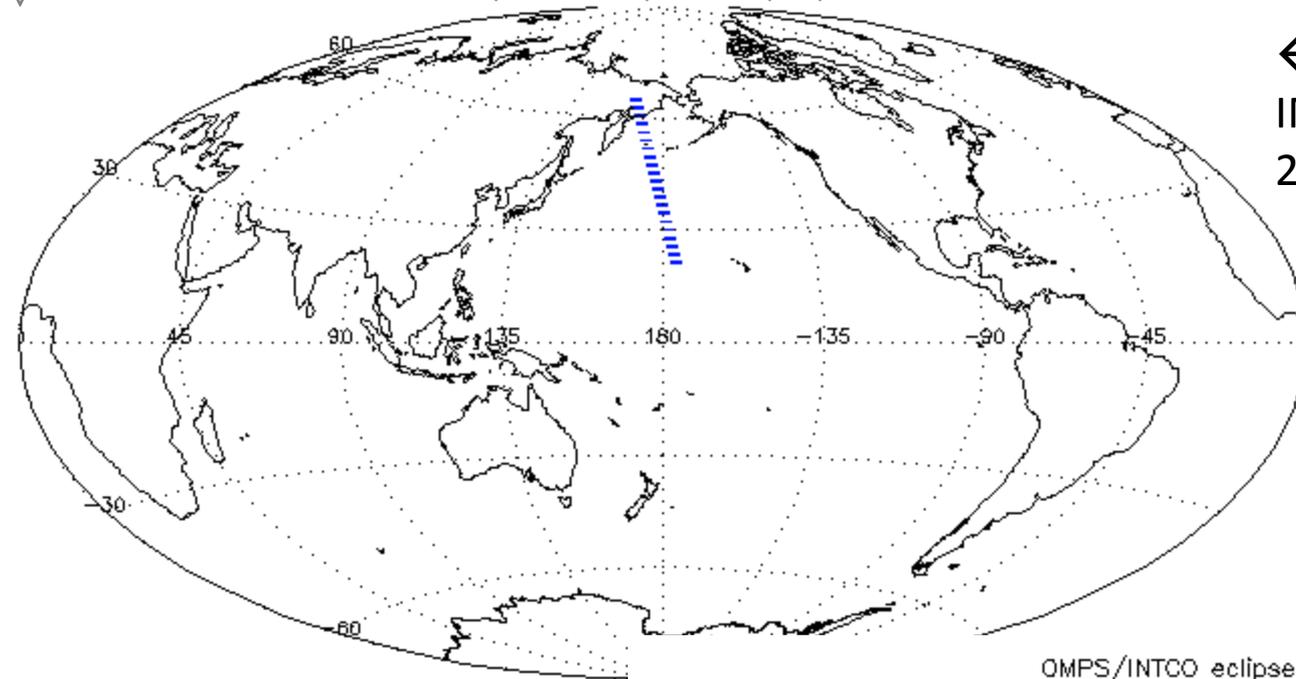

← Map showing locations of IMOP0 Eclipse Flags for May 21, 2012.


The two products are giving correct and consistent results for the near nadir FOVS.

OMPS/INTCO eclipse at 05/21/2012

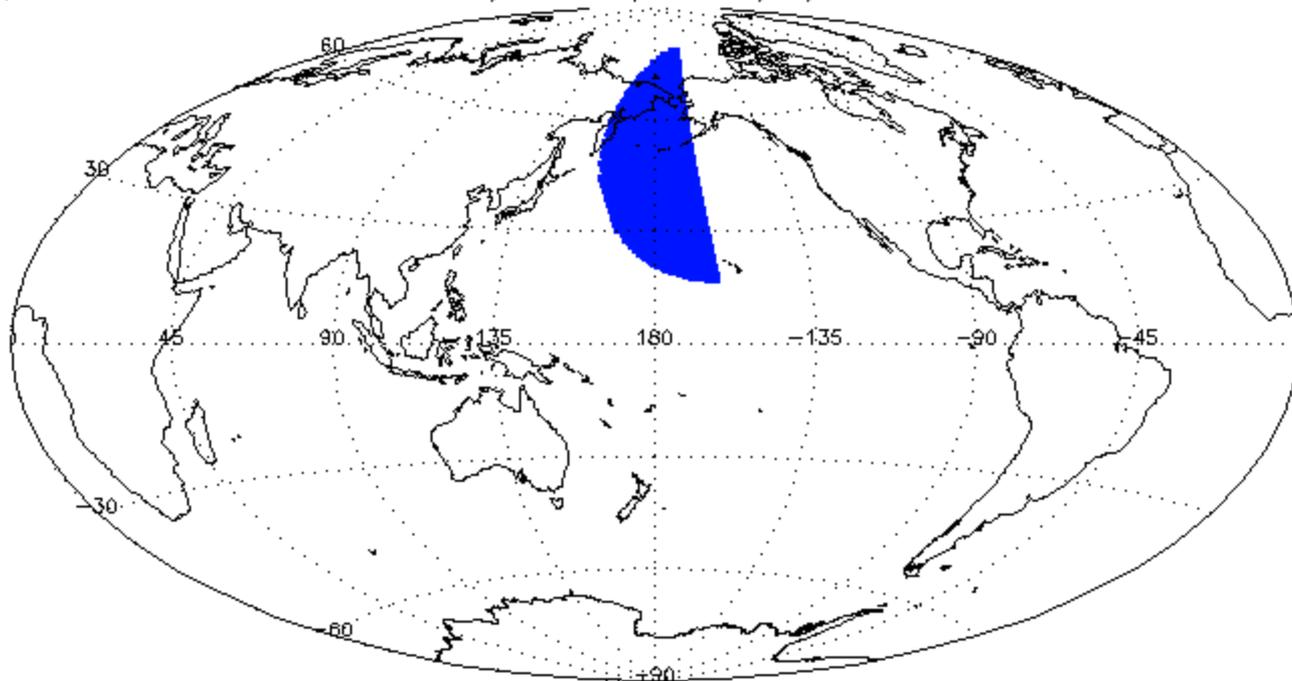

Location of Eclipse Flags for OMPS Nadir Mapper First Guess Total Column Ozone INCTO Product for May 21, 2012. →

# Map of Error Code 20 for IMOPO and of Terrain Pressure > 1.001 atm. for INCTO

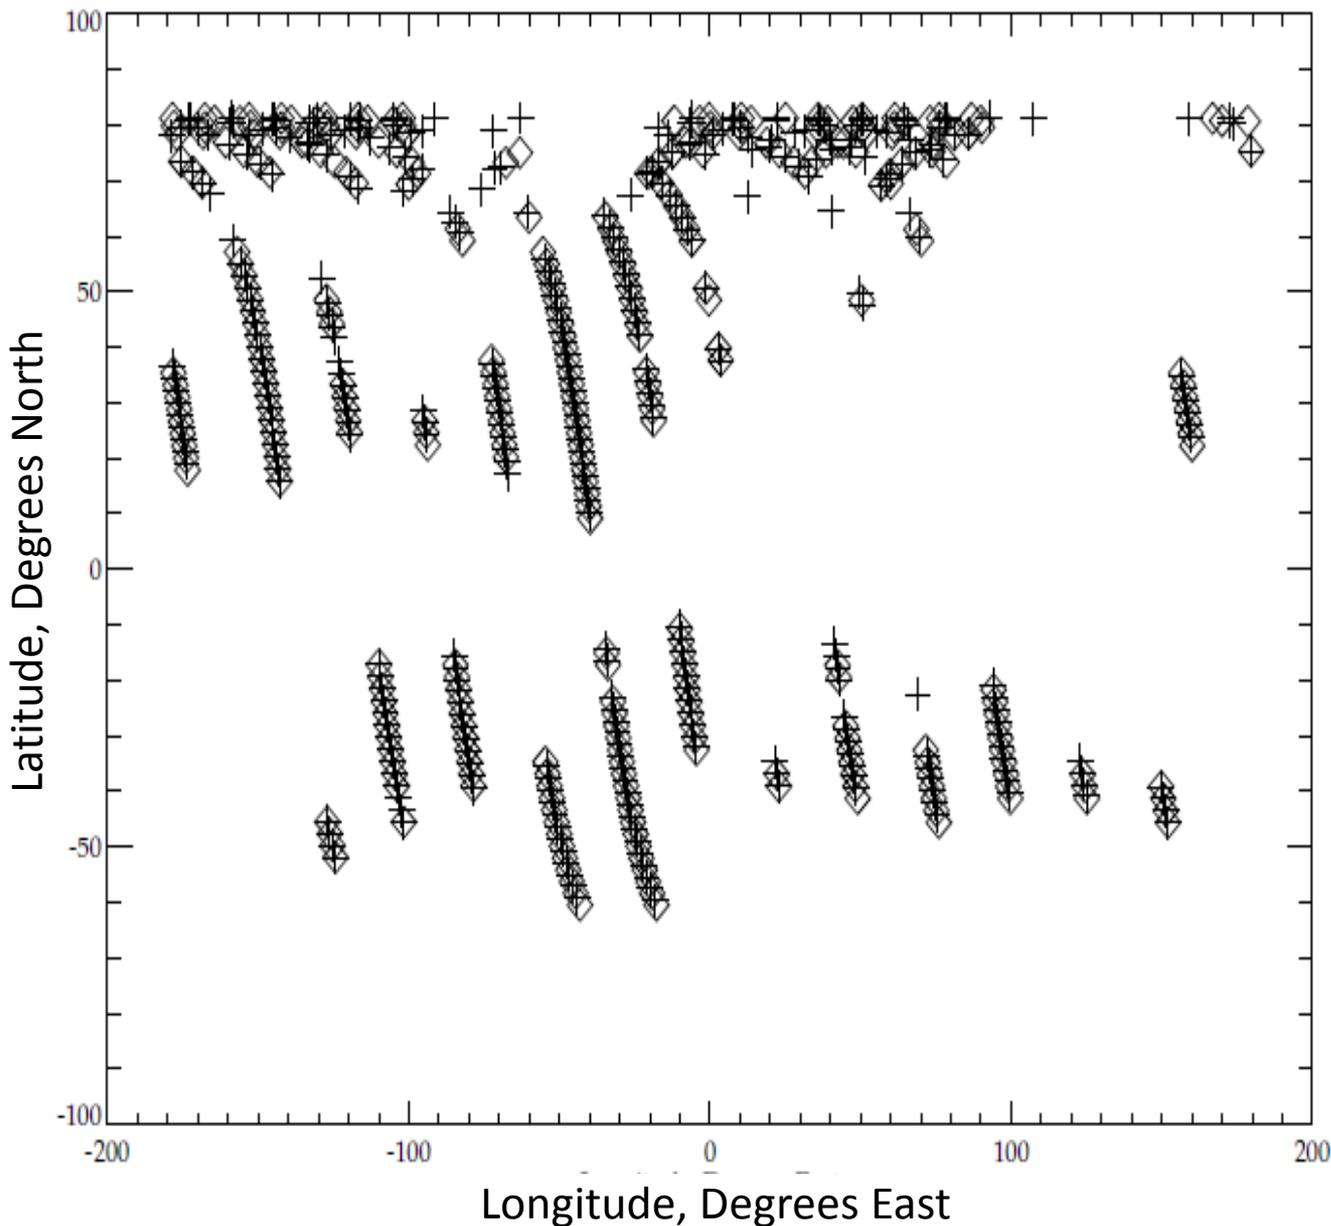


This map shows the location of two sets of conditions. One is the location of Error Code 20 (inputs out of range) for IMOPO for May 16, 2012. The diamond symbols show the locations of these FOVs. The others are the locations where the Nadir Mapper INCTO total column ozone product reports values of terrain pressure greater than 1.001 atm. for the same day. The plus sign symbols are placed where the terrain pressure for the nadir FOV (cross track position 17) for the first row (of five rows) of a Nadir Mapper Granule satisfies this condition. Almost all of the Error Code 20 values are set because of this condition. The check is too restrictive and needs to be reset to a larger value. The highest pressure recorded on Earth was 1.071 atm. The Dead Sea is at ~1.045 atm.


# Time series of Daily Global Percent Good for IMOPO




IMOPO Percent-Good on 01/2013

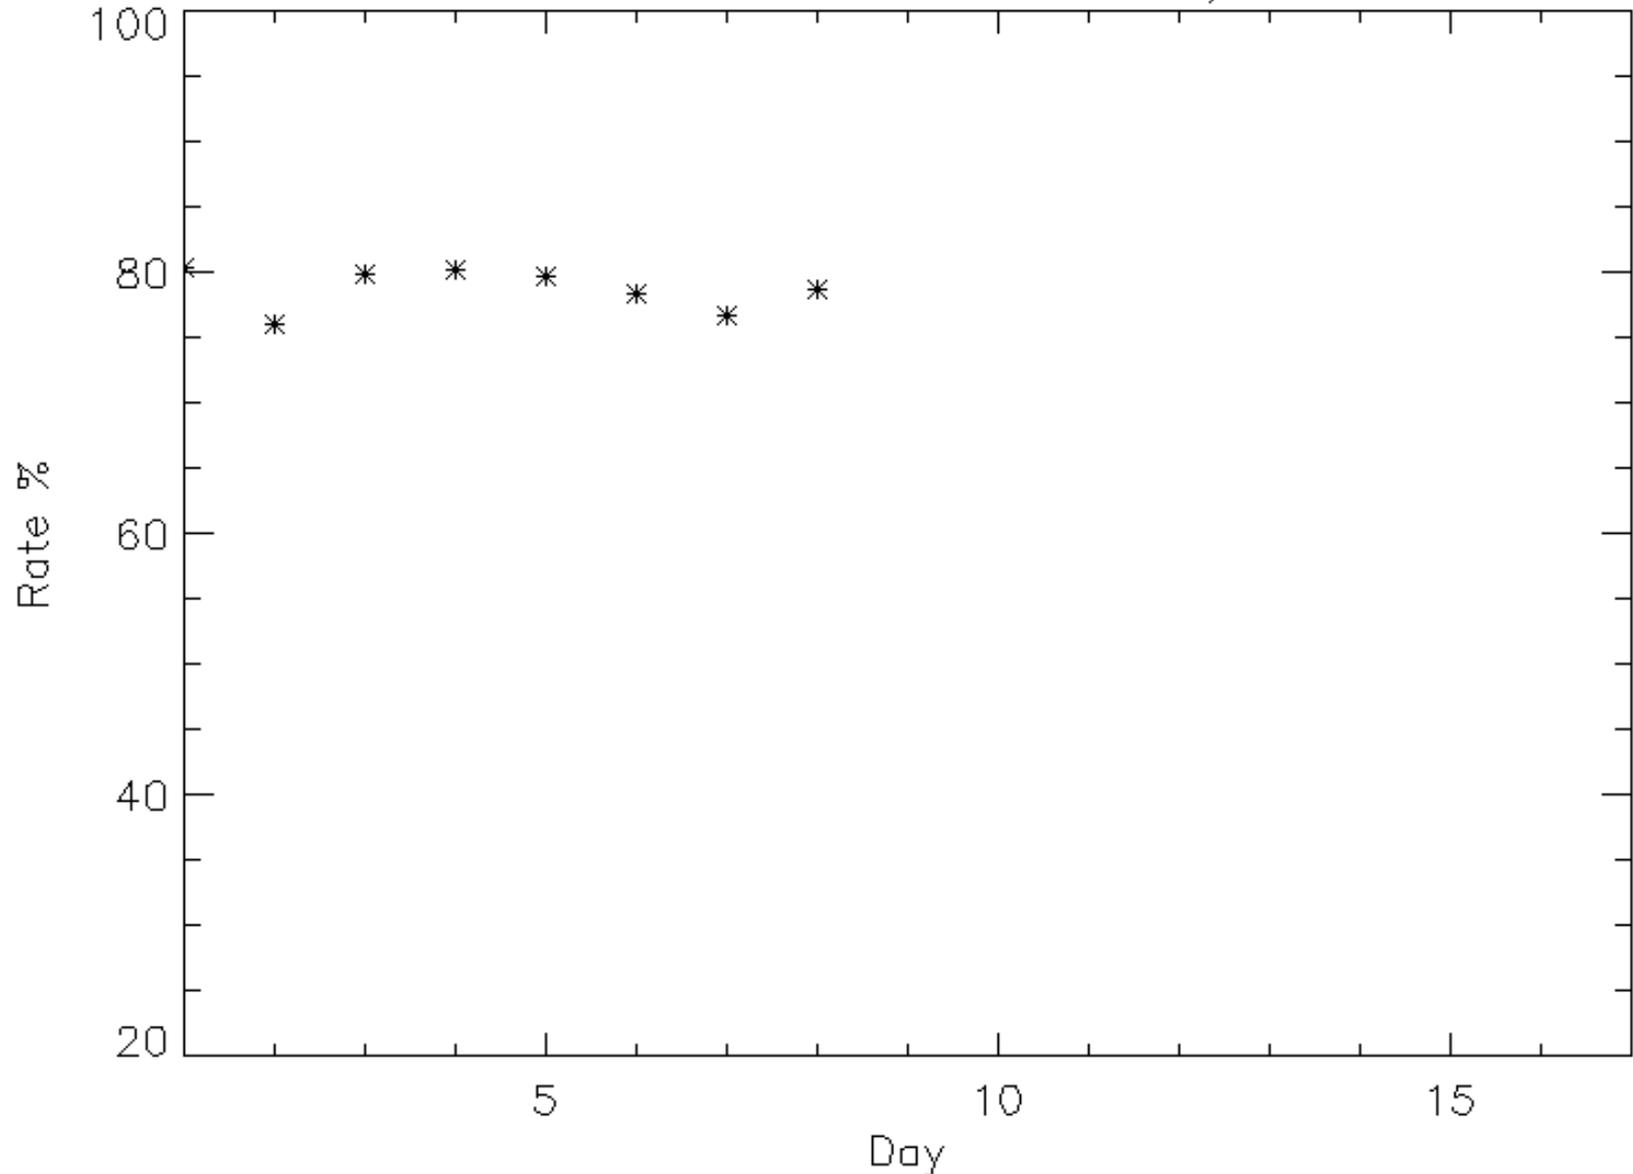

OMPS/IMDPO profile errorFlags at 05/18/2012

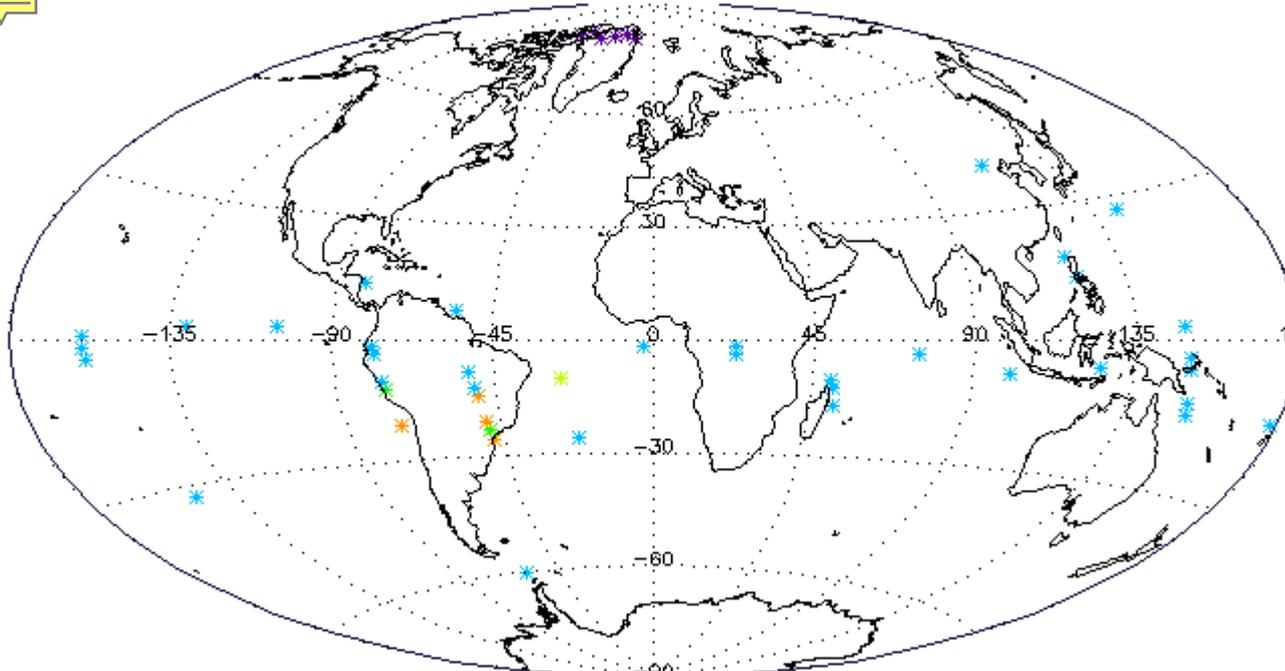

DMPS/IMDPO toz errorcodes at 05/18/2012

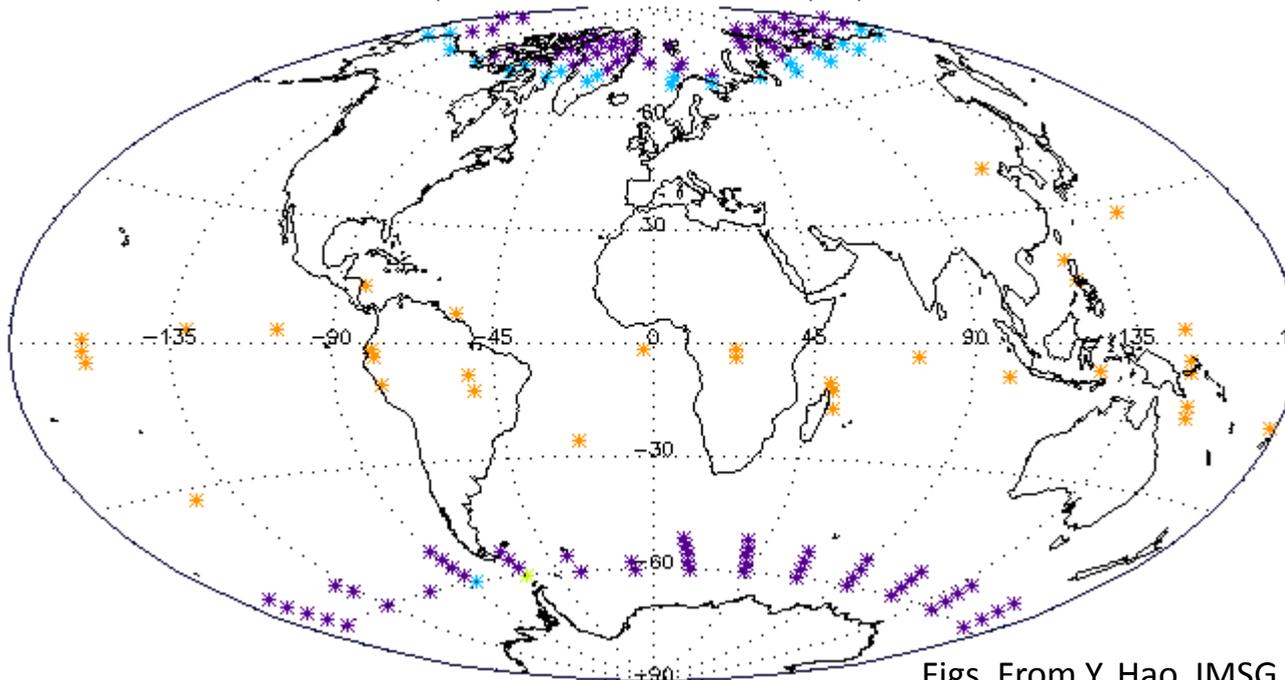



Figs. From Y. Hao, IMSG

These maps show the distribution of non-zero (except for 20s) error codes for IMOP0 May 18, 2012.

The top map shows the locations for the ozone profile errors (**actual not as misnamed in the HDF**). The colors (and frequencies) are as follows: 1 Lower Layer Anomaly (6); 2 Best Total Ozone difference with Profile Total Ozone (34); 3 Large Final Residual (2); 4 Large Initial Residual (1); and 5 C-Parameter Outside of Range (4).










The bottom map shows the locations for the total ozone errors (**again actual**). The colors are as follows: 1 High Path (100); 2 Very High Path (23); 4 Pair Total Ozone Difference (1); and 5 same as Profile Code 2 (33).

# Time series of initial V6PRO residuals for OMPS NP for 2012

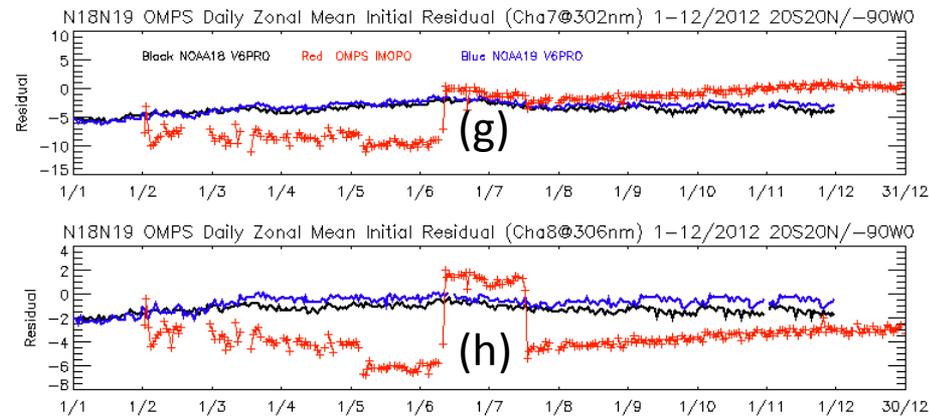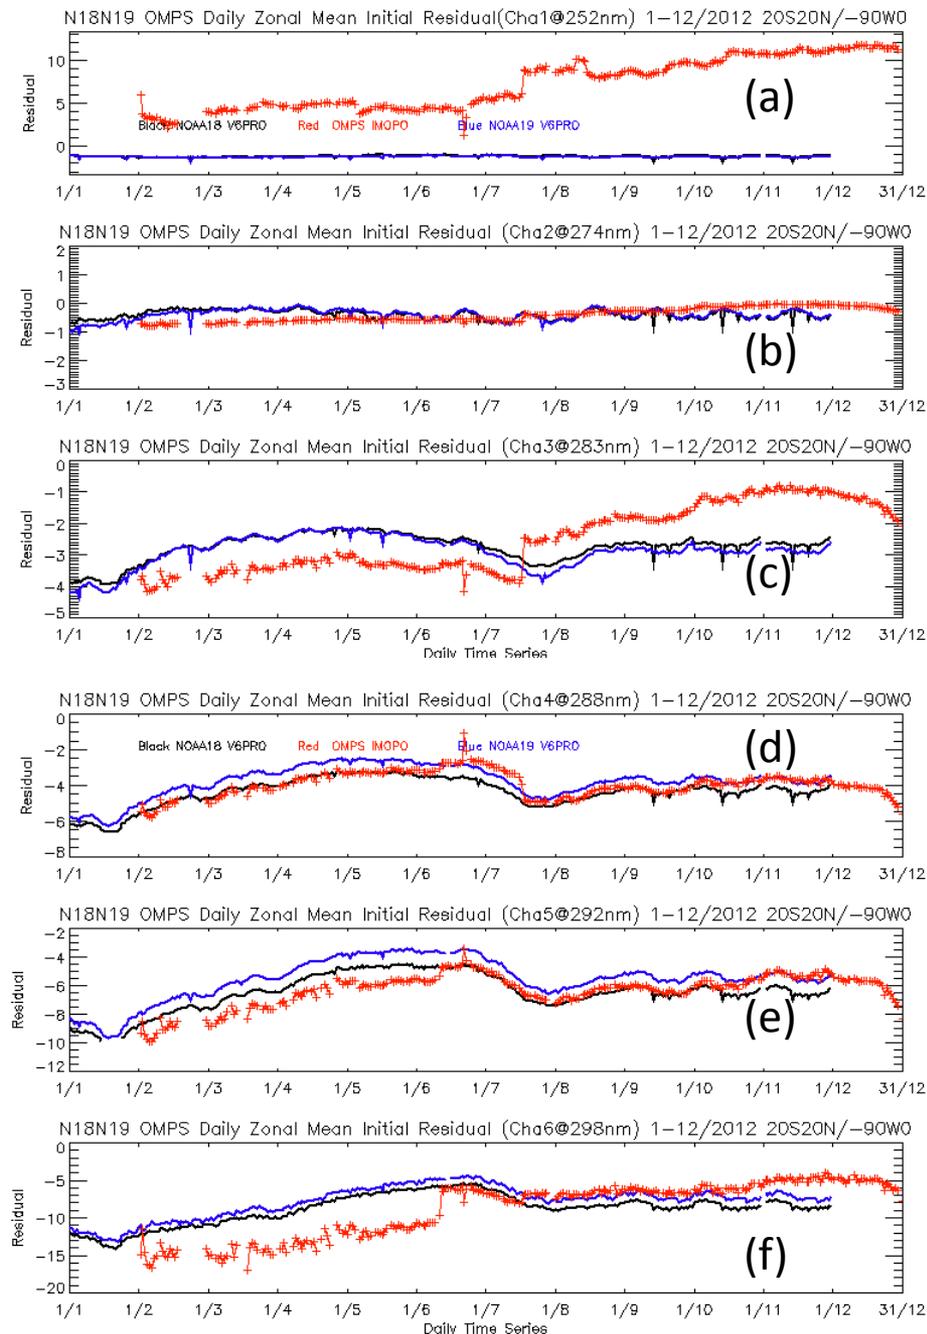


The eight figures show the initial residuals for profile wavelengths [252, 274, 283, 288, 292, 298, 302, 306 and, (a) to (h), respectively] for the V6PRO (IMOPO) product from **OMPS** compared to the V6PRO product for the operational **NOAA-18** and **NOAA-19** SBUV/2 for the equatorial daily zonal means (20N to 20S) with 0-90W removed to avoid the SAA effects. The residuals are in N-values (1 N ~ 2.3%). The time period is the end of February through December of 2012. The residuals are computed with respect to differing first guess profiles especially with respect to the use of the shortest channel. The jump in the initial residuals in early June is coincident with the introduction of a new Day 1 Solar Spectrum for the Nadir Mapper.

# Time series of initial V8PRO residuals for OMPS NP February through December

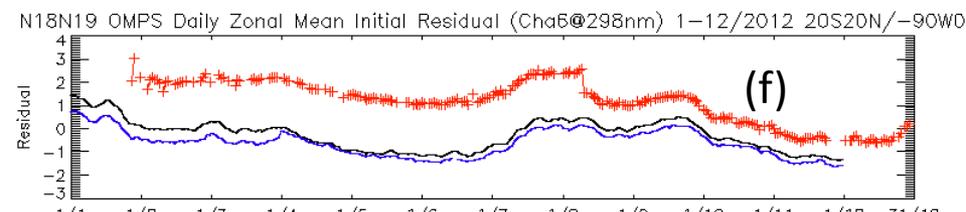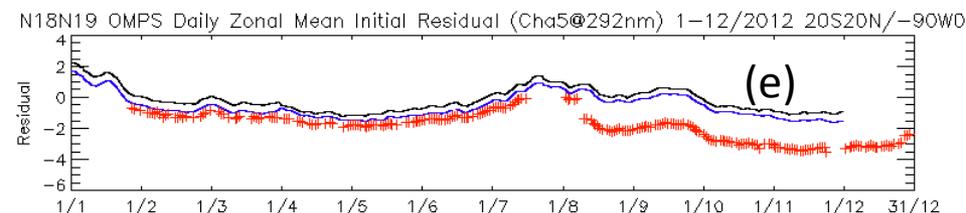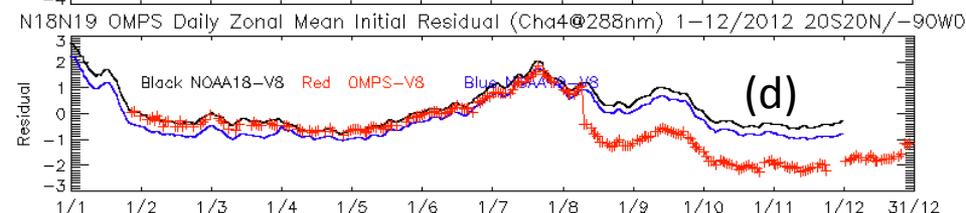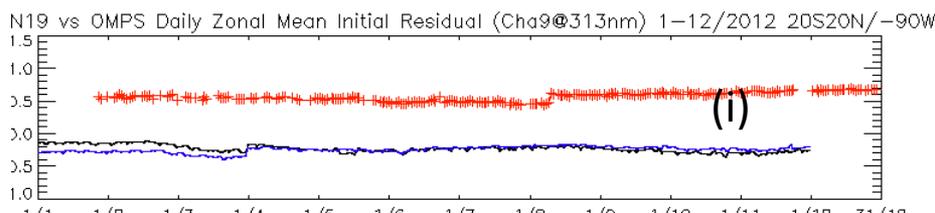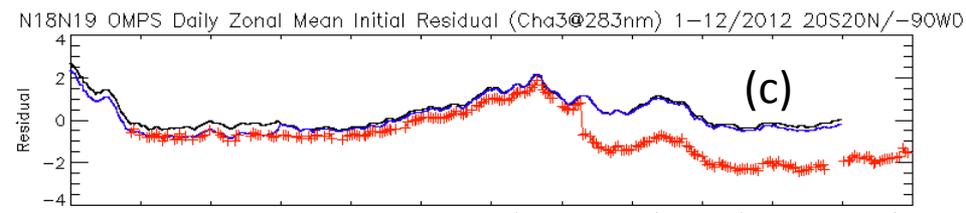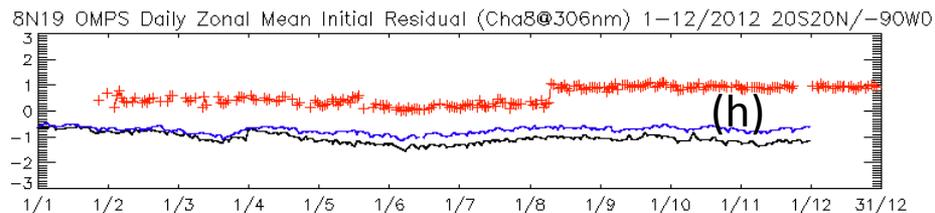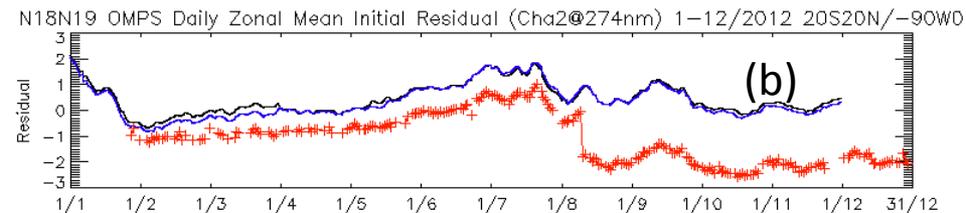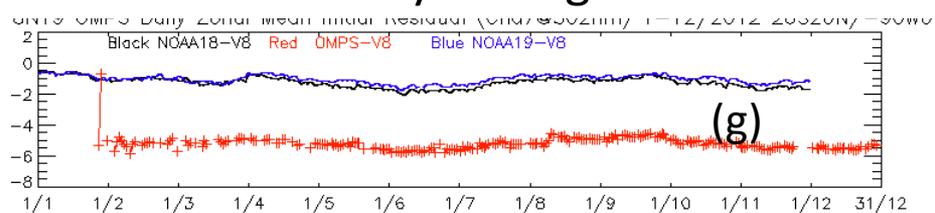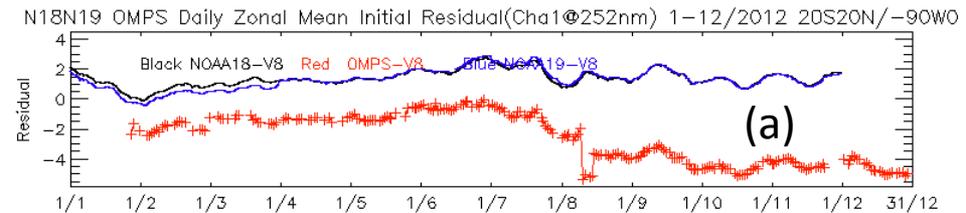


The nine figures show the initial measurement residuals for profile wavelengths [252, 274, 283, 288, 292, 298, 302, 306 and 313 nm, (a) to (i) in order, respectively] for the V8PRO product from **OMPS** compared to the same product for the operational **NOAA-18** and **NOAA-19** SBUV/2 for the equatorial daily zonal means (20N to 20S) with 0-90W removed to avoid the South Atlantic Anomaly. The residuals are in N-values (1 N ~ 2.3%). The time period is 2012(Feb to Dec for OMPS). Notice that the shorter wavelengths' residuals for OMPS, have maintained their offsets allowing for the large shifts taking place in August when the new solar came into use with the OMPS V8Pro.

# Well-matched Orbits for May 16, 2012

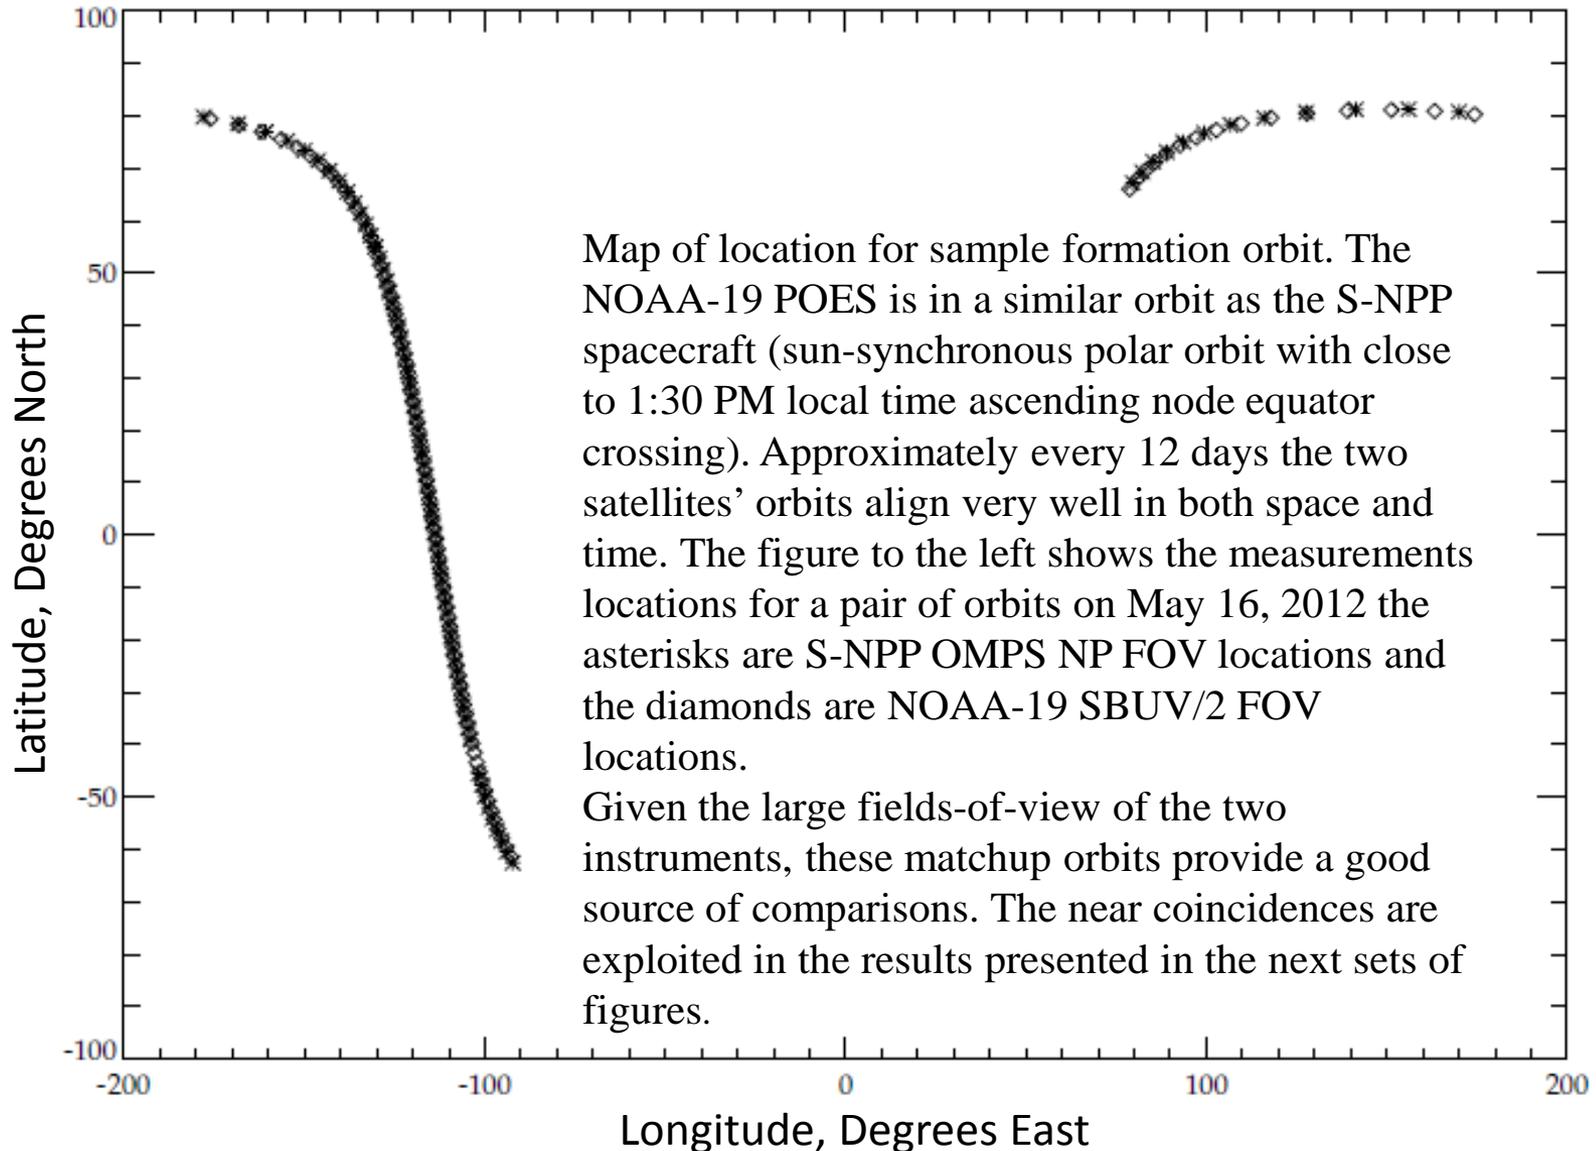


# Reflectivity Comparisons to INCTO & SBUV/2

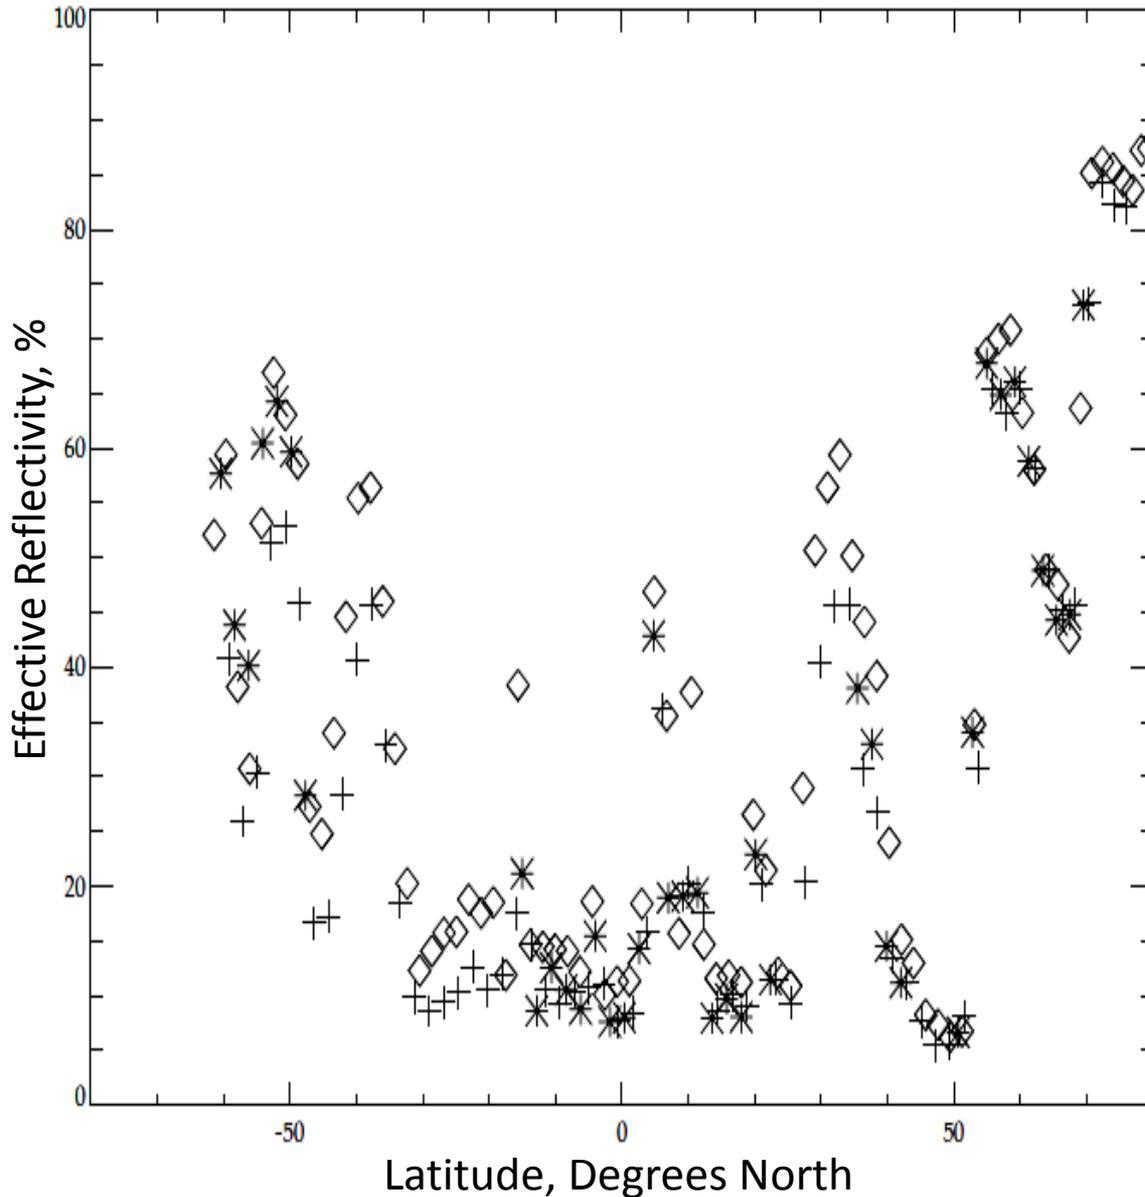

Comparisons of effective reflectivity estimates between IMOPO and the OMPS total ozone first guess product (INCTO) and between IMOPO and the NOAA-19 SBUV/2 processed with the Version 6 ozone profile retrieval algorithm. The data are from a single pair of orbits on May 16, 2012 where the two satellites are flying in formation (orbital tracks within 50 KM and sensing times with 10 minutes). The OMPS Nadir Profiler values are shown with asterisks (\*), the OMPS Nadir Mapper values are shown with plus signs (+) and the SBUV/2 are shown with diamonds (<>). A significant number of the OMPS Nadir Profilers retrievals produce fill values because of Error Codes incorrectly set to 20.

# Total Ozone Comparisons to INCTO & SBUV/2

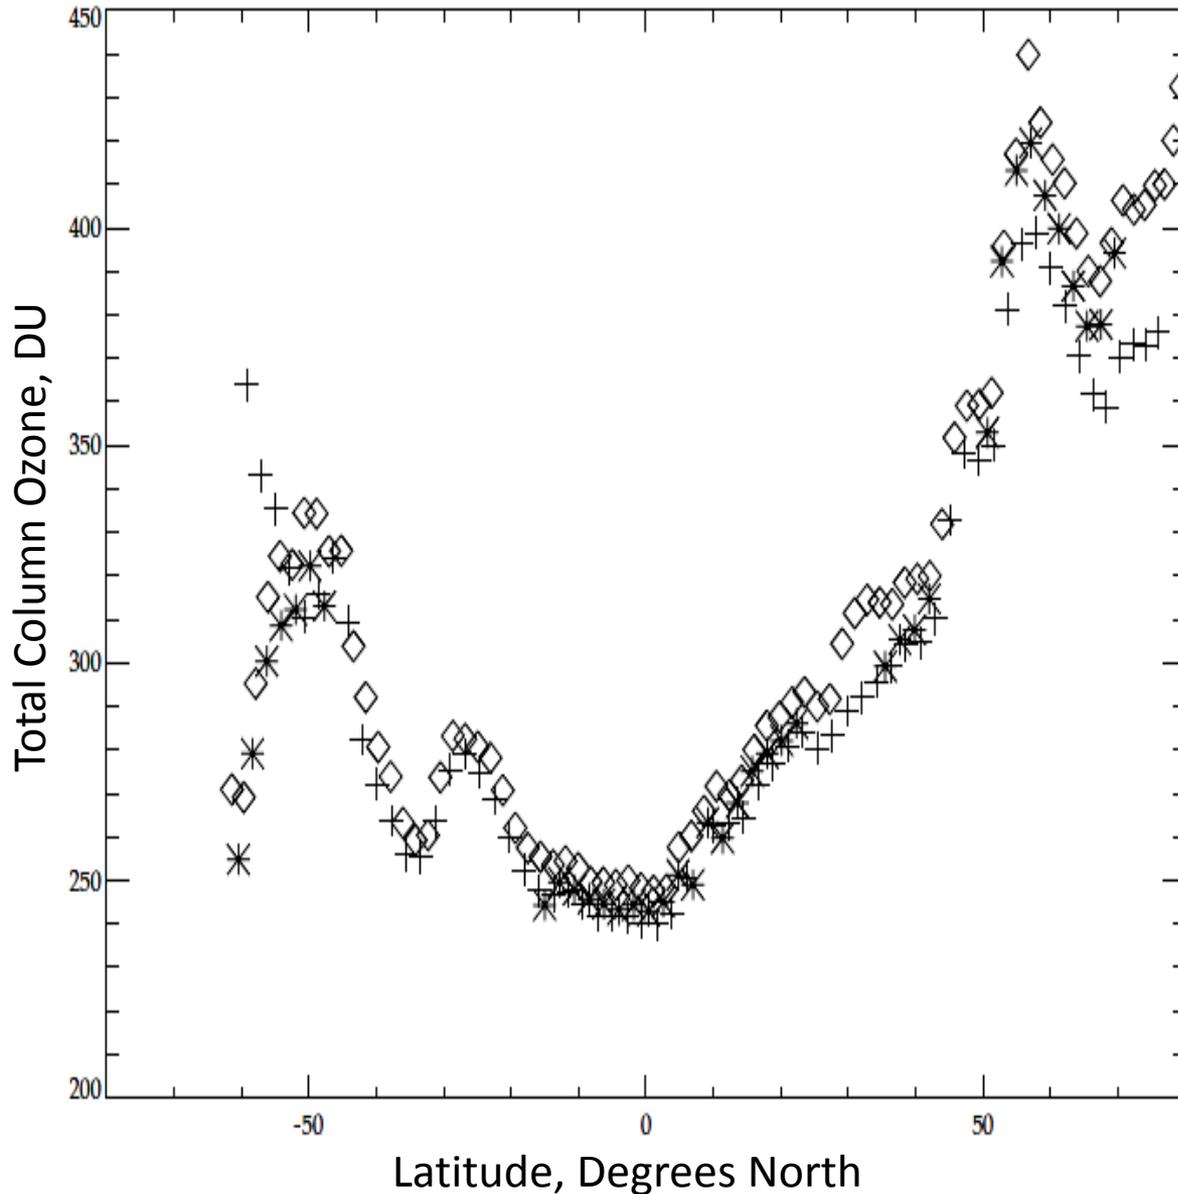

Comparisons of total column ozone estimates between IMOPO and the OMPS total ozone first guess product (INCTO) and between IMOPO and the NOAA-19 SBUV/2 processed with the Version 6 ozone profile retrieval algorithm. The column amounts are the profile totals for the two Version 6 products. The data are from the same pair of orbits on May 16, 2012 used for the previous slide. The OMPS Nadir Profiler values are shown with \* (asterisks), the OMPS Nadir Mapper values are shown with + (plus signs) and the SBUV/2 are shown with  $\diamond$  (diamonds). A significant number of the OMPS Nadir Profilers retrievals produce fill values because of Error Codes incorrectly set to 20.

# Profile Comparisons between OMPS & SBUV/2 V6Pro

The figures on the next two slides show comparisons of the ozone profile retrievals estimates between IMOPO and the NOAA-19 SBUV/2 processed with the Version 6 ozone profile retrieval algorithm. The data are from another single pair of orbits on May 16, 2012 where the two satellites are flying in formation (orbital tracks within 50 KM and sensing times with 10 minutes).

The next slide compares the ozone profile retrievals in 12 pressure layers in Dobson Units versus Latitude. The 12 layers are defined by the following 13 layer boundaries:













[0.0,0.247,0.495,0.99,1.98,3.96,7.92,15.8,31.7,63.3,127.0,253.0,1013] hPa.

The top three layers' results are in the top row with the topmost layer on the upper left. The lowest layer's results are in the figure on the bottom right. **The OMPS Nadir Profiler values are in Pink** and the **SBUV/2 are shown in Black**. A significant number of the OMPS Nadir Profilers contain fill values because of Error Codes incorrectly set to 20.

The second slide shows the results of comparison for the ozone mixing ratios at 19 pressure levels: [0.3,0.4,0.5,0.7,1.0,1.5,2.0,3.0,4.0,5.0,7.0,10.,15.,20.,30.,40.,50.,70.,100.] hPa.




















The arrangement from top to bottom follows the same convention as for the layers.

The two sets of figures show similar results with general agreement between the retrievals for the two instruments but with the OMPS NP retrieving much smaller values at the top of the profiles. This is probably due to the inaccuracies in the initial calibration of the shorter wavelength channels but could also be symptomatic of stray light in the shorter wavelength channels providing information at those levels.

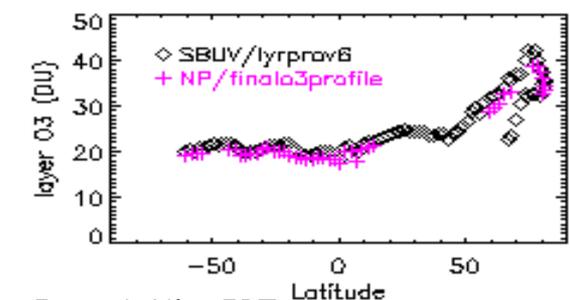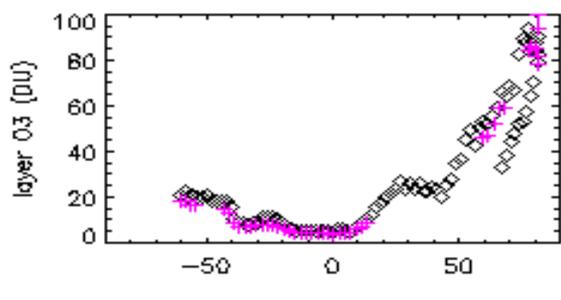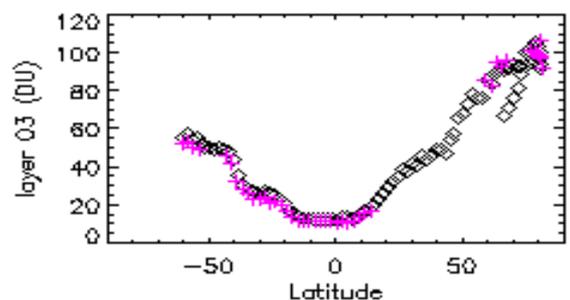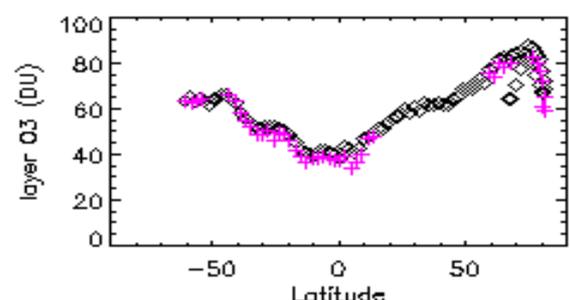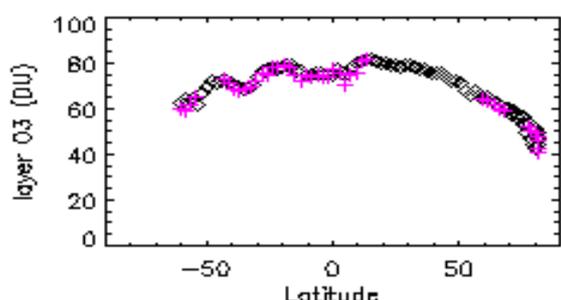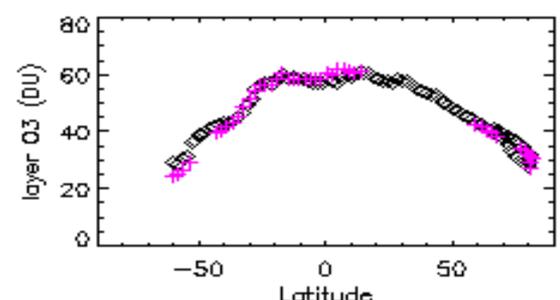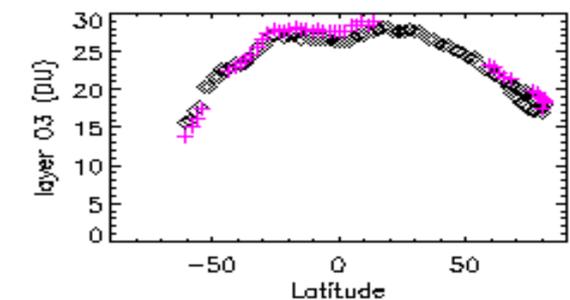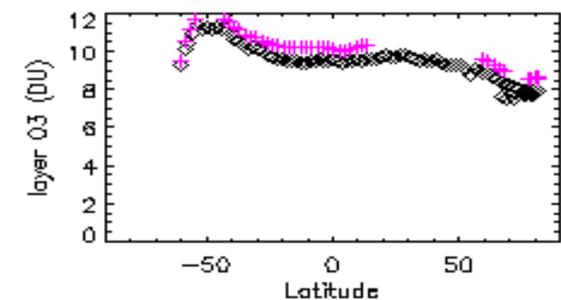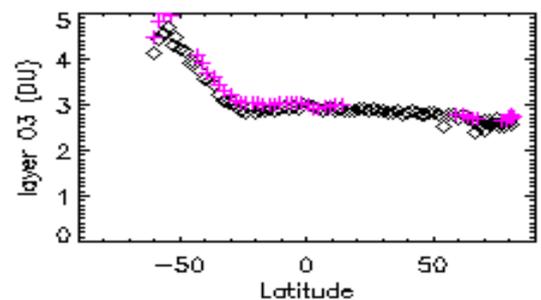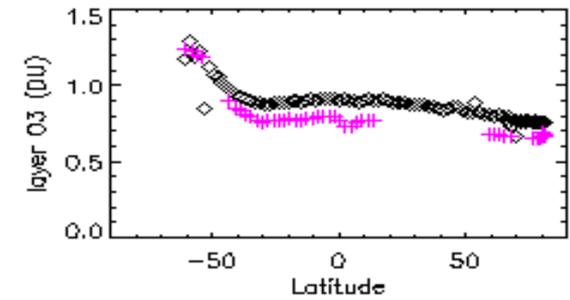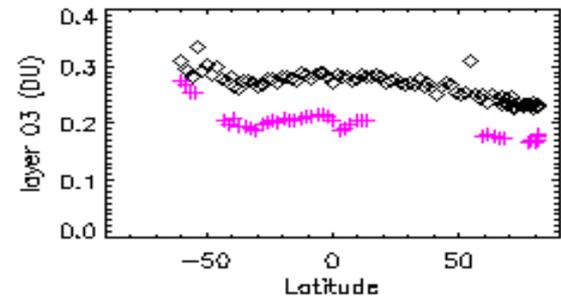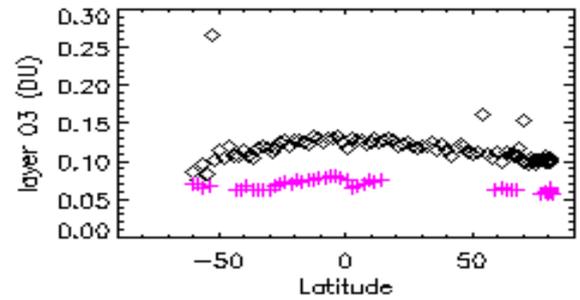

Latitude, Degrees North


From J. Niu, ERT

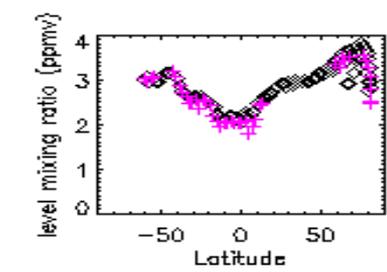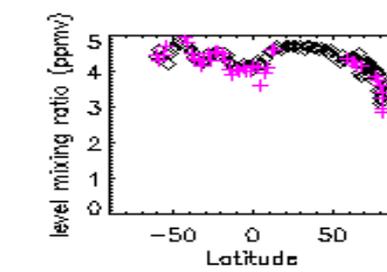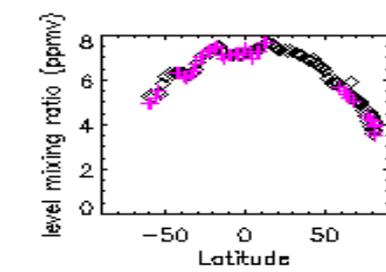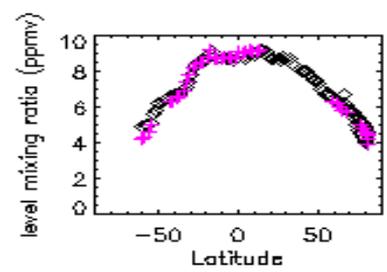

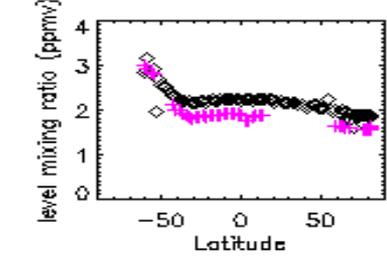
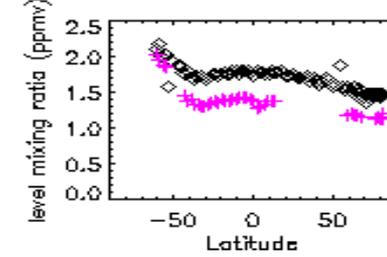
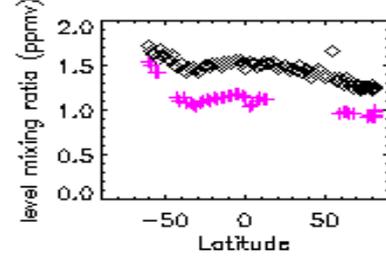
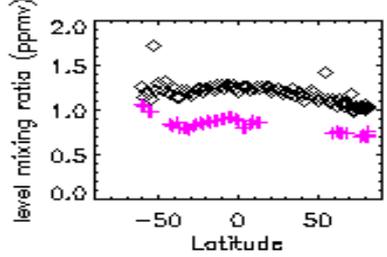


From J. Niu, ERT







# Well-matched Orbits for November 29




















OMPS and NOAA-19 chasing orbit for 20121129

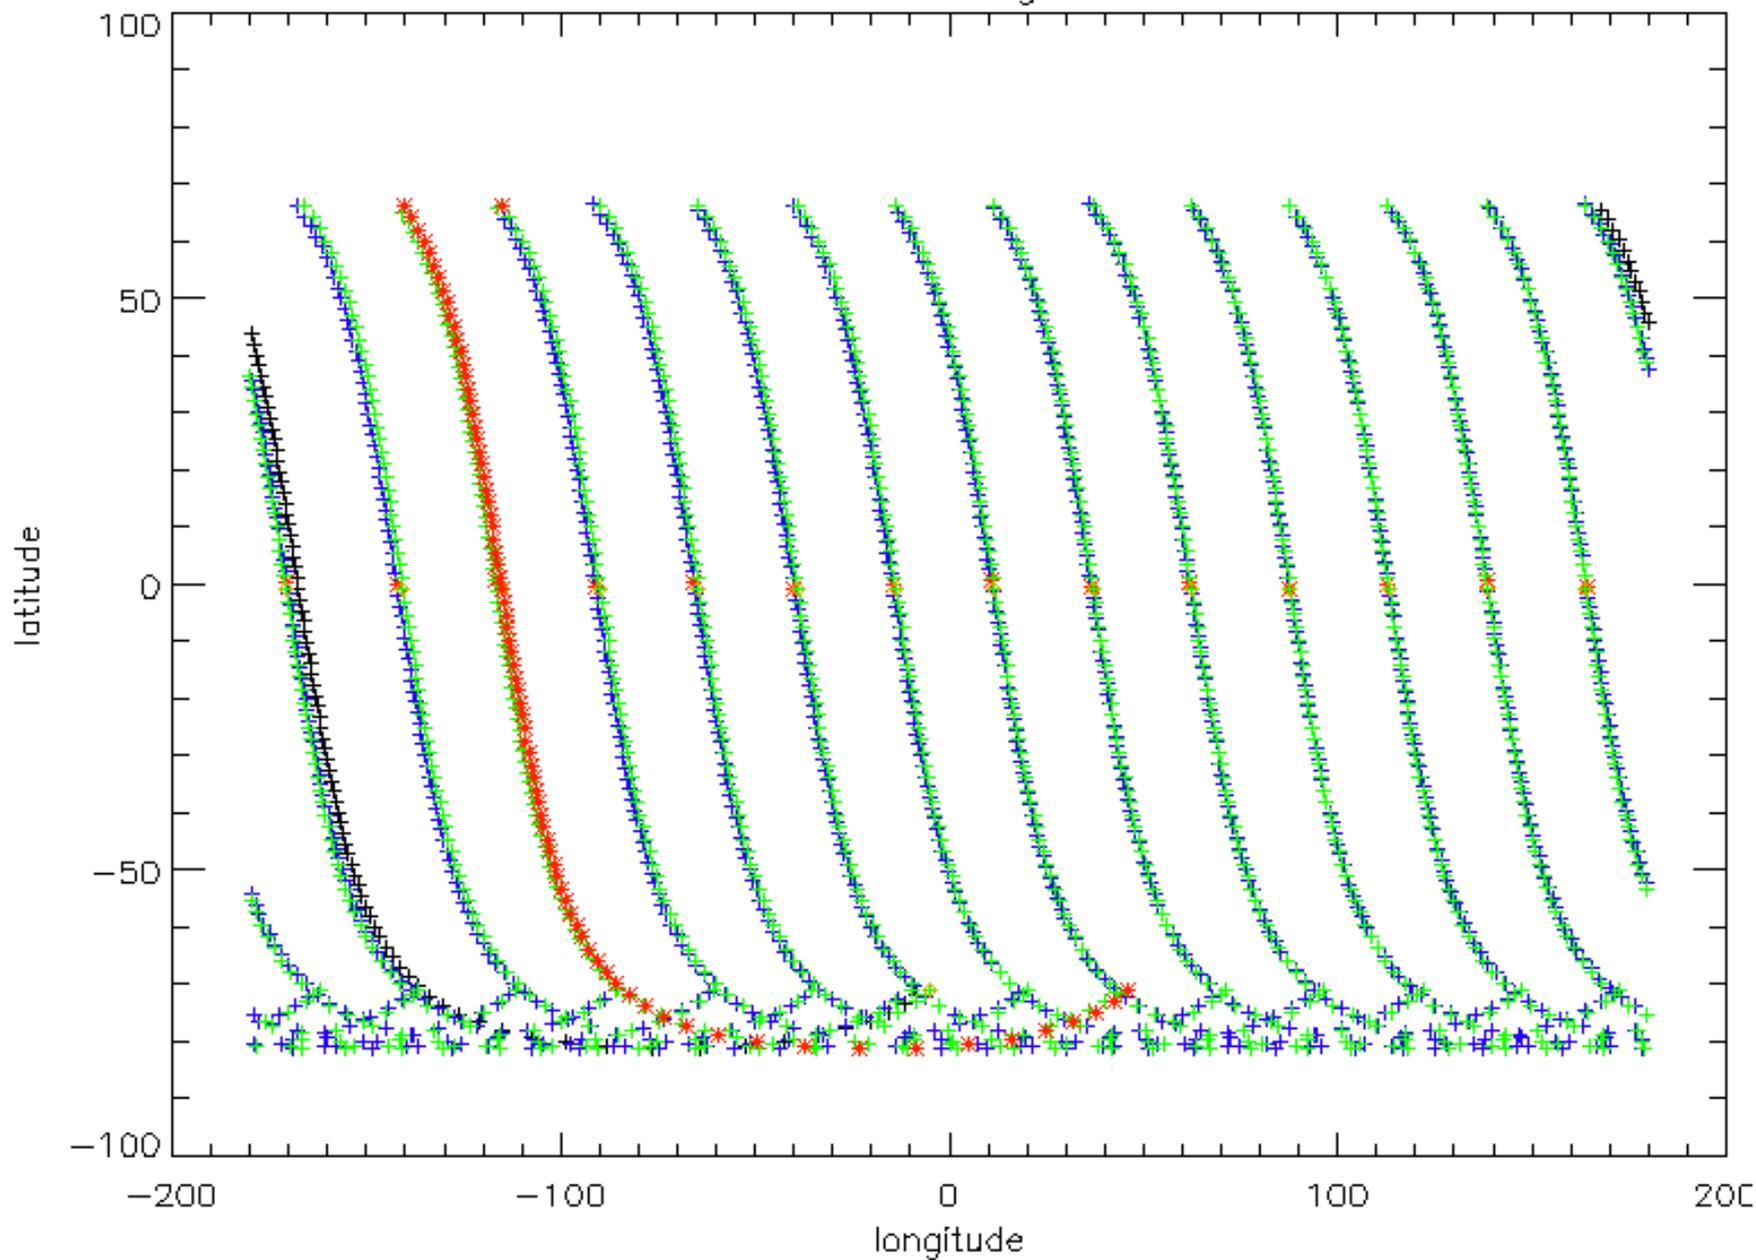

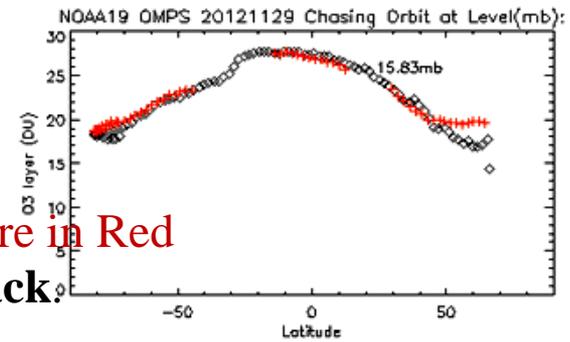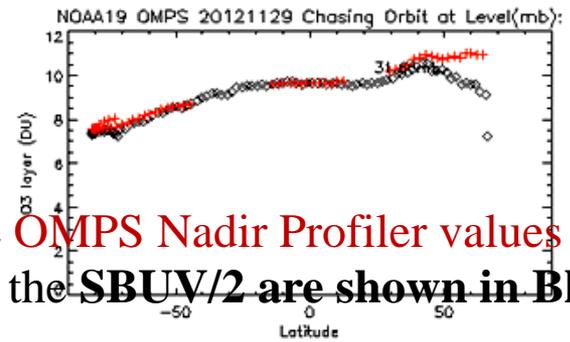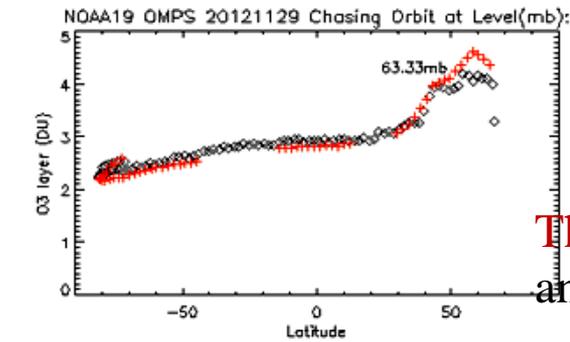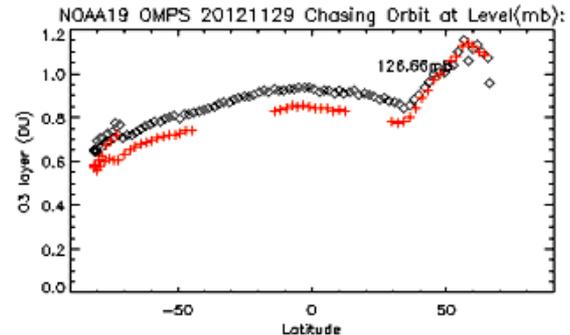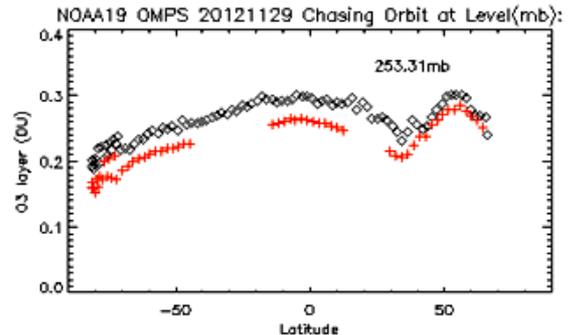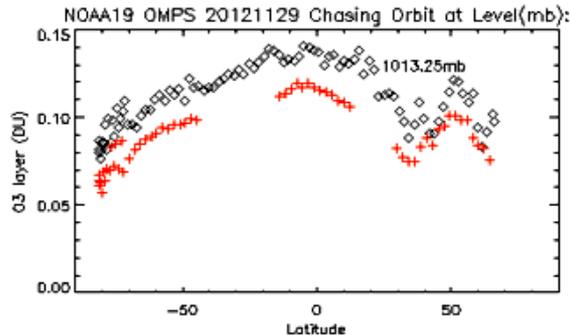

The OMPS Nadir Profiler values are in Red  
and the SBUV/2 are shown in Black.

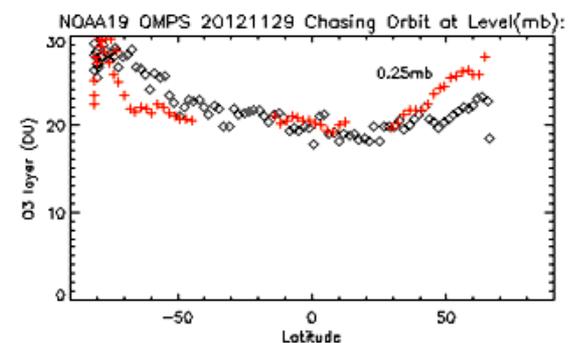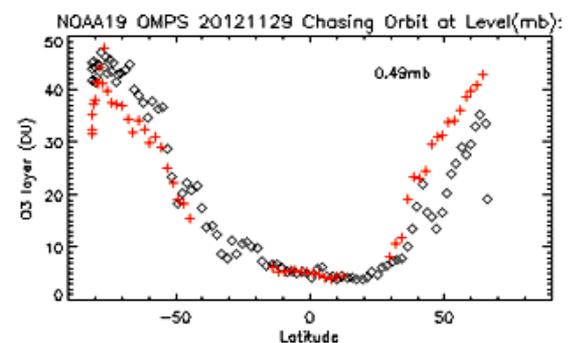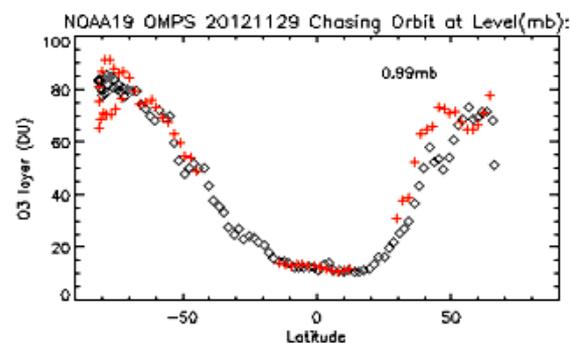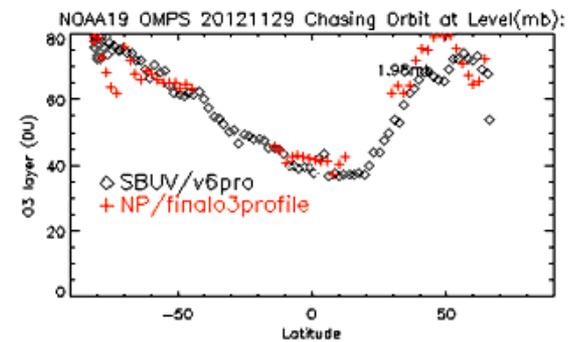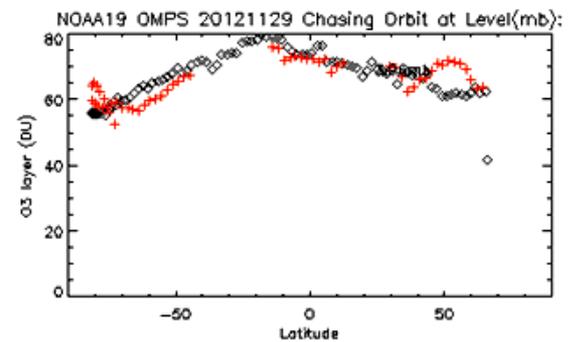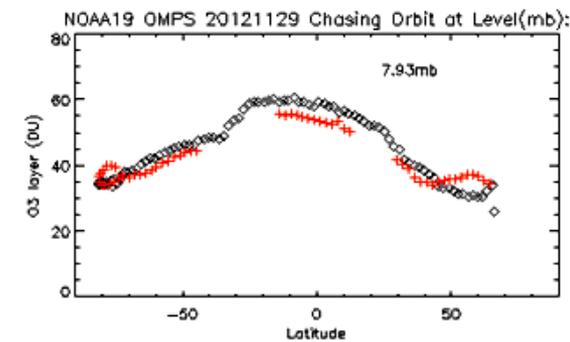

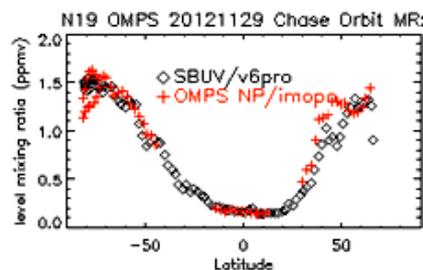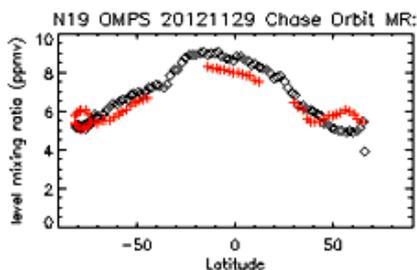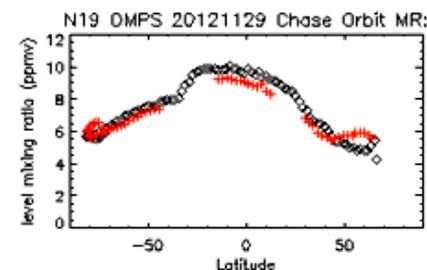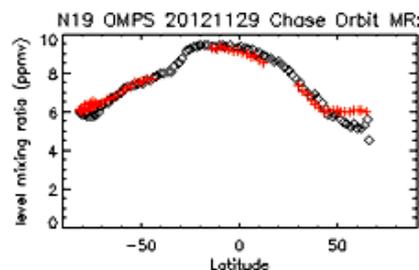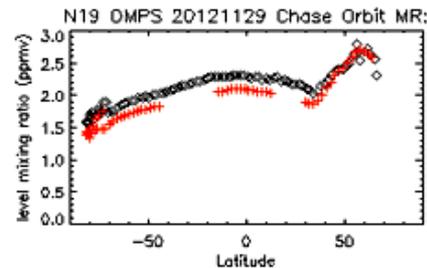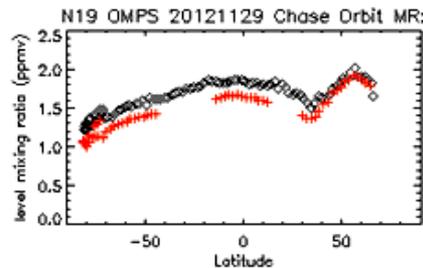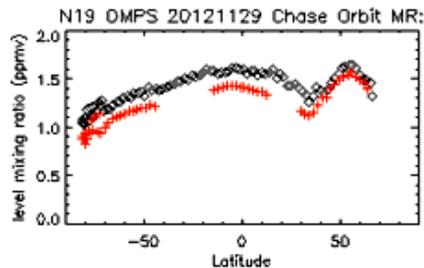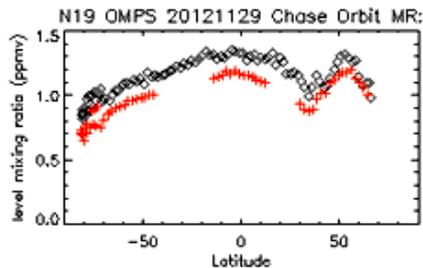

# Comparisons between OMPS & MLS

The figures on the next two slides show differences between N-values ( $-100 * \log_{10}$  of top-of-atmosphere albedos) as measured by the OMPS at nadir with those calculated/predicted by using the TOMRAD radiative transfer code with EOS Aura MLS ozone profiles from matchup retrievals and OMPS viewing conditions for solar zenith angles and effective 340 nm reflectivity.





Most of the variations and features can be explained by or are expected from known characteristics of the OMPS SDRs. These include the following:

1. Offset between NP and NM for 300-310 nm – calibration differences including solar.
2. Drop off of NM near 300 nm – stray light in the NM as the dichroic cuts off the signal.
3. Dips down at solar features, e.g., at 280 nm and 285 nm – stray light as additive error for the NP and lower signal at solar lines (Ring effect filling also contributes).
4. Noise-like features for NP measurements within the SAA – charged particles affect a larger fraction of the measurements as the current data is aggregated over 100 spatial pixels and 38 S.
5. Slope of differences for non-absorbing wavelengths from 330 to 350 nm – wavelength dependent effects of absorbing aerosols on effective reflectivity.


Comparison of radiance/irradiance ratios from OMPS with forward model calculations using EOS Aura Microwave Limb Sounder ozone profile retrievals as input. The **Blue points** are differences in N-value (1 N-value Unit  $\sim 2.3\%$ ) for the OMPS Nadir Profiler measurements with the MLS predicted values and the **Green points** are the differences for measurements averaged over the near-Nadir FOVs for the OMPS Nadir Mapper with the MLS predicted values.



## OMPS and MLS Matchups within $\pm 20^\circ$ Latitudes, June, 2012 (page 1)

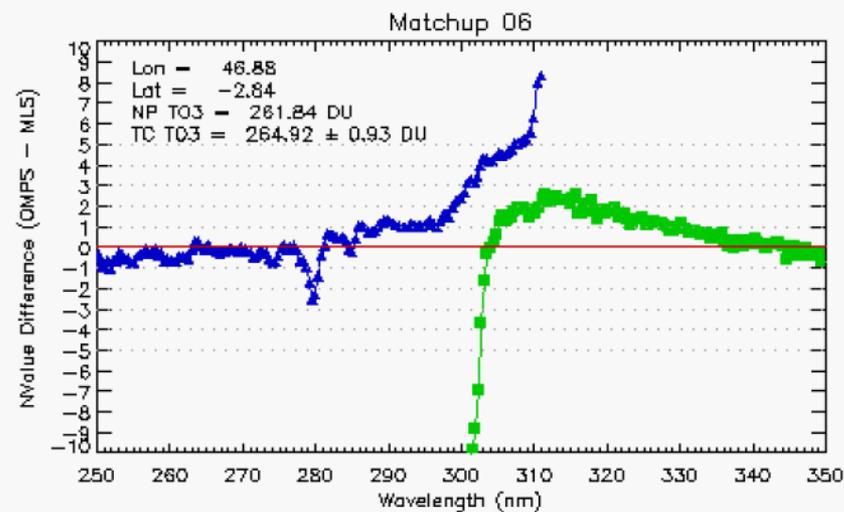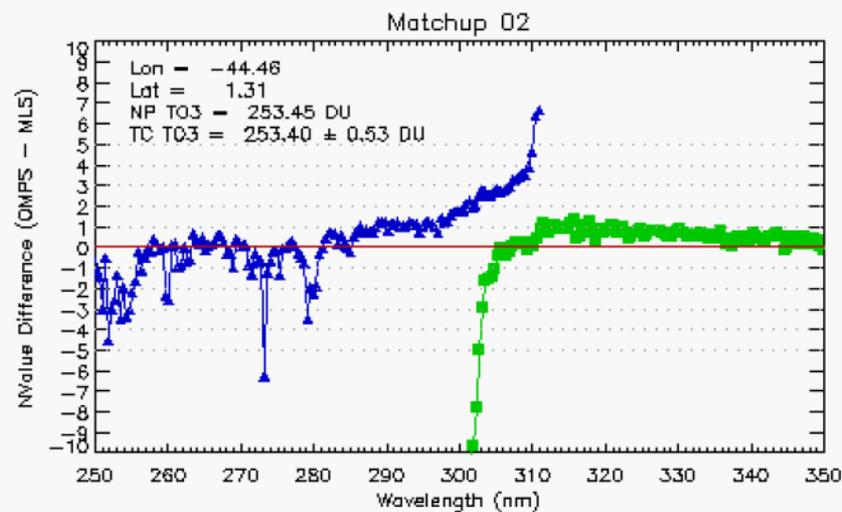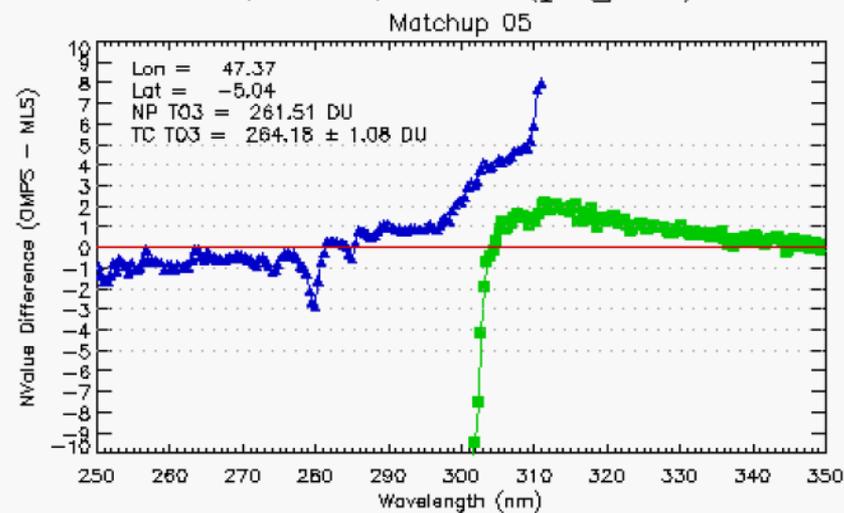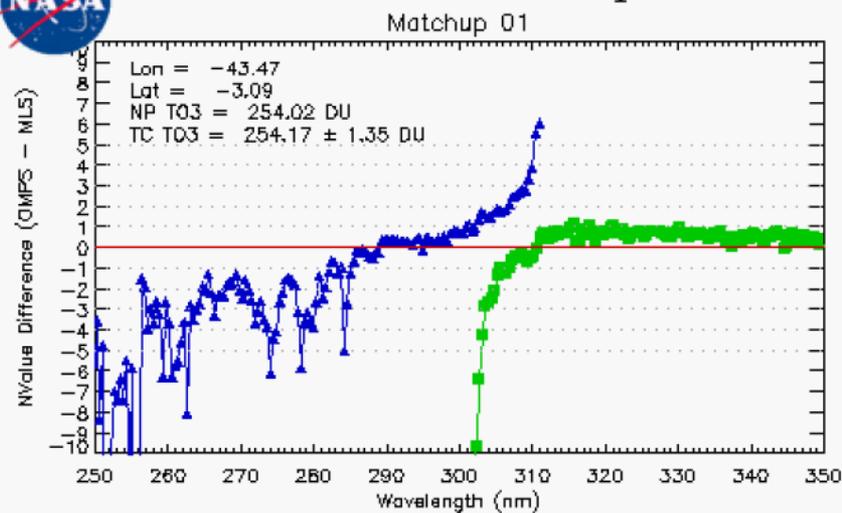

Comparison of radiance/irradiance ratios from OMPS with forward model calculations using EOS Aura Microwave Limb Sounder ozone profile retrievals as input. The **Blue points** are differences in N-value (1 N-value Unit  $\sim$  2.3%) for the OMPS Nadir Profiler measurements with the MLS predicted values and the **Green points** are the differences for measurements averaged over the near-Nadir FOVs for the OMPS Nadir Mapper with the MLS predicted values.

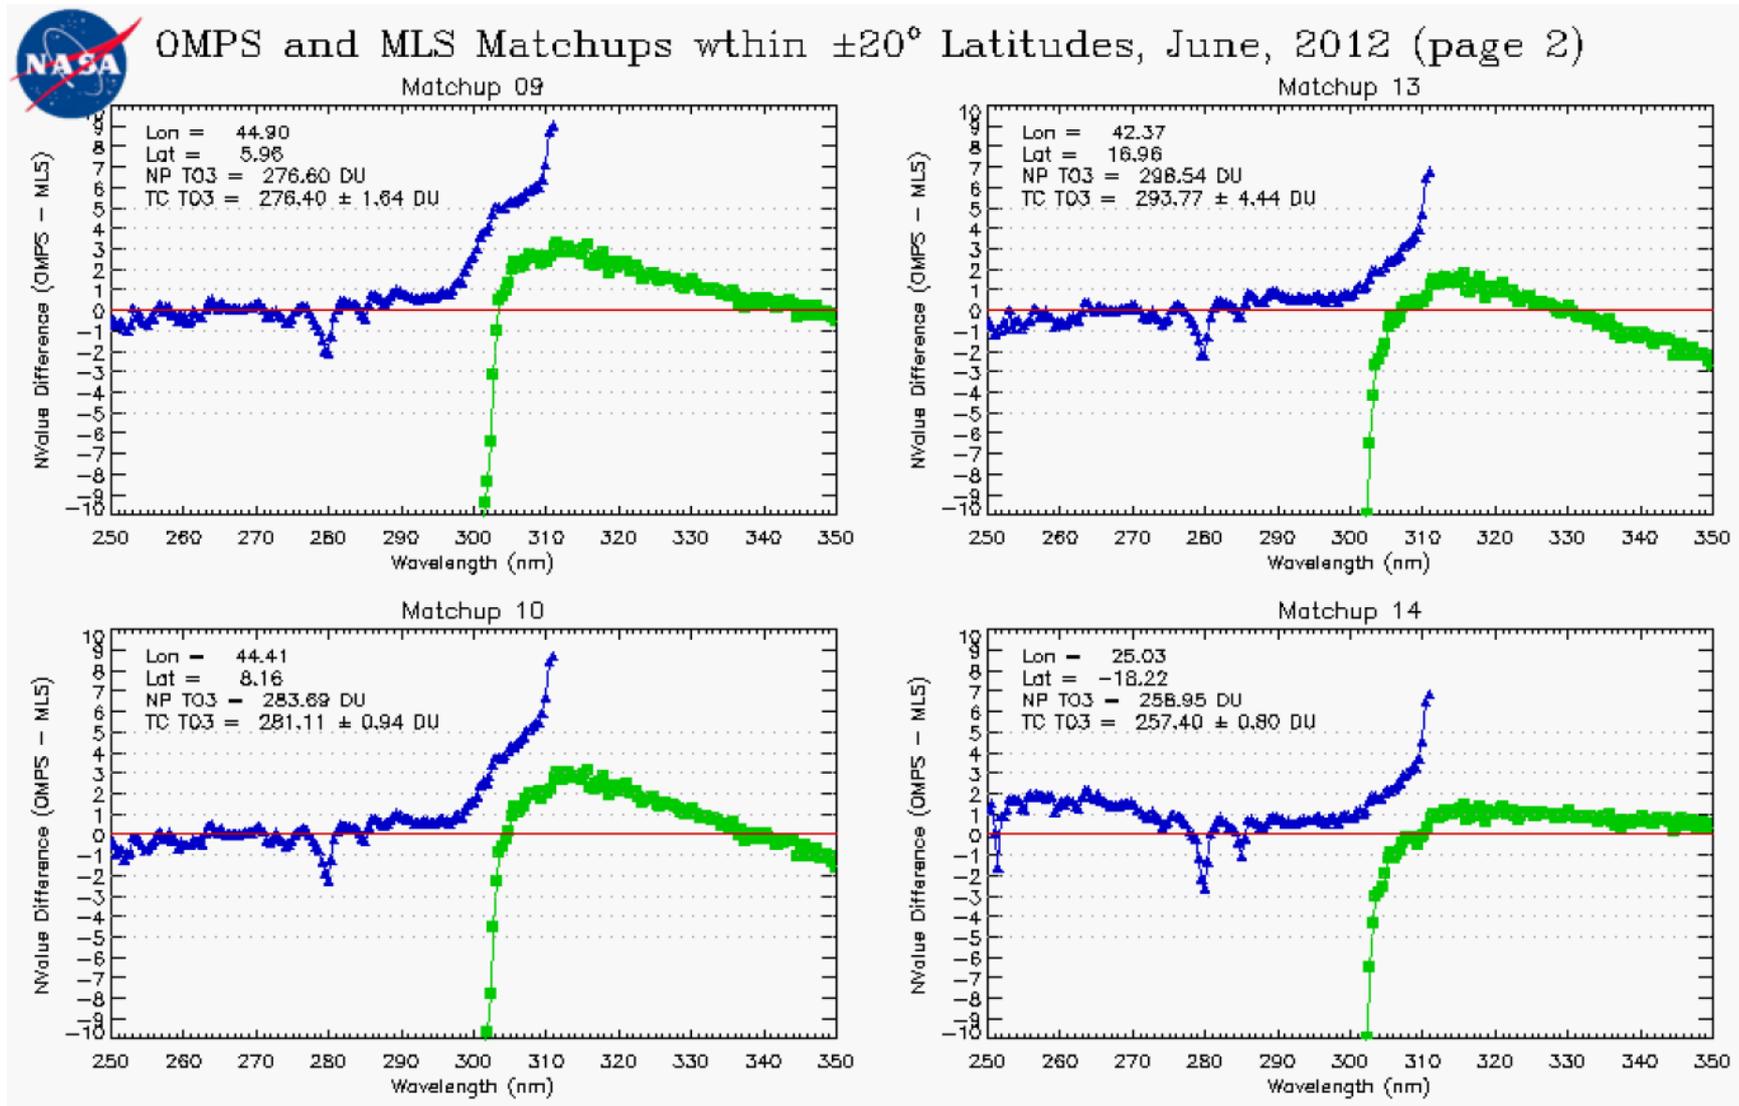



# IMOPPO Known Product Deficiencies


- Day One Solar needs a definitive spectrum. (Preliminary update implemented in August 2012 – DR #4797, #CCR 0458<sup>^</sup>)
- Profile and total ozone error flags are switched in the output. (Parent PCR 27740 – Expected correction early 2013 in Mx7.0)
- Snow/Ice data is all zeroes (DR #4802)
- The input-out-of-bound flag (Error Code 20) is set with an incorrect check on surface pressure (DR #4860, CCR 595 expected Mx6.6 2/2013)
- Stray Light / Radiance Coefficients<sup>^</sup>
  - Correction subroutine and definitive estimates of coefficients are under development (DR #4823). Adjustments could be entered through CF Earth.
- Dark Tables weekly updates will begin 2/2013 (DRs #4749, #4818)
- Wavelength Scale and adjustments<sup>^</sup>
  - Working on definitive Day 1
  - Working on adjustments for intra-orbit scale drift

<sup>^</sup> These may create large discontinuities in the product performance as they and similar changes enter the system.

# IMOPO Summary of Findings & Recommendations

- Promotion to Provisional
  - The IMOPO algorithm is functioning correctly. The product precision and accuracy are affected by the current state of the calibration, stray light correction, and wavelength scale. These will continue to change as improved characterizations are brought into the system.
  - The OMPS Team recommends that the IMOPO Product be promoted to Provisional Maturity.
- Monitoring Figures are available at [http://www.star.nesdis.noaa.gov/icvs/PROD/proOMPSbeta.O3PRO\\_IMOPO.php](http://www.star.nesdis.noaa.gov/icvs/PROD/proOMPSbeta.O3PRO_IMOPO.php)
- Upgrade to V8TOZ
  - The team recommends an upgrade of the current Version 6 ozone profile retrieval algorithm to the V8Pro algorithm in use with the SBUV/2 measurements for both climate data records and operational products. (This is captured in the JPSS system under DR #4256.)

# Backup

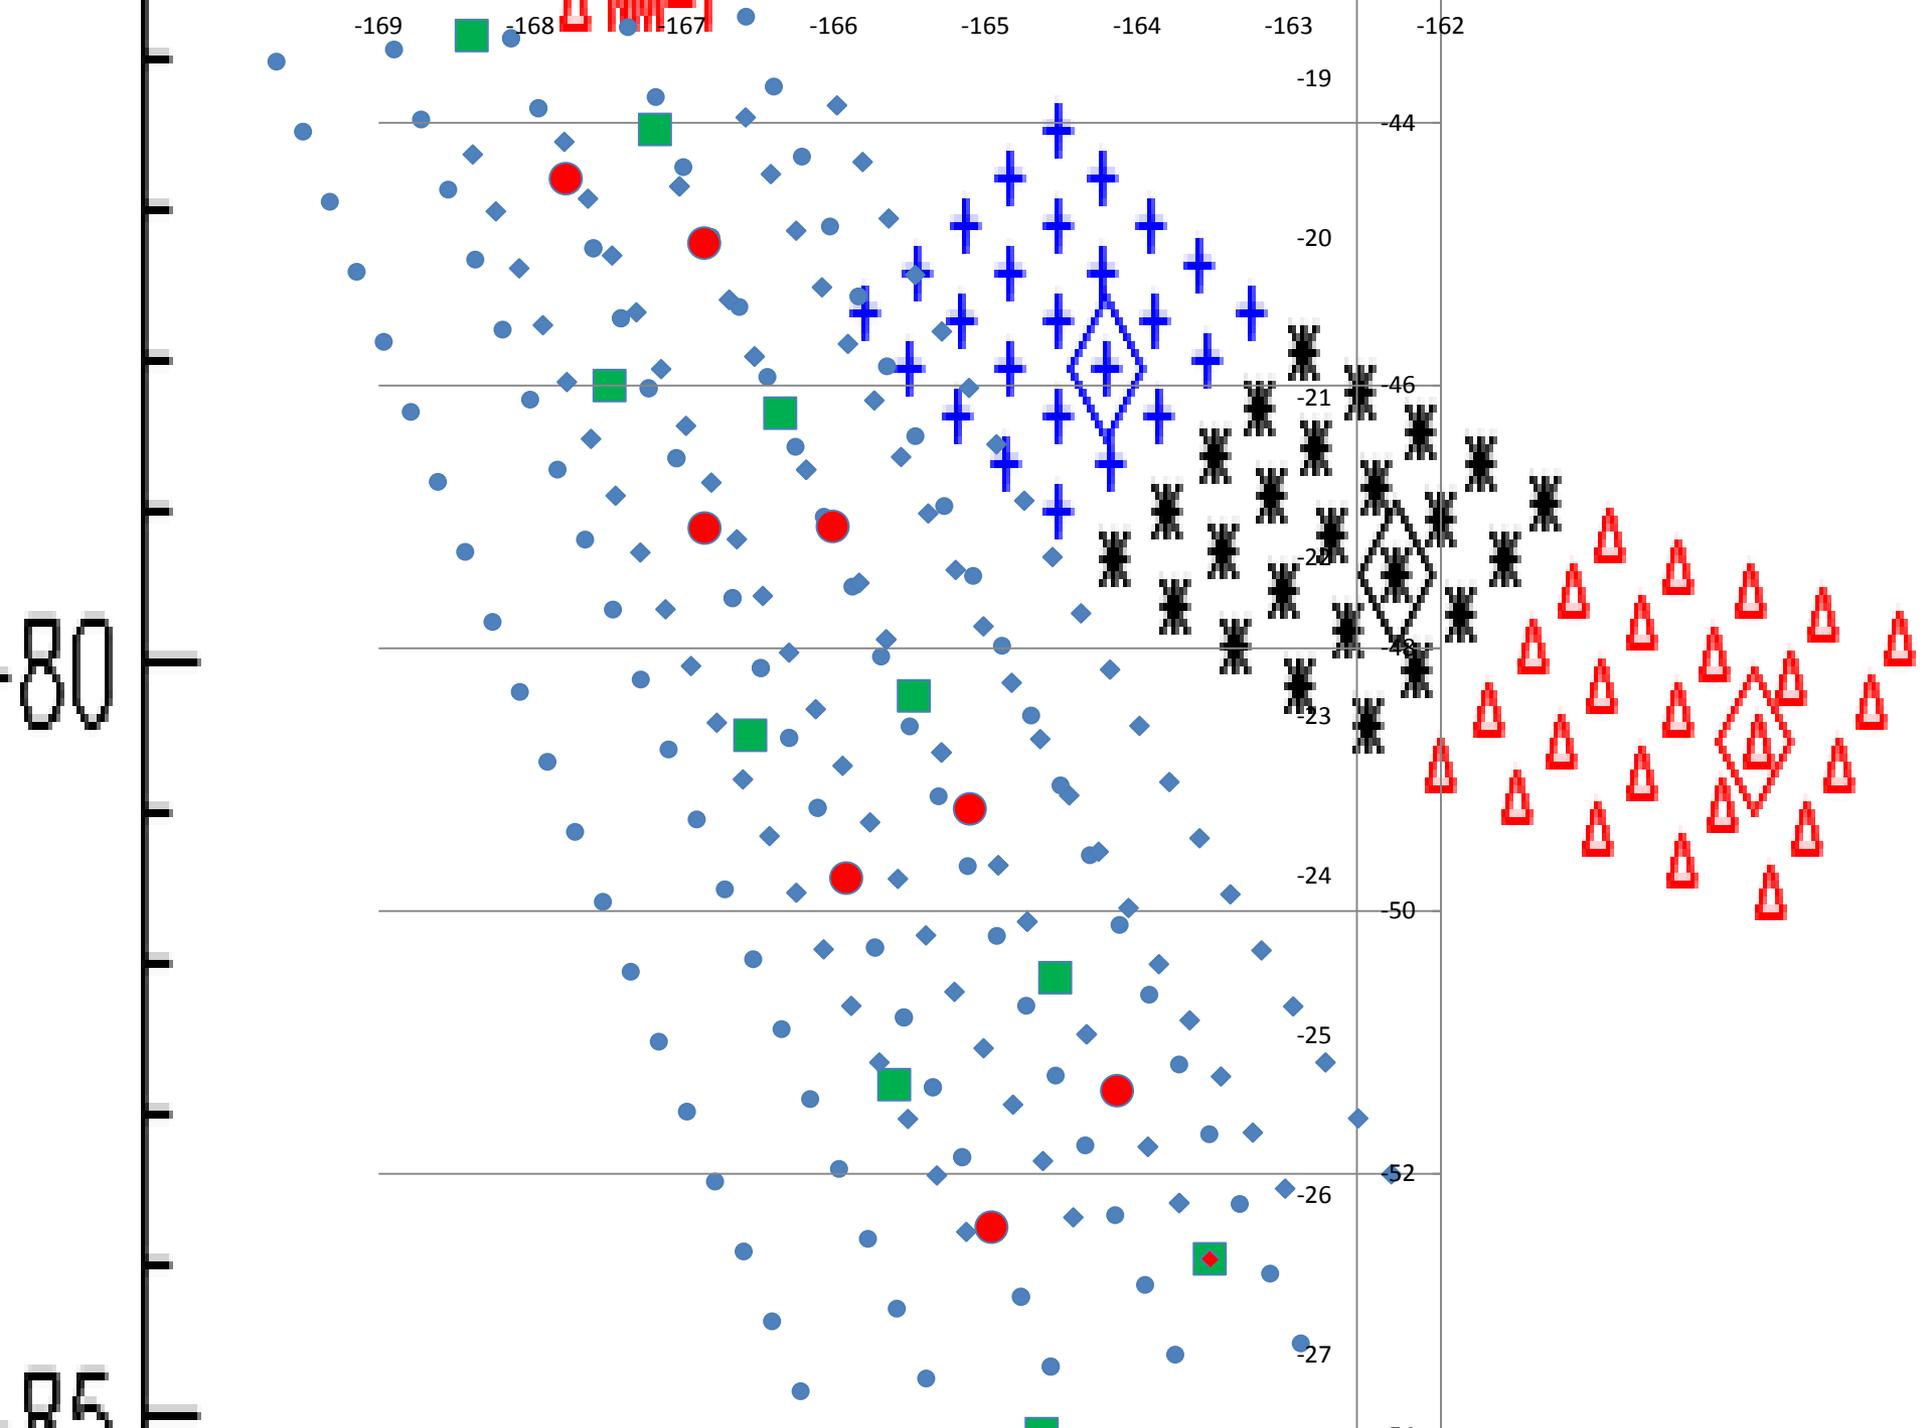

**Table 2.1.4 - Ozone Nadir Profile**


Attribute	Threshold (1)	Objective
a. Horizontal Cell Size	250 X 250 km (2,9)	50 x 50 km <sup>2</sup> (10)
b. Vertical Cell Size	5 km reporting	
1. Below 30 hPa (~ < 25 km)	10 - 20 km (3)	3 km (0 - Th)
2. 30 - 1 hPa (~ 25 - 50 km)	7 - 10 km (3)	1 km (TH - 25 km)
3. Above 1 hPa (~ > 50 km)	10 - 20 km (3)	3 km (25 - 60 km)
c. Mapping Uncertainty, 1 Sigma (4)	< 25 km	5 km (10)
d. Measurement Range		
Nadir Profile, 0 - 60 km	0.1-15 ppmv	0.01 - 3 ppmv (O - TH) 0.1-15 ppmv (Th - 60 km)
e. Measurement Precision (5)		
1. Below 30 hPa (~ < 25 km)	Greater of 20 % or 0.1 ppmv	10% (0 - TH)
2. At 30 hPa (~ 25 km)	Greater of 10 % or 0.1 ppmv	3%
3. 30 - 1 hPa (~ 25 - 50 km)	5% - 10%	1%
4. Above 1 hPa (~ > 50 km)	Greater of 10% or 0.1 ppmv	3%
f. Measurement Accuracy (5)		
1. Below 30 hPa (~ < 25 km)	Greater of 10 % or 0.1 ppmv	10% (0 - 15 km)
2. 30 - 1 hPa (~ 25 - 50 km)	5% - 10%	5% (15 - 60 km)
3. At 1 hPa (~ 50 km)	Greater of 10 % or 0.1 ppmv	5% (15 - 60 km)
4. Above 1 hPa (~ > 50 km)	Greater of 10 % or 0.1 ppmv	5% (15 - 60 km)
g. Latency	120 min. (6)	15 min
h. Refresh	At least 60% coverage of the globe every 7 days (monthly average) (7)	24 hrs. (7)
i. Long-term Stability (8)	2% over 7 years	1% over 7 years
		v 1.4.2, 7/29/11

**Notes:**

- The OMPS Limb Profiler instrument was not manifested on NPOESS. Thus, the Ozone Nadir Profile "Threshold" attributes are based upon current estimates using a variant of the SBUV/2 Version 8 algorithm with the Intermediate Product produced by the OMPS Nadir Profiler instrument. (See Note 10.) All of the Ozone Nadir Profile Threshold attributes are "TBR" until further analysis has been completed to determine the specifics of delivering the Ozone Nadir Profile EDR attributes using only the capability provided by this Intermediate Product.
- The SBUV/2 has a 180 km X 180 km cross-track by along-track FOV. It makes its 12 measurements over 24 Samples (160 km of along-track motion). It is intended to operate the OMPS Nadir Profiler in a mode with this large FOV sub-sampled.
- The SBUV/2 Version 8 Averaging kernels' Full Width Half Maximum values were used to define these VCS.
- The IORD-II Mapping "Accuracy" of 25 km was changed to "Uncertainty, 1 sigma" in accordance with user desires as expressed by the OATS and JARG.
- Values provided by L. Flynn of NOAA/NESDIS along with the two point values from BATC analysis.
- Relaxed IORD-II Threshold requirement.
- All OMPS measurements require sunlight, so there is no coverage in polar night areas. The IORD-II included threshold and objective Refresh requirements of 24 hrs for Ozone TC but none for Nadir Profile. This interpretation of the IORD-II Refresh requirement is consistent with the baseline OMPS Cross-track Swath Width design of ~ 250 km (16.7° FOV) for a single orbit plane. This swath width provides a good sample of the full global ozone profile pattern over ~ 7 days. A set of 4 days with 14 orbits/day by 250-km swaths will cover a little over one third of the 40,000 km equator. SBUV/2 has similar coverage over 5 days. The OMPS Nadir Profiler performance is expected to degrade in the area of the South Atlantic Anomaly (SAA) due to the impact of periodic charged particle effects in this region.
- Long Term Stability is not a critical attribute for achieving operational performance but it is for climate applications.
- The OMPS and other newer CCD array BUUV instruments can be operated to generate products with higher spatial resolution. Numerical weather and air quality models can make good use of this information.
- The IORD Total Column/Profile EDR had 25 km Mapping Accuracy for both the Threshold and Objective. The Nadir Profile Objective has been changed to 5 km for the following reasons per L. Flynn. The OMPS aggregates pixels to make the current 250X250 FOV in the threshold. We would aggregate 1/5 as many pixels to make the new objective 50X50 FOV. The requested change maintains

# Outline (BU on SDR)

- Irradiance Validation
  - Solar diffuser measurements
- Radiance Validation
  - Signal-to-Noise
  - South Atlantic Anomaly – charged particle effects
  - Stray Light
  - Wavelength Scale
  - Shift in May
- Radiance/Irradiance Validation
- SDR Status

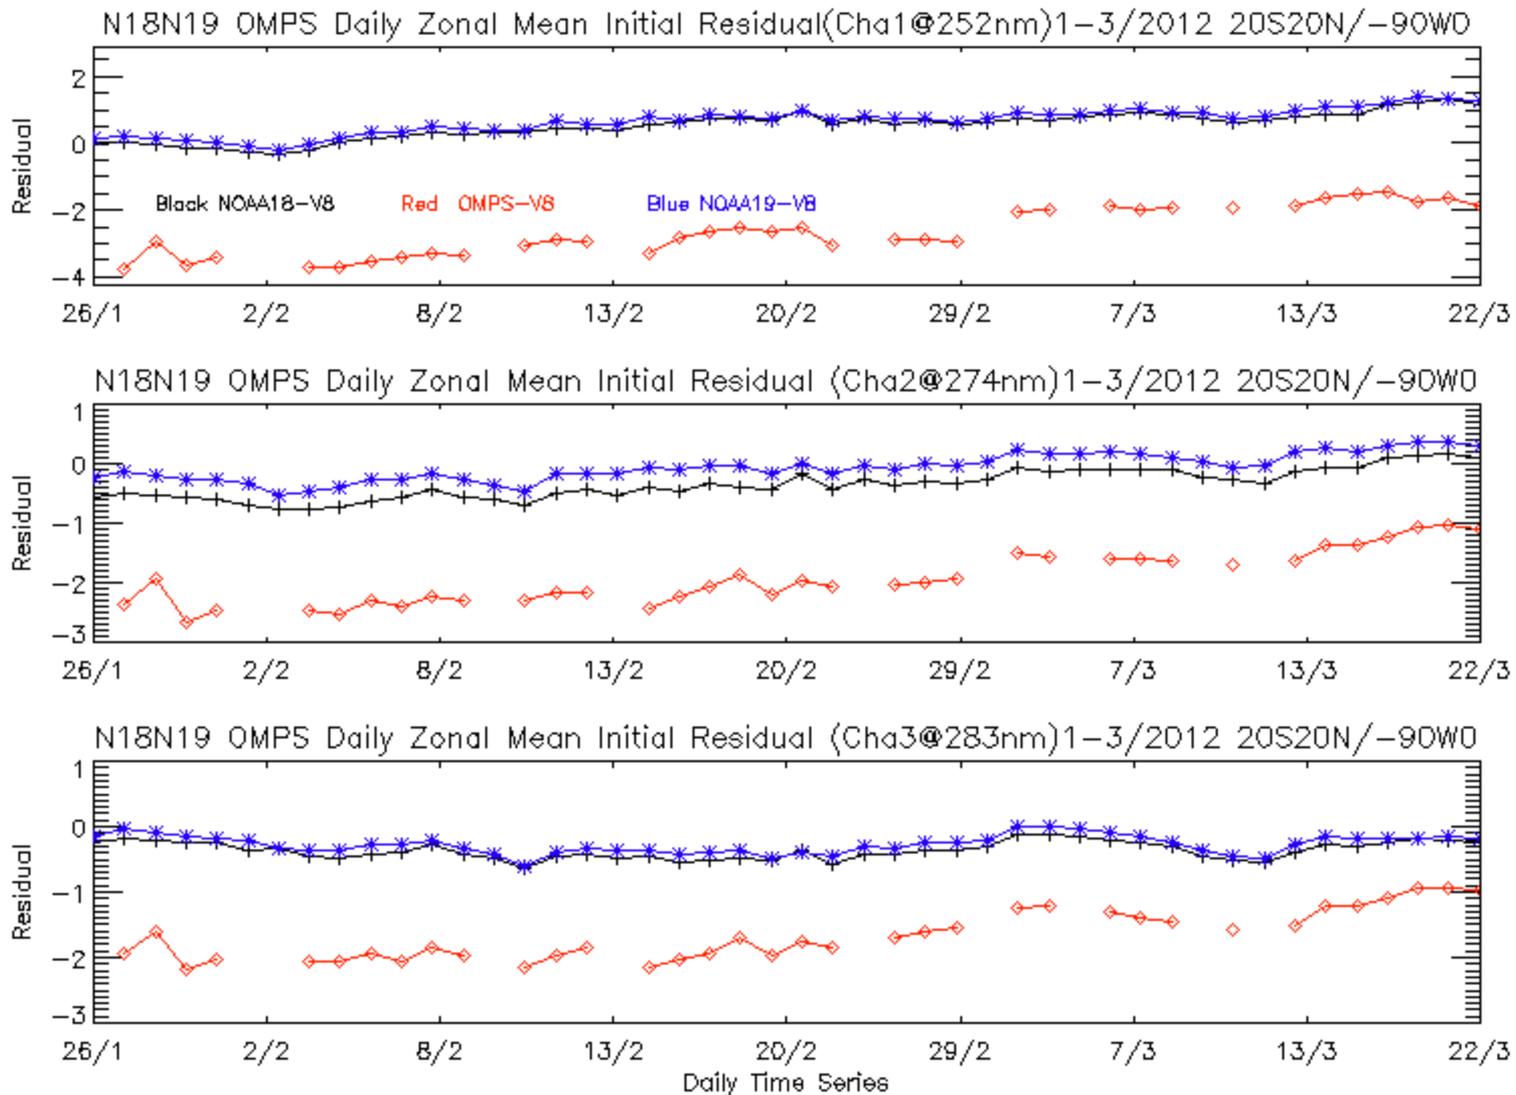

Daily zonal means for 20°S to 20°N (avoiding SAA effects by excluding longitudes from 0 to 90 West) for initial measurement residuals for the three shortest wavelengths (252, 274 and 283 nm) from the operational NOAA-18 (BLACK) & 19 (BLUE) SBUV/2 and the STAR NPP OMPS NP (RED) Version 8 ozone profile retrieval algorithm for February and March of 2012. The OMPS values are offset due to the use of a preliminary solar calibration and the lack of stray light corrections.

# OMPS Nadir Profiler Status

- IDPS is processing OMPS Nadir Profiler and Nadir Mapper Measurements with the Version 6 SBUV(/2) algorithm (IMOPO)
  - A Beta maturity level findings meeting is planned for later this month for the IMOPO product
- NOAA STAR is processing the data with the Version 8 SBUV/2 algorithm
- A new Day One solar file will be implemented in IDPS by Mx7 at the latest
- We are working on a Stray Light correction

# Additional Information on OMPS


- Near term work on the total ozone products includes:
  - Evaluation of reflectivity and aerosol index products
  - Evaluation of cross track consistency
  - Modeling of along orbit wavelength scale variations
- Daily Maps of the OMPS INCTO and V8TOZ are available to Science Team Members at

<http://www.star.nesdis.noaa.gov/smcd/spb/icvs/proComparison.php>

- Near term work on the ozone profile products includes:
  - Comparison of profiles and initial residuals to SBUV/2
  - Modeling of stray light for the Nadir Profiler channels
- Information on IMOPO and V8PRO will be made available soon at

<http://www.star.nesdis.noaa.gov/smcd/spb/icvs/proSBUV2operational.php>

# Background Slides

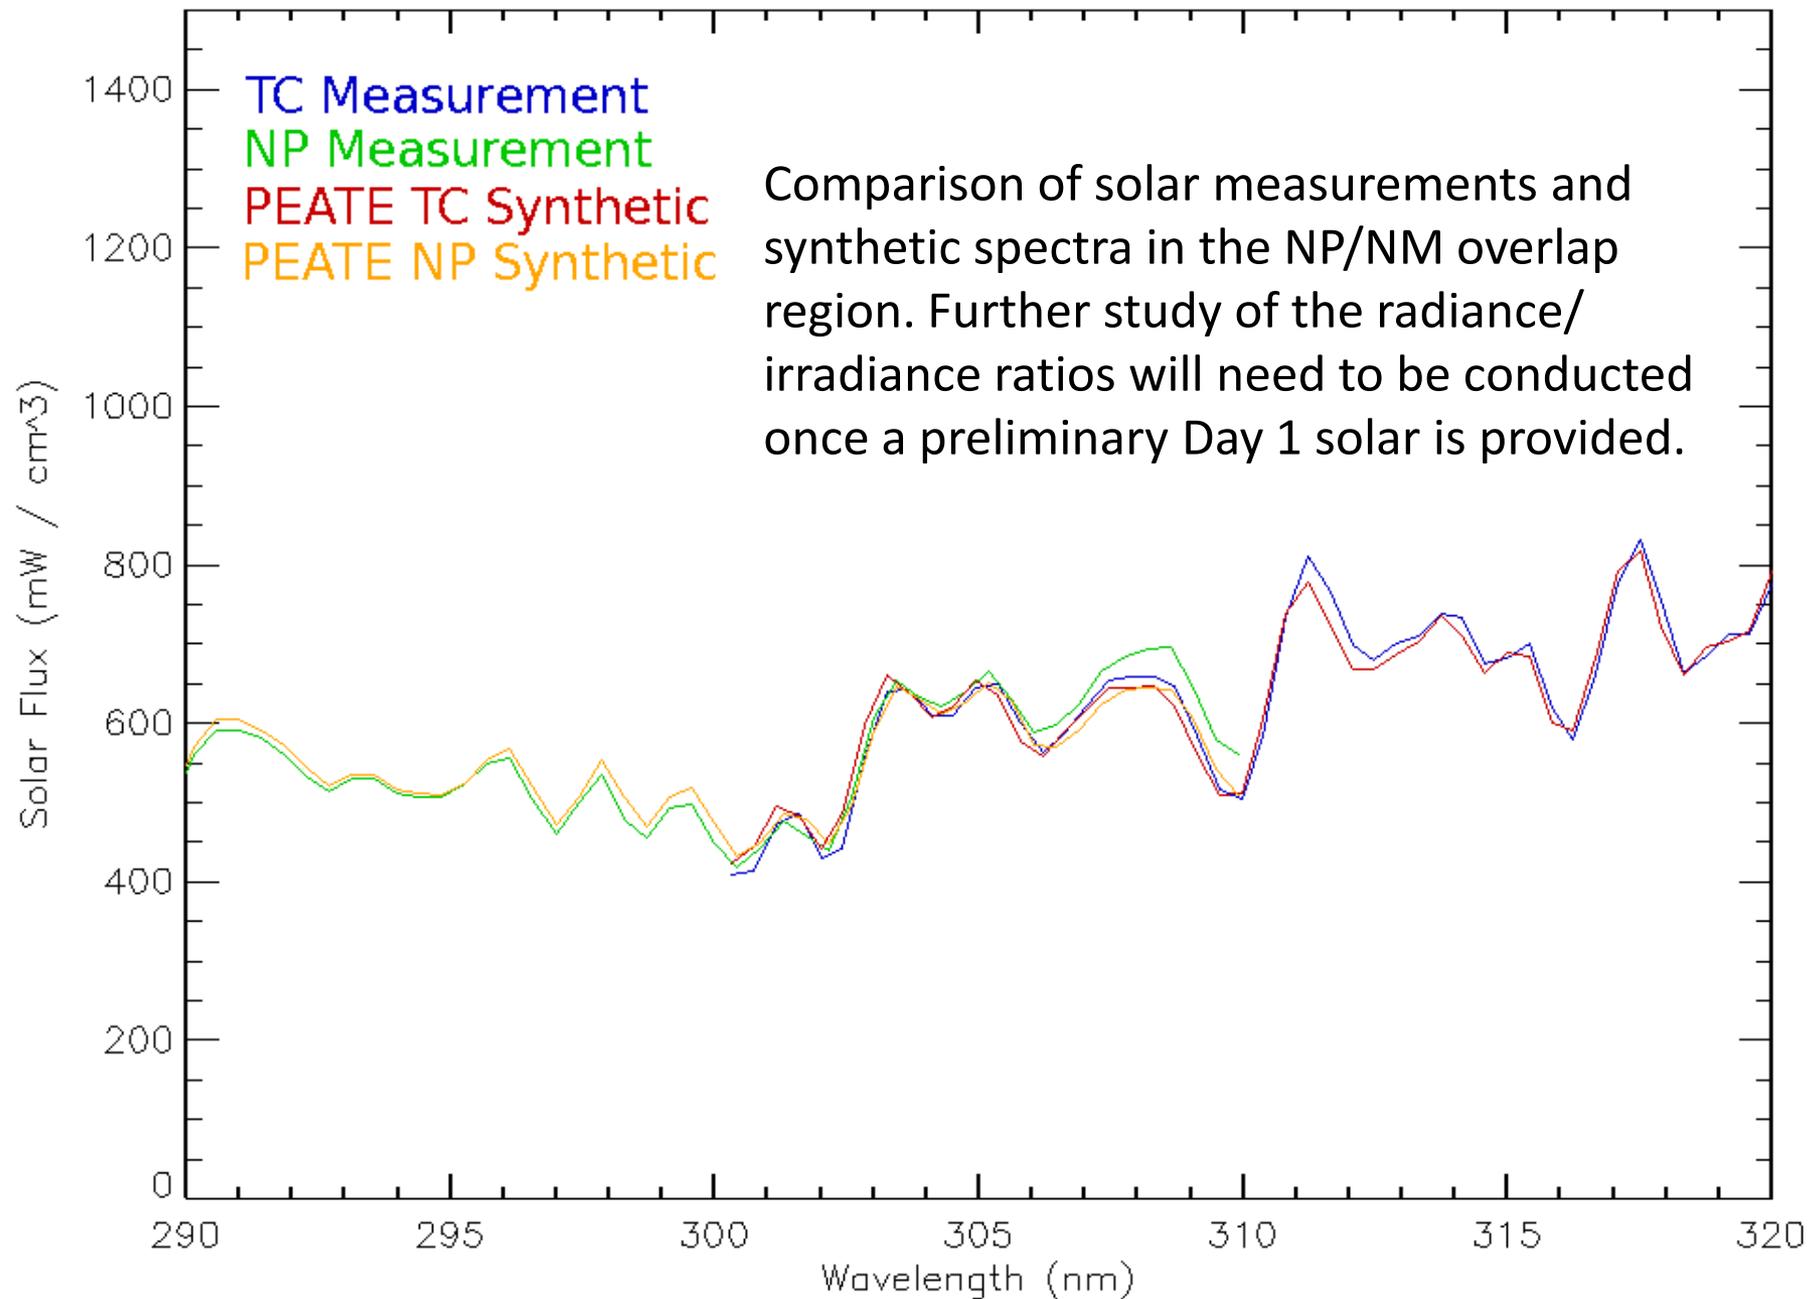

# OMPS Earth View SDR Status (1)

- Dark Current levels and the increase in Hot Pixels are consistent with prelaunch characterization and expectations.
- On-orbit Non-Linearity measurements match laboratory data very well.
- Solar Spectra is consistent with synthetic spectra from instrument bandpass convolved reference spectra.
- Preliminary analysis of Signal-to-Noise levels show performance above requirements.
- Stray Light is present in the Nadir Profiler spectra and will need a correction. Measurements were taken in the laboratory to provide these corrections.
- The Wavelength Scale shows small intra-orbit variations tracking the optical bench temperatures
- Charge particle effects in the South Atlantic Anomaly are apparent in the Nadir Profiler spectra in the expected region.
- Preliminary evaluation of the Geolocation Registration shows it well within specifications
- The CCD array Detector Temperatures are within allowable tolerance of the design values.

# OMPS Earth View SDR Status (2)


- A good amount of Earth-View SDR data has been obtained over the last month for both Nadir instruments.
- A minor code bug and a minor table bug have led to missing fields for scales and solar flux in the EV SDRs. The radiances are complete. This has prevented the creation of IPs and EDRs at IDPS since February 1. The issues will be resolved on March 1.
- In the meantime, the GRAVITE-ADA has begun reprocessing February data to provide the missing information (both SDRs and IPs).
- OMPS EV SDRs have been used successfully to generate total ozone and ozone profiles in offline processing (at the PEATE and STAR) with various flavors of the Version 8 Algorithms.
- The process to provide new and updated SDR Calibration tables to IDPS is now working well. Fast Track Tables have been identified and can be replaced with less bureaucratic overhead.
- Several DRs have been identified (both SDR and EDR related) and solutions are proceeding through the system.
- The teams are awaiting the introduction of measured day one solar into the products.
- Delivery and archiving of JPSS-Funded, PEATE-processed Calibration SDRs is an open concern.

# Summary new Bullets

- NP has stray light; a two term correction using radiances at 305 nm and at 298 nm is envisioned. The mean magnitude of these corrections will affect any radiance/irradiance validation.
- Pre-launch solar reference results for NM: NASA PEATE vs IDPS show  $\pm 4\%$  wavelength dependent offsets
- Increase in hot pixels as expected

# NP Stray Light Study via Correlation Matrix


Correlation of variations for NP

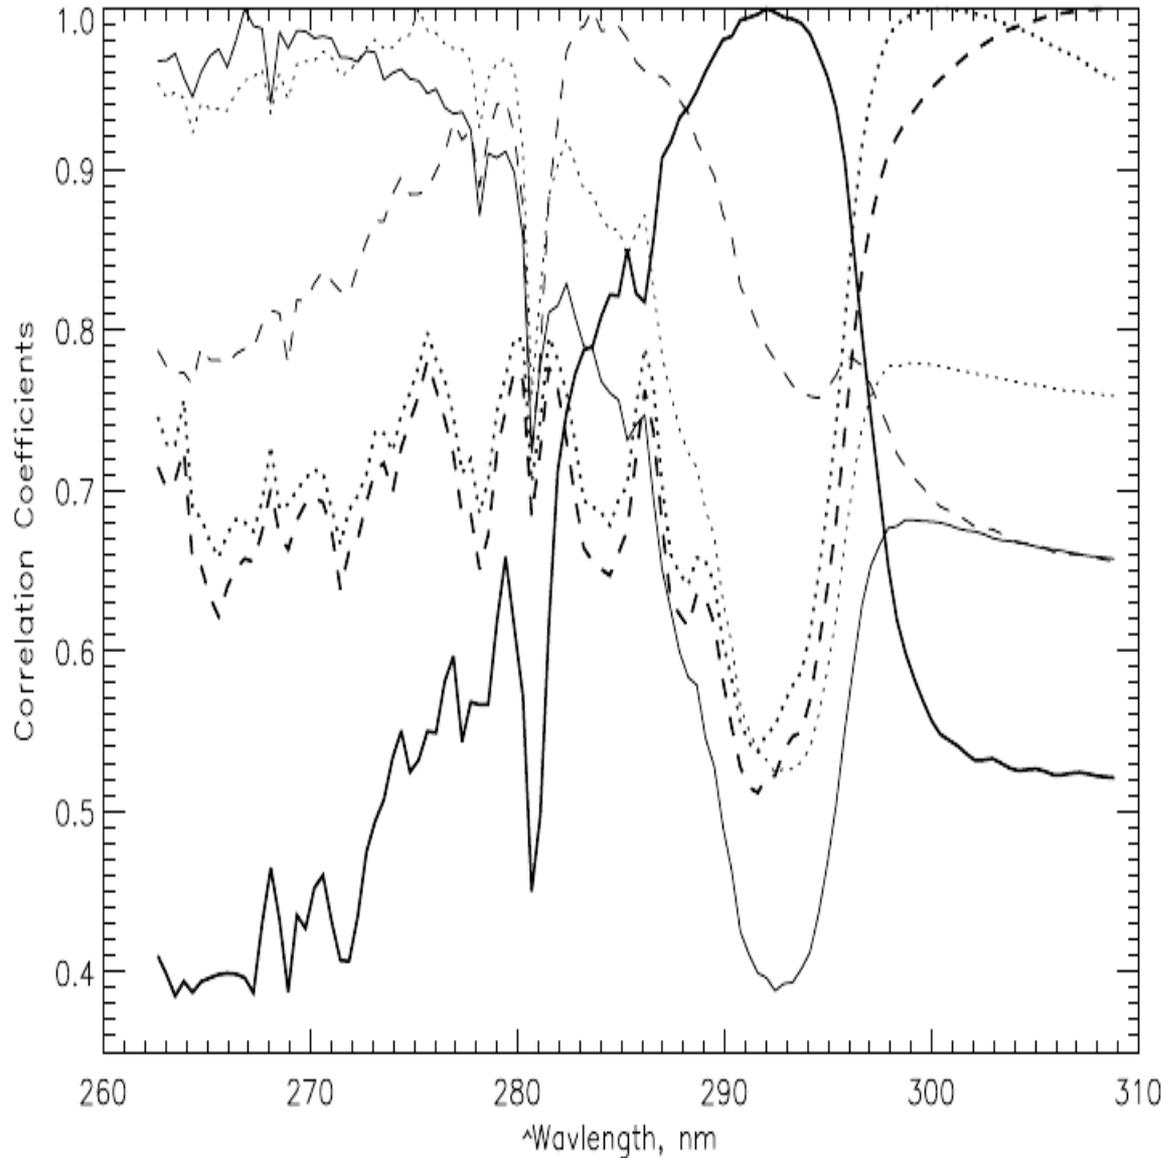



A smooth polynomial fit as a function of latitude was computed for each wavelength using three orbits of NP spectra. The correlation matrix was computed for the differences between the measurements and these fits. The results for six wavelengths are presented to the left. The peaks at 1.0 identify the selected wavelengths. The high correlations between wavelengths below 290 nm with those above 300 nm is direct evidence of stray light. E.g., the thin dotted line for 275 nm drops off as expected until 292 nm where it rises back up due to stray light contamination. Over half of the variations at this wavelength could be explained by variations at a channel between 300 and 310 nm. Similar results hold for all channels below 287 nm.

# NP Stray Light Study with 300 nm Proxy

Stray light correction at 273 nm from 300 nm proxy

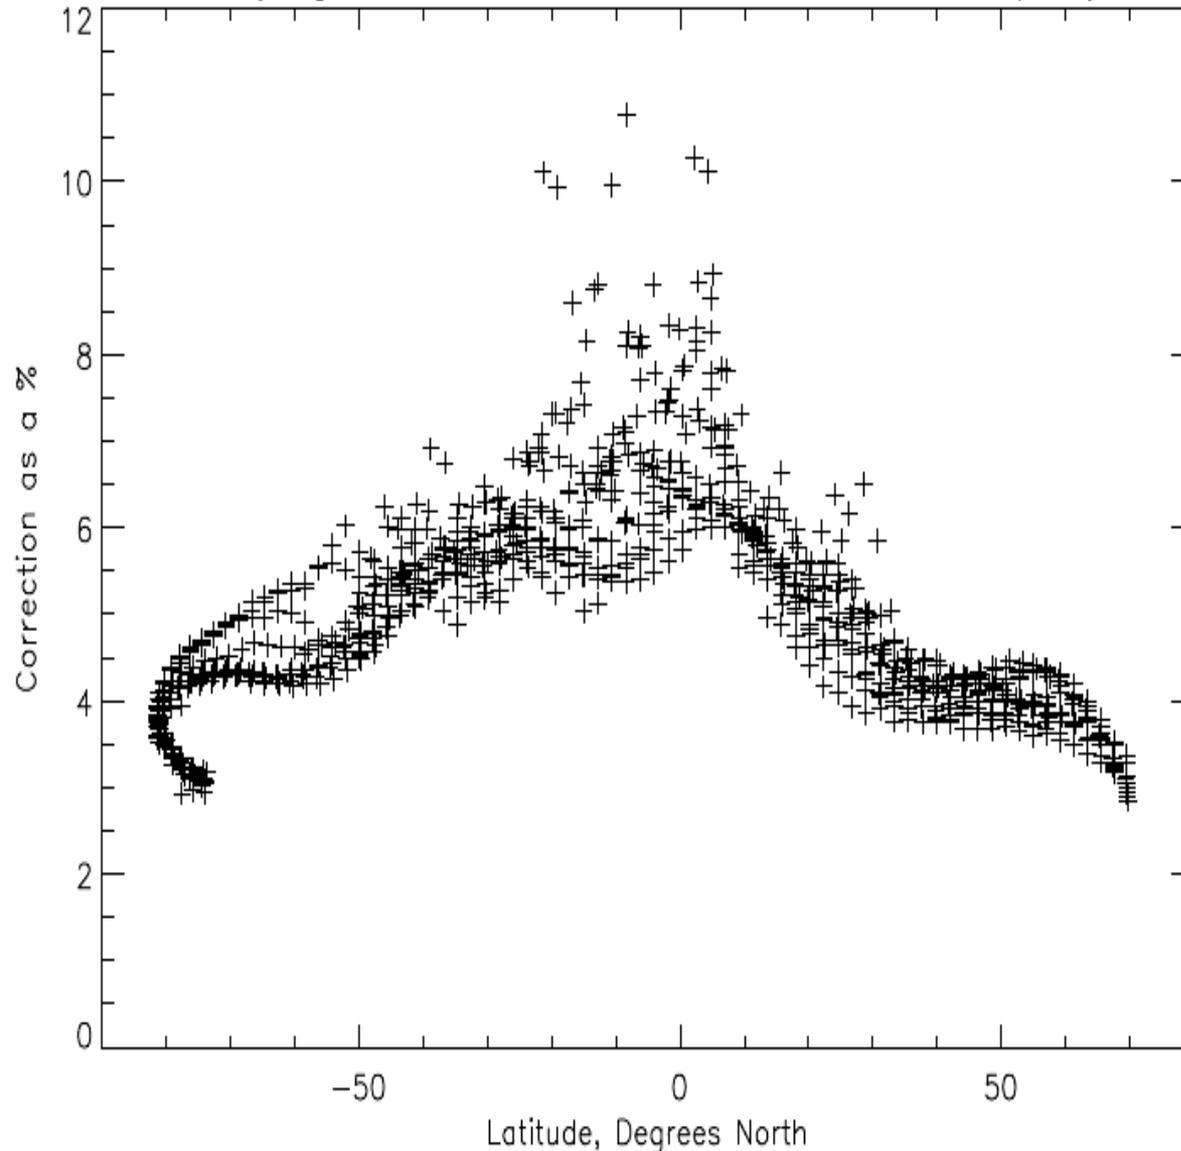


The single wavelength proxy model gives stray light ranging from 3% at high SZAs to 7% at low SZAs for the four shortest profiling wavelengths (253-288 nm) with additional variations when scene reflectivity variations are present in 300 nm. This signal contamination will complicate any attempts to find a Radiance/Irradiance adjustment. That is, we need to come up with a first-order stray light correction, before we try to adjust the NP calibration. Further investigation of the NP stray light in Earth View with a single wavelength proxy suggests that a weighted proxy may be needed. The relative weights can be provided by the BATC data.


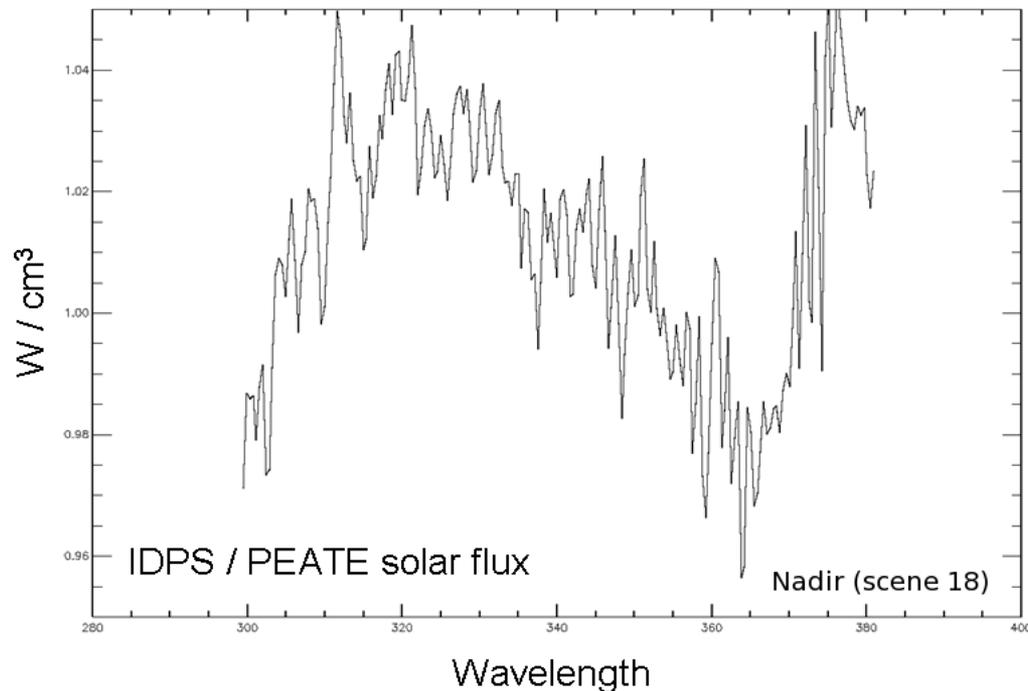
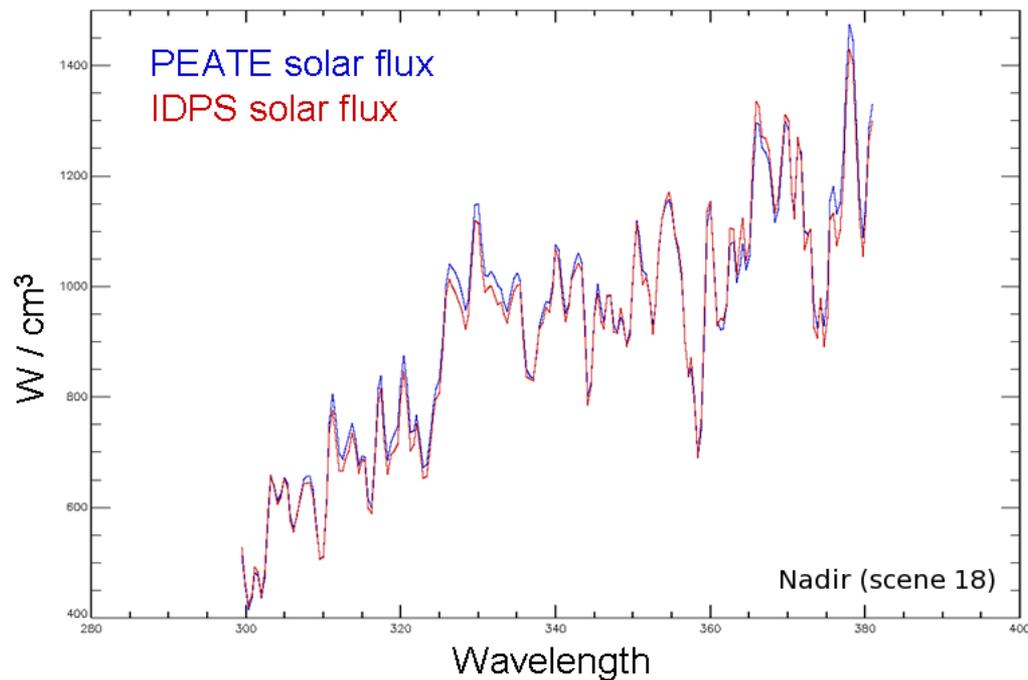


Comparisons of pre-launch solar flux. The plot on the top shows the solar flux from the IDPS IP versus the solar flux from the PEATE product for the nadir scene (IDPS position 18; for the PEATE a simple average of scenes 18 and 19). There is a definite, wavelength-dependent difference between the IDPS and PEATE solar flux values (that is surprisingly large). The PEATE product is made from a reference solar flux that has been convolved with the appropriate OMPS BPS and CBC data.

Comparison of solar and proxy at xtrack number 17

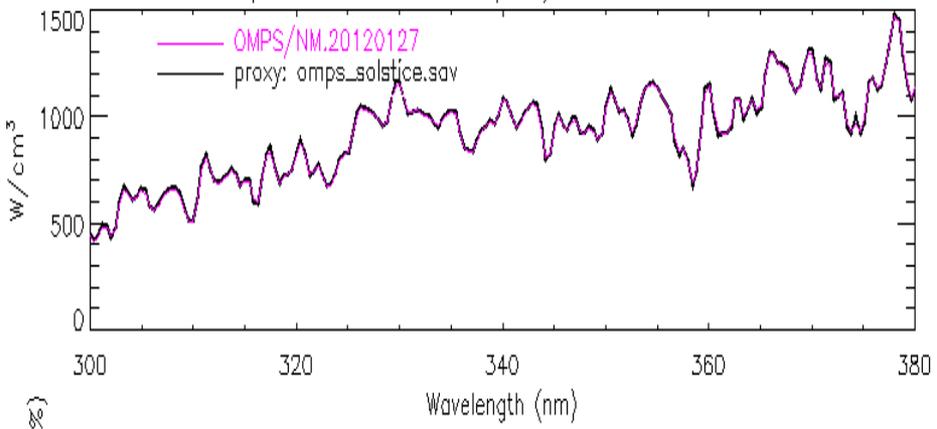

Comparison of PEATE prelaunch solar and solstice proxy at xtrack #17

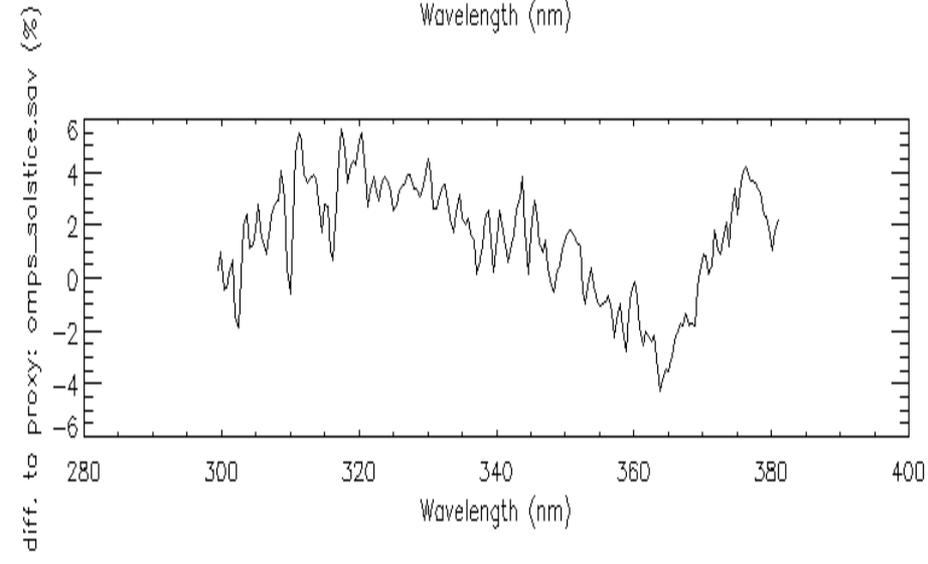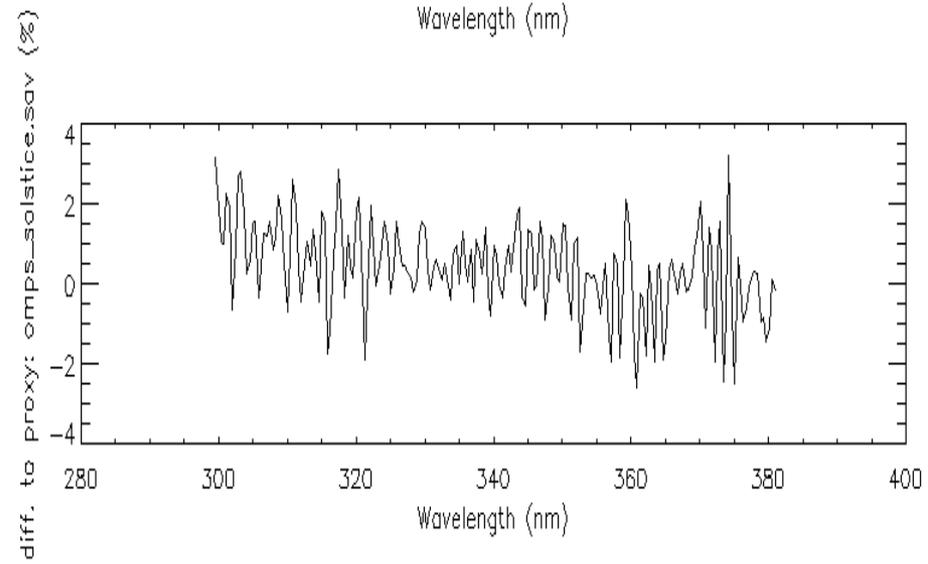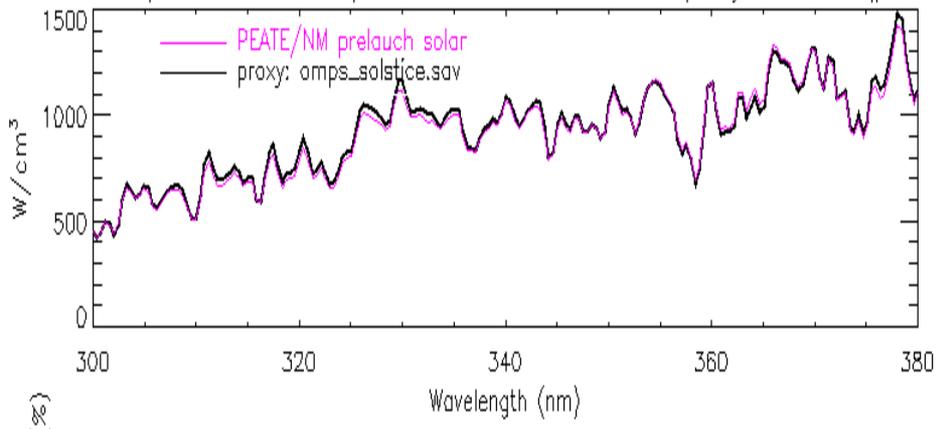


IDPS and Star Solstice proxy comparison are shown on the left. Differences are less than 3% and show high frequency features. The spectral scale have less than 0.01 nm differences in all 35 cross track position. The PEATE proxy comparisons to the STAR Solstice one are shown on the right. The differences range from  $\pm 5\%$ .

Figure: J. Niu, NOAA/STAR (ERT)

# Support Material for OMPS SDR to Beta Maturity Decision Performance compared to Pre-launch


Compilation of results from  
JPSS and NPP OMPS Teams

# Stray Light and SNR for OMPS NP

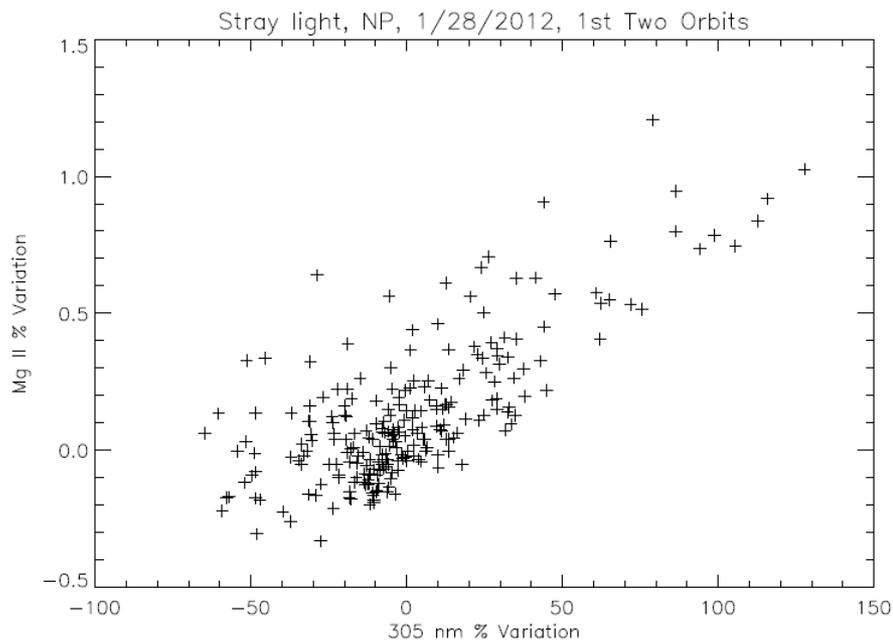

The scatter plot on the left compares simple three-wavelength Mg II core-to-wing ratio variations (280 nm to 277 and 282 nm) with longer wavelength variations at 305 nm. The core average is  $\sim 0.4$  of wings, so this  $-0.5\%$  to  $1.5\%$  variation represents  $(1.0/0.4 - 1 =) 1.5$  times the wing variations.


The RMSR estimates on the right were done on clean data for 230 spectra. A spectral screen detected and removed one value on average from each of the 120-wavelength spectra. The removal of the second EOF pattern was somewhat arbitrary as it and the third EOF may be stray light patterns. The EOF used a 6<sup>th</sup> order polynomial for normalization.

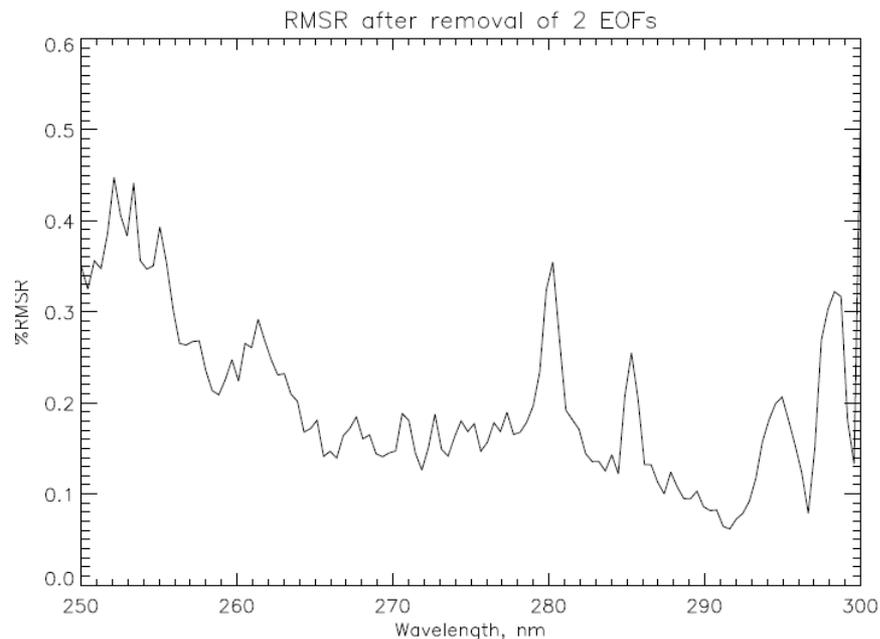




# EOF/SNR analysis for six orbits (~1800 scans) OMPS NM on 1/28/2012 using three wavelength ranges (305-325, 320-345, 340-380) for 35 CT



RMSR after removal of 6 EOFs

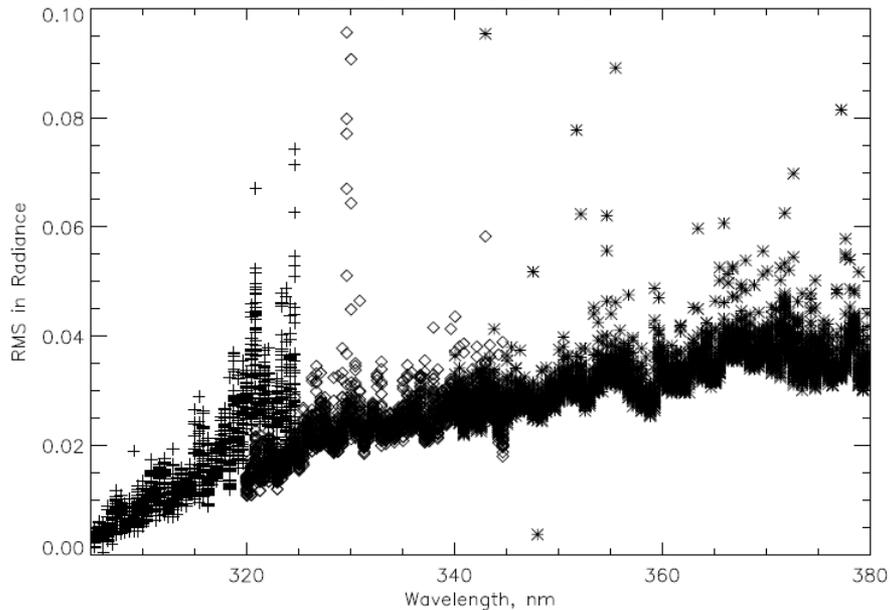





RMSR after removal of 6 EOFs

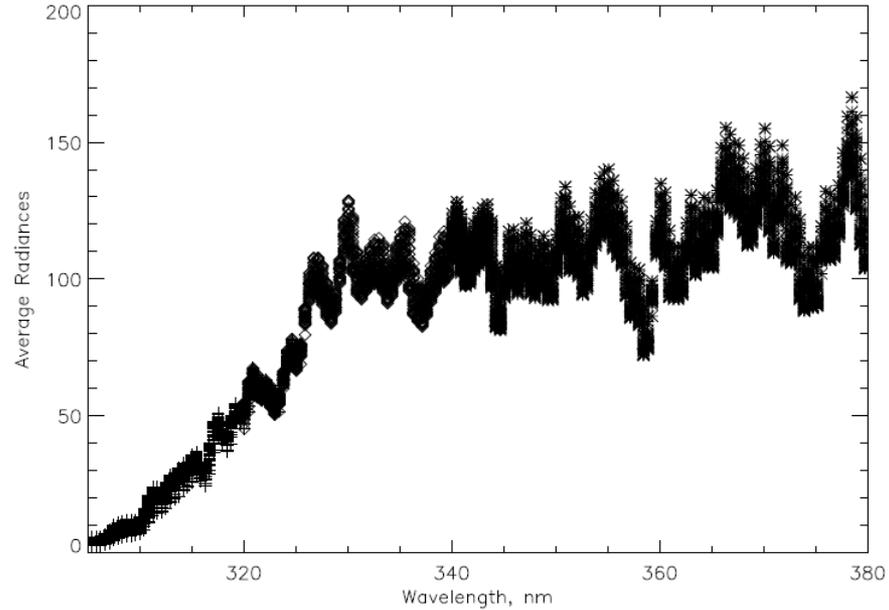

RMSR after removal of 6 EOFs

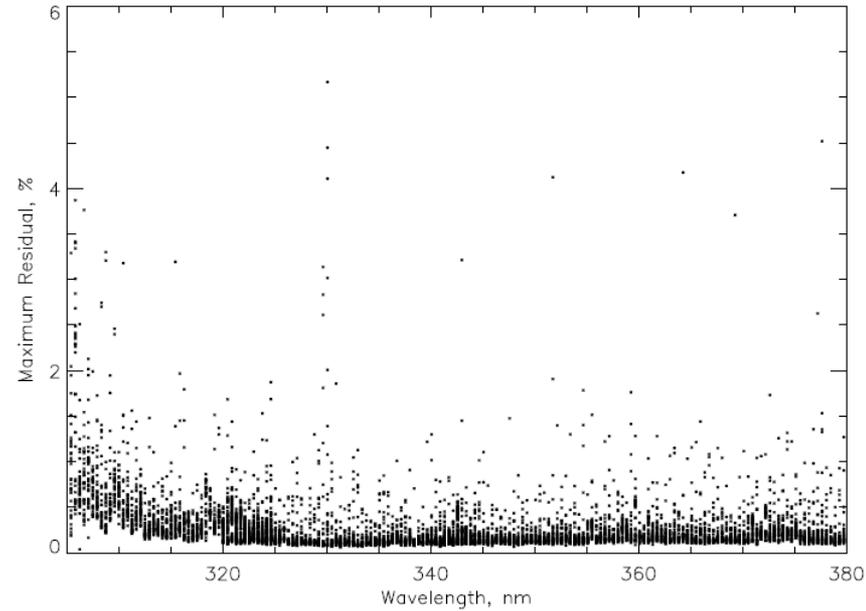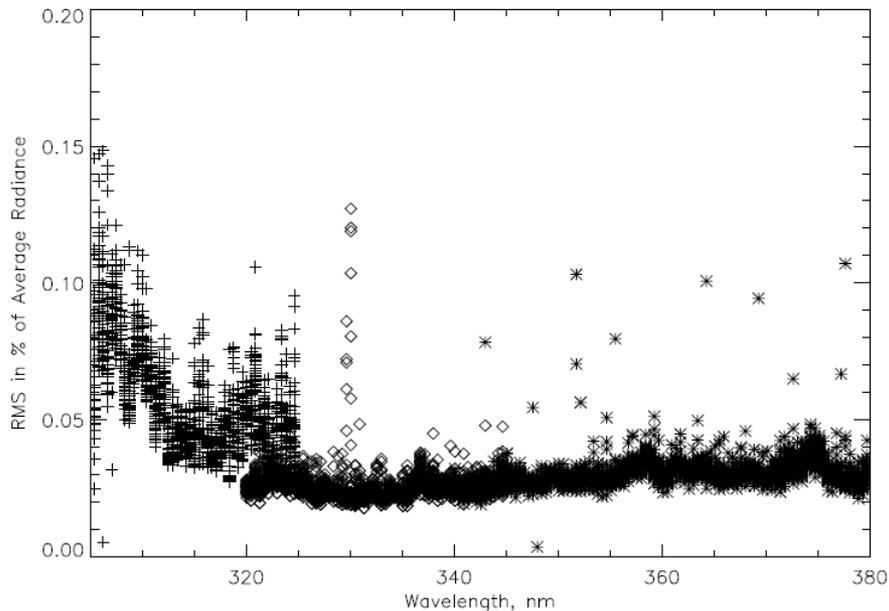


# Wavelength Shift and Ring Effect/Stray Light

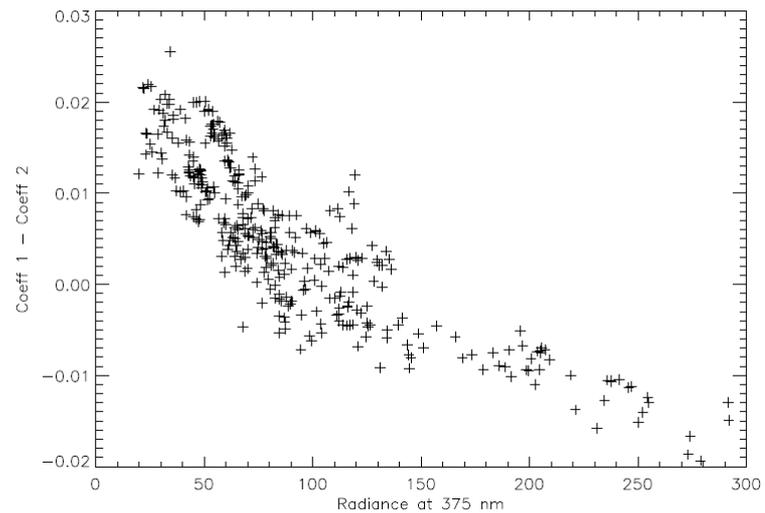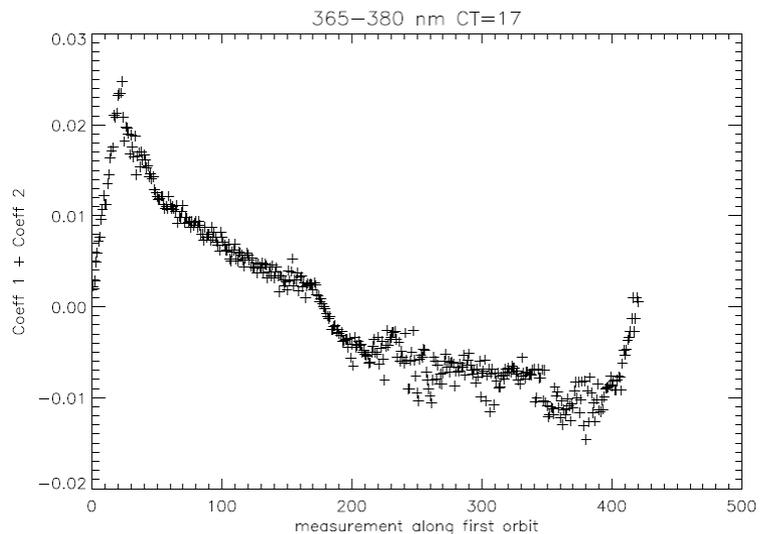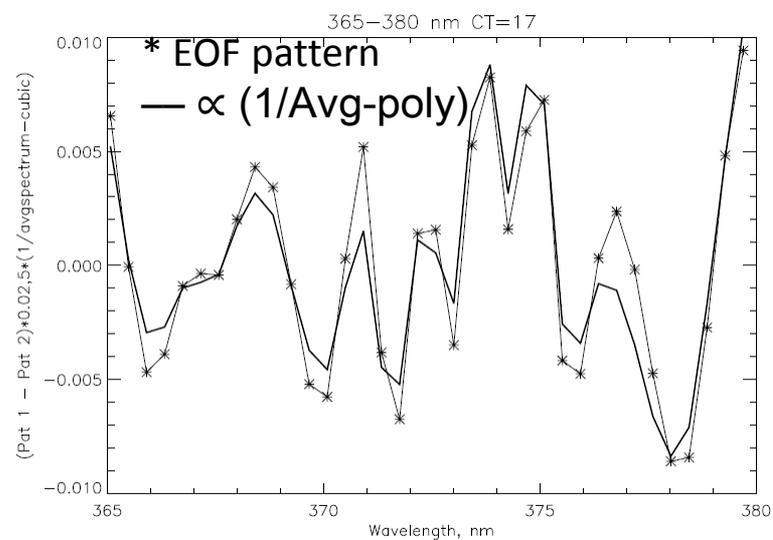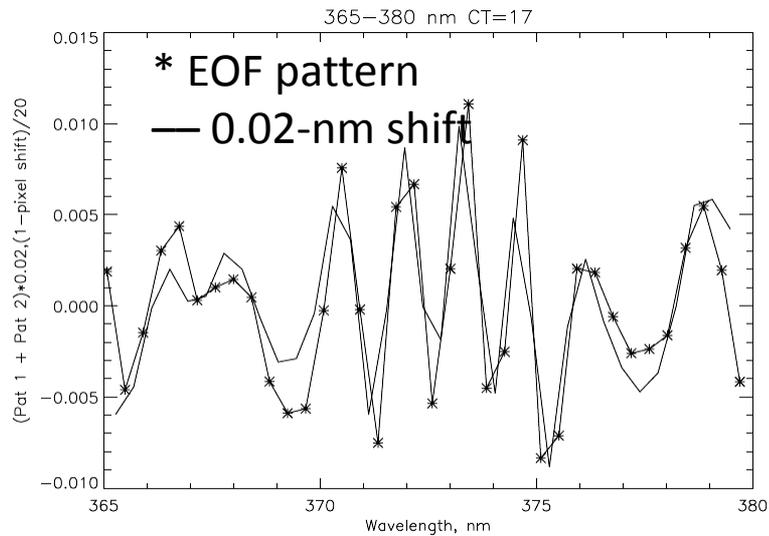

EOF analysis 365 to 380 nm for parts of six orbits on 1/28/2012. The first two patterns contain 90% of the variability after removing a 3<sup>rd</sup> order polynomial from Rad/AvgRad. They are combinations of a Wavelength Scale Shift and Ring Effect/Stray Light. Given the radiance levels, a 0.01 in the figures at the top equates to approximately 1% variation.

# OMPS Nadir Mapper and Nadir Profiler First Solar

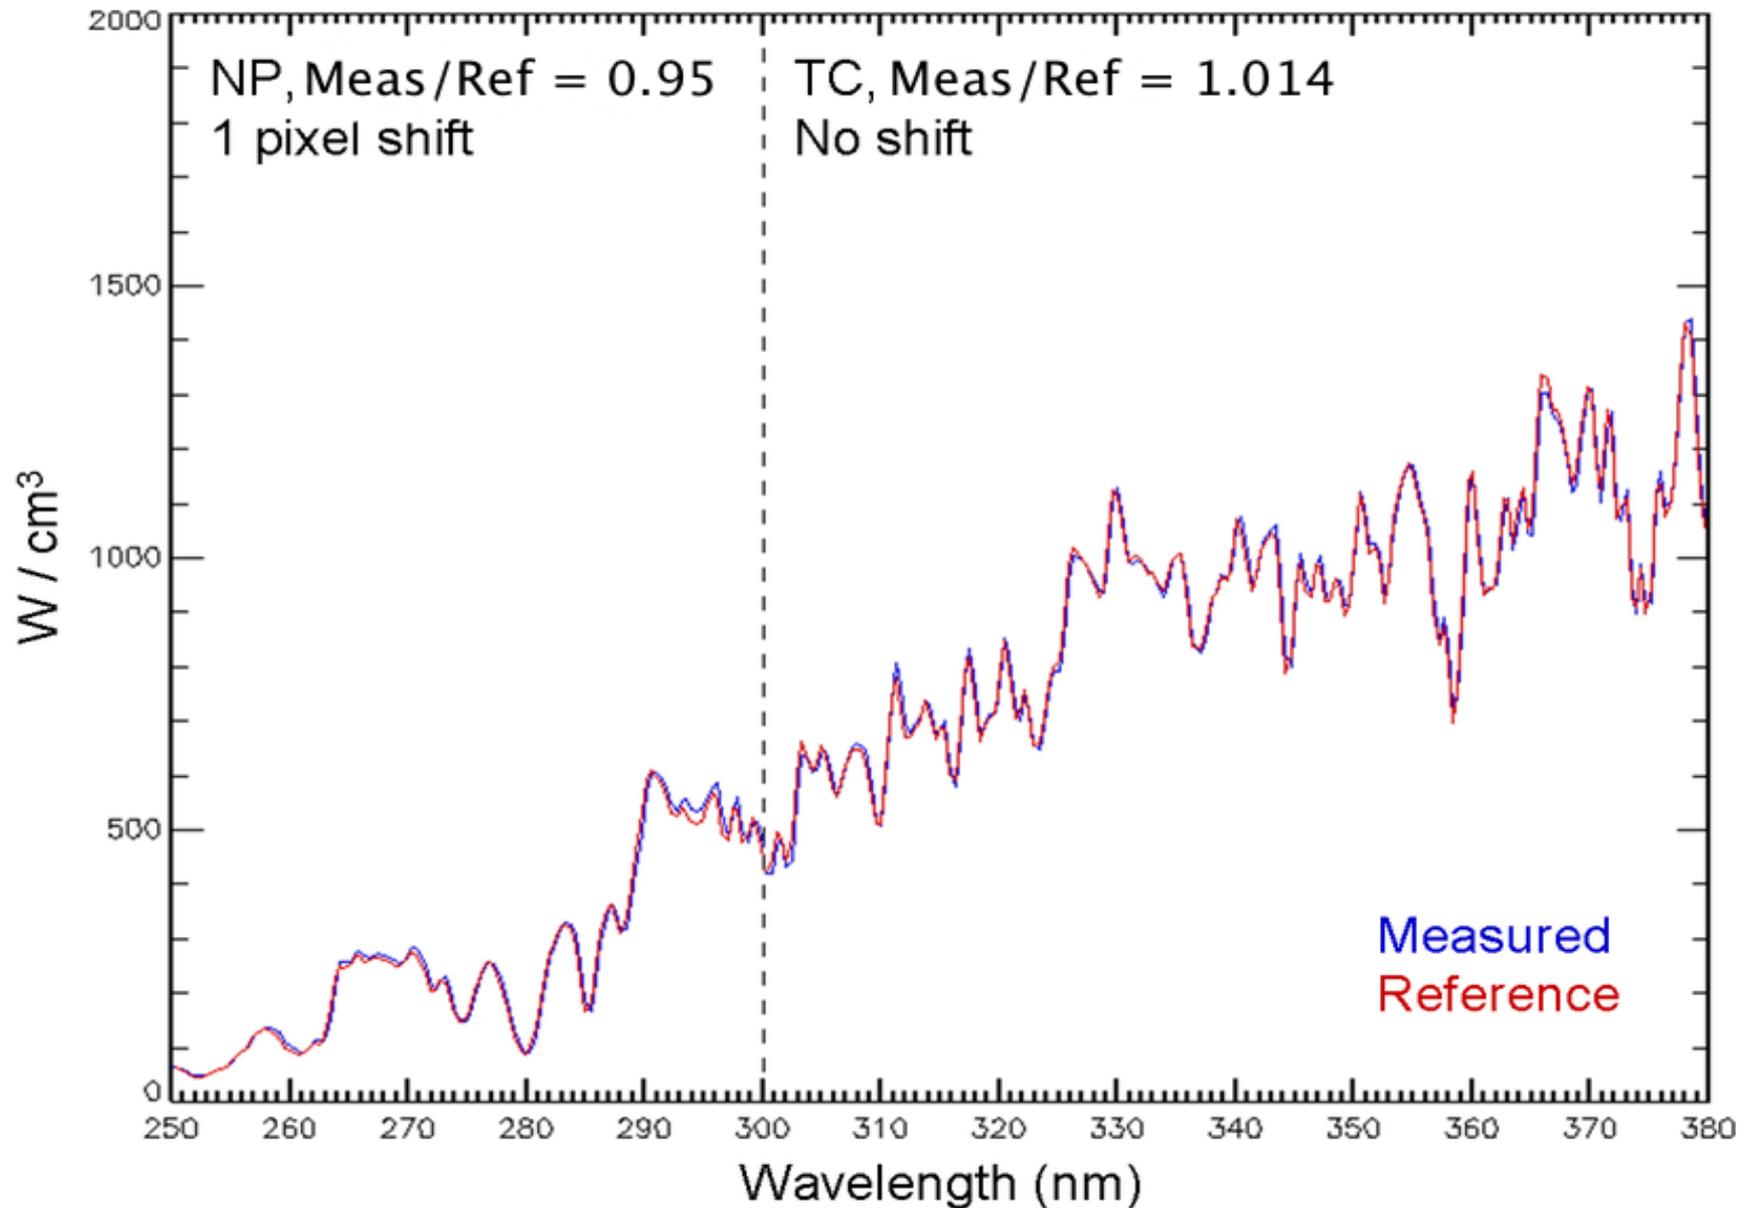

# Ozone Products Team Members' Roles & Responsibilities

Area	Name	Organization	Funding Agency	Task
Cal/Val	L. Flynn (0.2 L) I.Petropavlovskikh(L) C. Long/H. Liu (L/C) W. Yu/E. Beach (C/C)	NOAA/STAR NOAA/ESRL NOAA/NCEP NOAA/STAR	STAR ESRL/JPSS NWS/JPSS JPSS	Plan/Lead/Coord. Ground-based Assimilation Satellite/Internal
Nadir Algorithms	L.Flynn/T. Beck (0.4) Z.Zhang/J.Niu (C/C) C.Seftor (C) +2 FTEs W.Wolf's Team (C)	NOAA/STAR NOAA/STAR NASA GSFC NOAA/STAR	STAR JPSS NPP ST/PEATE JPSS	Evaluate, Develop, Improve, Implement
Limb Algorithms	P.K. Bhartia (L) M.Linda (C) L.Flynn (0.2) E-M Devaliere (C)	NASA LaRC NASA GSFC NOAA/STAR NOAA/STAR	NPP ST PEATE STAR PSDI	R&D Testing Transition Lead Science Code Transfer
Climate Data Records	R.McPeters (L) 2 FTEs (C/C) L.Flynn (0.2 L) Z.Zhang/E.Beach (C/C)	NASA GSFC NASA GSFC NOAA/STAR NOAA/STAR	NPP ST ST/MEASURES STAR NOAA/JPSS	(Implementation, Evaluation, Validation, & Reprocessing)

(L) Team Lead, (C) Contractor

# Related Roles & Responsibilities for OMPS Products

Area	Name	Organization	Funding Agency	Task
Nadir SDR	F. Wu (0.2L)	NOAA/STAR	STAR	(Calibrate, maintain, improve, validate, evaluate, and monitor)
Sensor Scientist	T. Beck (0.4)	NOAA/STAR	STAR	
	C. Pan	UMD	JPSS	
	G. Jaross (CL)	NASA GSFC	NPP ST	
	3 FTE (C)	NASA GSFC	JPSS	
	R. Buss	Raytheon	JPSS	
Limb SDR	G. Jaross (CL)	SSAI	NPP ST	“Calibrate, . . . .”
	M. Linda (C)	SSAI	PEATE/NPP ST	
Instr.Scientist	S. Janz (L)	NASA GSFC	JPSS	Calibration, Acquisition Eng. Support
Instr.Manager	M Matsumura (L)	NASA GSFC	JPSS	
Nadir Products	M. Caponi (J)	DPA	JPSS	Dev/Test ConOps (ADA, Science Algorithms)
	B. Sen, K. Jordan, M. Novicki (C)	NGAS	JPSS	
IDPS	D. Stuhmer, D. Cumpton, etc.	Raytheon	JPSS	EV and Cal; RDR, SDR, and EDR
JPSS	Numerous	DPA, DPE, etc.	JPSS	(AT)DRs, ConOPS, ADL, Data, Code, etc.

# Implementation of the Version 8 Total Ozone and Ozone Profile Algorithms with the Ozone Mapping and Profiler Suite (OMPS) to Continue Ozone Climate Data Records

D. Swales<sup>1,4</sup>, Z.-H. Zhang<sup>1</sup>, L. Flynn<sup>2</sup>, E. Beach<sup>1</sup>, W. Yu<sup>3</sup>, J. Niu<sup>3</sup>, Y. Hao<sup>1</sup>

1 L.M. Systems Group Rockville MD 20852; 2 NOAA NESDIS 5200 Auth Rd, Camp Springs MD 20746; 3 Earth Resource Technology Laurel MD 20707; 4 Currently with CIRES, Boulder CO 80305



## Introduction



NOAA, through the Joint Polar Satellite System (JPSS) program, is advancing its polar-orbiting satellite system with new instruments for weather forecast and climate monitoring. The first satellite, the Suomi National Polar-orbiting Partnership satellite (S-NPP), was launched on October 28, 2011 [in partnership with National Aeronautics and Space Administration (NASA)]. See <http://npp.gsfc.nasa.gov/> for information on the payload complement of our instruments. The Ozone Mapping and Profiler Suite (OMPS) onboard the S-NPP satellite (and future JPSS satellites) is the next generation of US operational space-borne UV and ozone monitoring instruments.

The suite consists of two telescopes feeding three detectors measuring solar radiance scattered by the Earth's atmosphere and solar irradiance by using diffusers. The measurements are used to generate estimates of total column ozone and vertical ozone profiles. [1,2] NOAA and NASA are working to continue the Satellite UV Climate Data Records for Total Column Ozone and Ozone Profiles with the measurements from these new instruments. The total ozone (V8TOZ) and vertical ozone profile (V8PRO) climate data records (CDRs) are long-term datasets that have been derived by applying the Version 8 retrieval algorithms [3] to measurements obtained over the last 33 years from several UV spectrometers onboard various satellites. The V8TOZ CDR is derived from measurements obtained by the SBUV, SBUV/2, TOMS, and OMI instruments. The V8PRO CDR is derived from data obtained by the SBUV and SBUV/2 instruments. The OMPS Nadir Profiler (OMPS NP) replaces the NOAA Solar Backscatter Ultraviolet (SBUV/2) series of instruments as a source of measurements for the profile CDR and the OMPS Nadir Mapper (OMPS NM) replaces the SBUV/2 and TOMS series.

The OMPS consists of three spectrometers; two nadir viewing and one limb viewing, however only the products from the nadir instruments will be discussed here. (See related presentation at this meeting on the OMPS Limb Profiler: in 4D Ozone vertical profile measurements with the OMPS Limb Profiler, in 3Ea Initial assessment of OMPS sensor performance, and in 3Ea Data from the OMPS Limb Profiler: How and when it will be available, etc.)

The OMPS NM (total column ozone sensor) uses a single grating and a CCD array detector to make measurements every 0.42 nm from 300 nm to 380 nm with 1.0-nm resolution. It has a 110° cross-track FOV and 0.27° along-track slit width FOV. The measurements are combined into 35 cross-track FOVs: 3.35° (50 km) at nadir, and 2.84° at ±55°. The resolution is 50 km along-track at nadir, with a 7.6-second reporting/aggregation period.

The OMPS NP (nadir ozone profile sensor) uses a double monochromator and a CCD array detector to make measurements every 0.42 nm from 250 nm to 310 nm with 1.0-nm resolution. It has a 16.6° cross-track FOV, 0.26° along-track slit width. The reporting period is 38 seconds giving it a 250 km x 250 km cell size collocated with the five central Nadir Mapper cells.



OMPS Minimum Reflectivity Cross-Track Dependence. The lines in the figure show the weekly, one-percentile effective reflectivity values for the four weeks in the month of June for all the data in a latitude/longitude box in the Equatorial Pacific versus cross-track view position. (17 is the nadir position and 0 and 34 are the extreme viewing angles.) We expect the one-percentile effective reflectivity value to be approximately 4% for this region of the globe from climatological measurements made by other instruments. The different values and the cross-track dependence observed here are due to inaccuracies in the initial spectra and radiance calibration. While each pixel in an OMPS CCD array can be considered as an independent instrument, reproducible internal comparisons such as this one allow us to track their relative calibration very accurately.

## References

- [1] Juan V. Rodriguez, et al., "An overview of the nadir sensor and algorithms for the NPOESS ozone mapping and profiler suite (OMPS)," *Proc. SPIE*, 4891, April 2003, DOI: 10.1117/12.467525.
- [2] *Earth Science Satellite Remote Sensing Vol. 1: Science and Instruments*, Qiu, J.J., et al. (Eds.), 2006, Springer Verlag, ISBN: 978-3-540-35606-6. "Chapter 21: Introduction to the Ozone Mapping and Profiler Suite (OMPS)," L. Flynn, C. Seifor, J. Larsen, and P. Xu, Springer Verlag, July 2004.
- [3] *Solar Backscatter Ultraviolet Instrument (SBUV/2) Version 8 Ozone Retrieval Algorithm Theoretical Basis Document (V8 ATBD)*, Edited by L. Flynn (Last Revision February 2, 2007) [http://star.nesdis.noaa.gov/smed/spb/calibration/icvss/sbuw/dec/SBUV2\\_V8\\_ATBD\\_020207.pdf](http://star.nesdis.noaa.gov/smed/spb/calibration/icvss/sbuw/dec/SBUV2_V8_ATBD_020207.pdf)
- [4] Quinn P. Remund, et al., "The ozone mapping and profiler suite (OMPS): on-orbit calibration design," *Proc. SPIE*, 5652, pp.165-173, December 2004. Related talks and posters at the QOS 2012:



3Ea Verification and early Operations for the Ozone Mapping and Profiler Suite (OMPS)  
4C Use of the OMPS Nadir Data to Extend Long-term Ozone Climate Records  
NOAA Satellite Ozone Product Monitoring:  
[http://www.star.nesdis.noaa.gov/icvss/PROD/prd/OMPSbeta.TOZ\\_V8.php](http://www.star.nesdis.noaa.gov/icvss/PROD/prd/OMPSbeta.TOZ_V8.php)  
<http://www.ospo.noaa.gov/Products/atmosphere/>

Opinions expressed are those of the authors and do not imply any official positions of NOAA or the JPSS Program. Work was supported by NOAA, NASA, the JPSS Program, and the NDCD Science Data Stewardship Program. OMPS data used in figures are at Beta maturity level – minimal validation with changes expected and not ready for use in scientific studies.

## Algorithm Adaptation

To properly adapt the V8PRO and V8TOZ algorithms to be used with measurements obtained from the OMPS instrument, new radiative transfer look-up-tables (RT LUTs) had to be created by using monochromatic radiance forward model results and the OMPS instrument slit functions. The Ring effect was incorporated into the monochromatic radiance prior to the convolution with the OMPS slit functions. To account for the effects of a spectral smile in the OMPS NM data, RT LUT results are generated over a range around each channel's target wavelength. The RT LUT's entries are interpolated within the retrieval algorithm to construct a table at the proper wavelength center. The 12 channels for the V8TOZ have nominal band centers at: [308.7, 310.8, 311.9, 312.6, 313.2, 314.4, 317.6, 322.4, 331.3, 345.4, 360.2, 372.8] nm. This RT LUT interpolation scheme also allows for the correction of any identified intra-orbital shifts or long-term drift in the wavelength scale.




For the V8PRO, the OMPS NP slit function was implemented into the retrieval algorithm for single-scattering calculations at the shorter wavelengths:  $\lambda < 287$  nm. The 12 channels currently used in the V8PRO have band centers at: [252.273, 283.288, 292.298, 302.306, 313.318, 331.340] nm. The eight shortest channels are taken from the OMPS NP and the four longer channels are taken from the OMPS NM (aggregated to match the OMPS NP 250x250 KM<sup>2</sup> resolution).

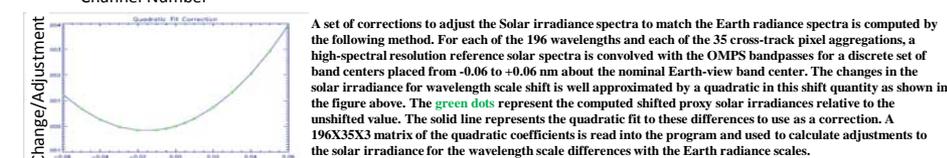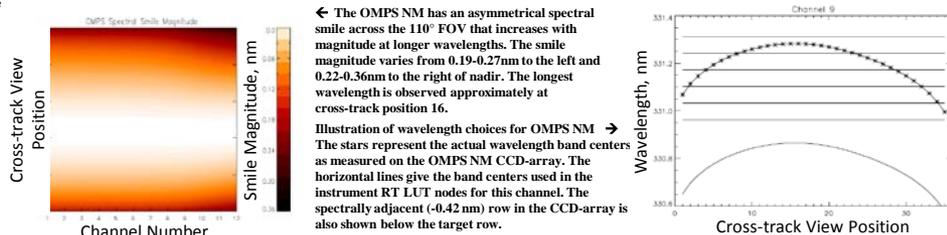

## Comparisons to Contemporaneous Record Components

While the OMPS is a new suite of instruments, we are fortunate that its ozone records will overlap with those from other instruments contributing to the ozone CDRs. For the total ozone products, we can make extensive comparisons with zonal means and the full daily maps from other satellite products. We will also compare each individual component of the record to ground-based assets, e.g., the Dobson Network. An example with SBUV/2 total ozone is given below.

For the ozone profile products will make zonal mean comparisons. We will also use chasing orbit comparisons – orbits with nadir tracks closely matched in space and time. An example pair of orbits is given in the figure to the right. We will also use no-local-time-difference latitude comparisons – If one examines a pair of ascending and descending polar-orbiting satellites, e.g., S-NPP and NOAA-17, they will find two latitudes where the nadir views are at the same local time of day for both. One is on the day side and the other 180° away on the night side with a 12-hour difference in local time. This allows comparisons with similar viewing conditions and avoids complications from diurnal effects.

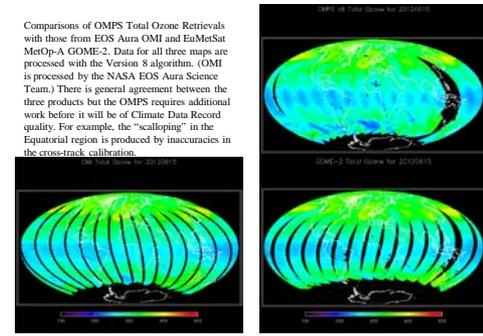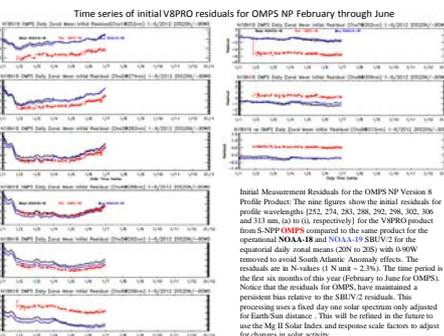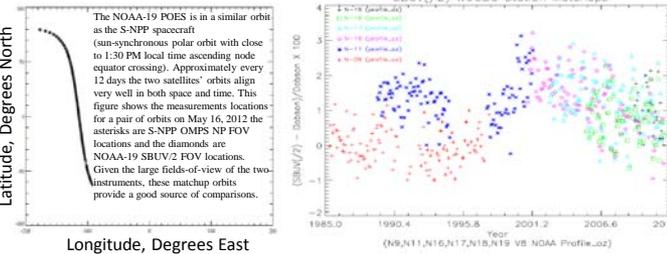

# Suomi-NPP Product Validation for the Ozone Mapping and Profiler Suite (OMPS)

L. Flynn<sup>1</sup>, D. Swales<sup>2,3</sup>, J. Niu<sup>4</sup>, E. Beach<sup>3</sup>, W. Yu<sup>4</sup>, C. Sefator<sup>5</sup>, G. Jaross<sup>6</sup>, Y. Hao<sup>3</sup>, I. Petropavlovskikh<sup>2</sup>, and C. Long<sup>1</sup>  
<sup>1</sup>NOAA/NESDIS, 5200 Auth Rd., Camp Springs MD 20734 US [Lawrence.E.Flynn@noaa.gov](mailto:Lawrence.E.Flynn@noaa.gov), <sup>2</sup>CIRES Boulder CO, <sup>3</sup>IMSG Kensington MD, <sup>4</sup>ERT Laurel MD, and <sup>5</sup>SSAI Lanham MD.




## Introduction

NOAA, through the Joint Polar Satellite System (JPSS) program, in partnership with the National Aeronautics and Space Administration (NASA), launched the Suomi-National Polar-orbiting Partnership (S-NPP) satellite on October 28, 2011. The JPSS program is executing the S-NPP Calibration & Validation program to ensure the data products comply with the requirements of the sponsoring agencies. The Ozone Mapping and Profiler Suite (OMPS) consists of two telescopes feeding three detectors measuring solar radiance scattered by the Earth's atmosphere and solar irradiance by using diffusers [1]. The measurements are used to generate estimates of total column ozone and vertical ozone profiles. The validation efforts make use of external resources in the form of ground-based and satellite measurements for comparisons, and internal consistency methods developed over the last thirty years. This poster provides information on the state of the execution of the OMPS Cal/Val Plan with emphasis on the measures of the instrument performance from internal consistency analysis techniques and comparisons to other satellite instrument products for the validation of the NPP OMPS environmental data products.


## Instruments & Measurements

The total column sensor uses a single grating and a CCD array detector to make measurements every 0.42 nm from 300 nm to 380 nm with 1.0-nm resolution. It has a 110° cross-track FOV and 0.27° along-track slit width FOV. The measurements are combined into 35 cross-track bins: 3.35° (50 km) at nadir, and 2.84° at ±55°. The resolution is 50 km along-track at nadir, with a 7.6-second reporting period. (This resolution choice is changeable; we are investigating the use smaller FOVs.) The nadir profile sensor uses a double monochromator and a CCD array detector to make measurements every 0.42 nm from 250 nm to 310 nm with 1.0-nm resolution. It has a 16.6° cross-track FOV, 0.26° along-track slit width. The reporting period is 38 seconds giving it a 250 km x 250 km cell size collocated with the five central total column cells.


The limb profile sensor is a prism spectrometer with spectral coverage from 290 nm to 1000 nm. It has three slits separated by 4.25° with a 19-second reporting period that equates to 125 km along-track motion. The slits have 112 km (1.95°) vertical FOVs equating to 0 to 60 km coverage at the limb, plus offsets for pointing uncertainty, orbital variation, and Earth oblateness. The CCD array detector provides measurements every 1.1 km with 2.1-km vertical resolution. The products for the Limb Profiler are not discussed here. (See the OMPS Limb Presentation in Session 4D for more information.)

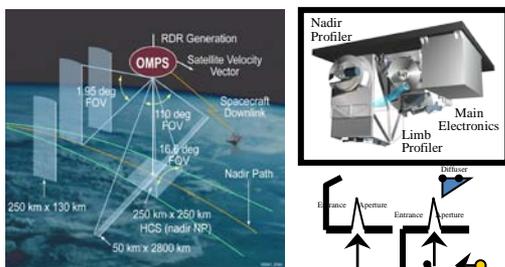

Instrument Fields of View. Schematic from Ball Aerospace and Technology Corporation.




Each instrument has two solar diffusers; a working and a reference.



Typical spectra from 310 to 380 nm for OMPS Nadir

## Calibration System


The OMPS instruments (Nadir Mapper, Nadir Profiler, and Limb Profiler) are designed to take a set of measurements to allow analysts to maintain the instrument characterization and calibration [2]. For each of the instruments, this task can be broken into two components, tracking the performance of the CCD array detector and electronics, and tracking the performance of the optical components, that is, the telescopes and spectrometers. The instruments make measurements on the night side of orbits with the apertures closed. One set is made without any sources and is used to track the CCD array dark currents. Another set is made with illumination by an LED and is used to track CCD non-linearity and pixel-to-pixel non-uniform response. The instruments also make solar measurements using pairs of diffusers. Judicious operation of working and reference diffusers allows analysts to track the diffuser degradation. The solar measurements also provide check on the wave-length scale and bandpass. The instruments have completed multiple passes through their internal dark and nonlinearity calibration sequences and are beginning to make solar measurements.

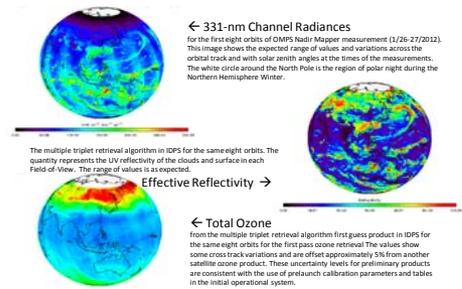

## References

- [1] Juan V. Rodriguez, et al., "An overview of the nadir sensor and algorithms for the NPOESS ozone mapping and profiler suite (OMPS)", *Proc. SPIE*, 4891, April 2003.
- [2] Quinn P. Remund, et al., "The ozone mapping and profiler suite (OMPS): on-orbit calibration design", *Proc. SPIE*, 5652, vol. 173, December 2004.
- [3] Earth Science Satellite Remote Sensing Vol.1: Science and Instruments, Qiu, J.J., Gao, W., Kafatos, M., Murphy, R.E., Salomonson, V.V. (Eds.), 2006, Springer Verlag. "Chapter 21: Introduction to the Ozone Mapping and Profiler Suite (OMPS)", L. Flynn, C. Sefator, J. Larsen, and P. Xu, Springer Verlag, July 2004.

## First Light Products are Beta Quality




Comparison of daily mean total column ozone estimates from SBUV/2, NOAA-18 (BLA CK) & NOAA-19 (GRB EN), NPP OMPS (RED) and MetOp-A GOME-2 NOAA V8 Processing (BLUE) for February 2012 for a latitude/longitude box in the equatorial Pacific.


This work was supported by NOAA, NASA, the JPSS Program, and the NCD Science Data Stewardship Program. Opinions expressed are those of the authors & do not imply any official positions of NOAA or the JPSS Program

## Internal Consistency and Measurement Information Content

The product retrieval algorithms are designed to use measures of Earth radiance to solar irradiance, to make use of pairs and triplets of measurements, and, in the case of the Limb profiler, to use normalization to measurements at reference tangent heights, greatly reducing sensitivity to instrument throughput changes [3]. The hyperspectral nature of the detectors provides information at wavelengths not used directly in the retrieval algorithm. Residuals for these measurements are used to check the consistency of the retrieved quantities. For example, differences in the ozone absorption cross-section for channels between 306 nm and 313 nm provide a test of the retrievals for equatorial viewing conditions. The differential sensitivity of the top of atmosphere radiances at reflectivity channels from 340 nm to 360 nm to satellite viewing angles and solar zenith angles provide opportunities to check the calibration by comparisons of derived cross track minimum reflectivity estimates. Empirical Orthogonal Function (EOF) analysis was conducted on the covariance matrix for spectra for the central cross-track position for the 365 nm to 380 nm wavelength range for parts of six orbits on 1/28/2012. The first two patterns contain 90% of the variability after removing a 3<sup>rd</sup> order polynomial from Radiance divided by the Average Radiance. The two patterns are primarily combinations of Wavelength Scale Shift and Ring Effect/Stray Light variations.

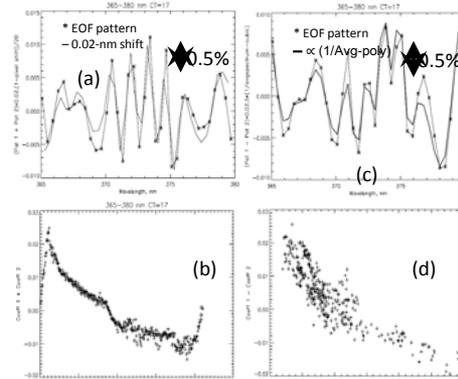

Figures (a) and (b) show the sum of the first two EOF patterns (a) and the coefficients (b) for the first orbit. (a) also has the computed variations expected from a 0.02-nm wavelength scale shift. The two curves agree very well. The pattern of the coefficients in (b) may be related to wave-length scale changes produced by intra-orbital variations in the optical bench temperatures. While the shifts are small, we plan to implement a correction/adjustment to improve the ozone products. Figure (c) shows the differences of the first two EOF patterns. Now the additional curve is a scaled reciprocal of the average spectrum pattern. Again, the two curves agree very well. One might expect this pattern to be produced by inelastic scattering (Ring Effect) or out-of-band stray light. The figure on the Bottom Right tests this by looking at the dependence of the coefficients (y-axis) with the 375 nm radiances (x-axis). The inverse relationship between the two suggest that the major source of these variations is the Ring Effect – not Stray Light. The OMPS NPP Science Team has plans to exploit this signal to create UV cloud optical centroid estimates. Given the radiance levels, a 0.01 pattern in values in figures (a) and (c) equates to approximately a 1% radiance variations.

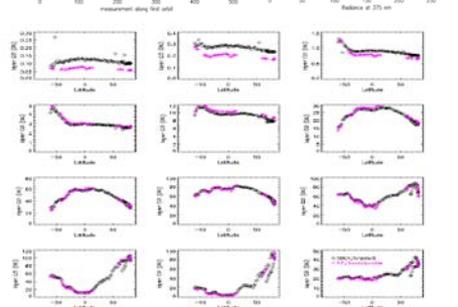

The figures above have comparisons of the ozone profile retrievals between the OMPS Nadir Mapper operational (Currently Version 6) ozone profiles and the NOAA-19 SBUV/2 processed with the Version 6 ozone profile retrieval algorithm. The data are from a single pair of orbits on May 16, 2012 where the two satellites are flying in formation (orbital tracks within 50 km and sensing times with 10 minutes). The ozone profile retrievals are reported in Dobson units for 12 pressure layers. They are plotted here versus Latitude. The 12 Umkehr layers boundaries are at: 10,0,0.25,0.50,0.99,1.98,3.96,7.92,15.8,31.7,63.3,127.0,253.0,10131hPa.

The top three layers' results are in the top row with the topmost layer on the upper left. The lowest layer's results are in the figure on the bottom right. The OMPS Nadir Profiler values are in Pink, and the SBUV/2 are shown in Black. The figures show general agreement between the retrievals for the two instruments but with the OMPS NP retrieving much smaller values at the top of the profiles. This is probably due to inaccuracies in the initial calibration of the shorter wavelength channels but could also be symptomatic of stray light.

## Rapid Comparison to Other Products

The ozone products from the OMPS Nadir Profiler are compared to similar products from the operational Solar Backscatter Ultraviolet instruments (SBUV/2) and ground-based Dobson and Brewer instruments operated in the Umkehr mode. Comparisons of the OMPS NP zonal means of ozone profiles and initial measurement residuals with the currently monitored set of results for the SBUV/2 instruments on NOAA-16, -17, -18, and -19 are taking place. Of particular interest are those computed for instruments in similar orbits (NOAA-19 and NOAA-18 SBUV/2s) at all latitudes and for those computed for NOAA-17 SBUV/2 in a morning orbit for no-local-time difference latitudes. (If one examines a pair of ascending and descending polar-orbiting satellites, they will find two latitudes where the nadir views are at the same local time of day for both. One on the day side and the other 180 degrees away on the night side with a 12-hour difference in local time.) For the OMPS Nadir Mapper, we are making comparisons of its global ozone, effective reflectivity and aerosol products to similar ones from the Ozone Monitoring Instrument (OMI) and to the Global Ozone Monitoring Experiment (GOME-2). Sets of overpass match up values for the satellite instruments with ground-based locations have been expanded to include OMPS products.

OMPS data are at Beta maturity levels; minimally validated with changes expected and not ready for use in scientific studies. The OMPS SDR and EDR data sets are available to the public at <http://www.nsof.class.noaa.gov>.


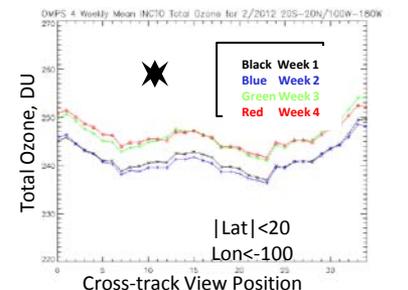


Figure weekly-mean total column ozone (OMPS Nadir Mapper First Guess retrievals) as a function of the cross-track view angle for the region defined by 20S to 20N Latitude and 100W to 180W Longitude. The persistent cross-track bias are produced by deficiencies in the initial radiance calibration relative to the solar data irradiance values.

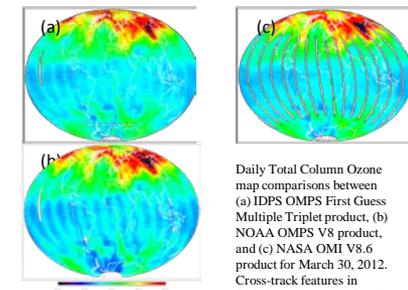

## Relevant talks & posters at the OOS 2012

- 4C The Use of OMPS Nadir Data to Extend Long-term Ozone Climate Records
- 4D Ozone vertical profile measurements with the OMPS Limb Profiler
- 3Ea Initial assessment of OMPS sensor performance
- 3Ea Implementation of the Version 8 Total Ozone and Ozone Profile Algorithm for OMPS to Continue Ozone Climate Data Records
- 3Ea Data from the OMPS Limb Profiler: How and when it will be available, etc.