Joint Polar Satellite System (JPSS)



## THE JOINT POLAR SATELLITE SYSTEM THROUGH PROVING GROUND INITIATIVES

#### **Mitch Goldberg**


**Program Scientist** 

Joint Polar Satellite System National Environmental Satellite, Data, and Information Service U.S. National Oceanic and Atmospheric Administration U.S. Department of Commerce

CPO meeting January 30, 2017



#### JPSS will provide critical observations for the next two decades and JPSS also provides a science program

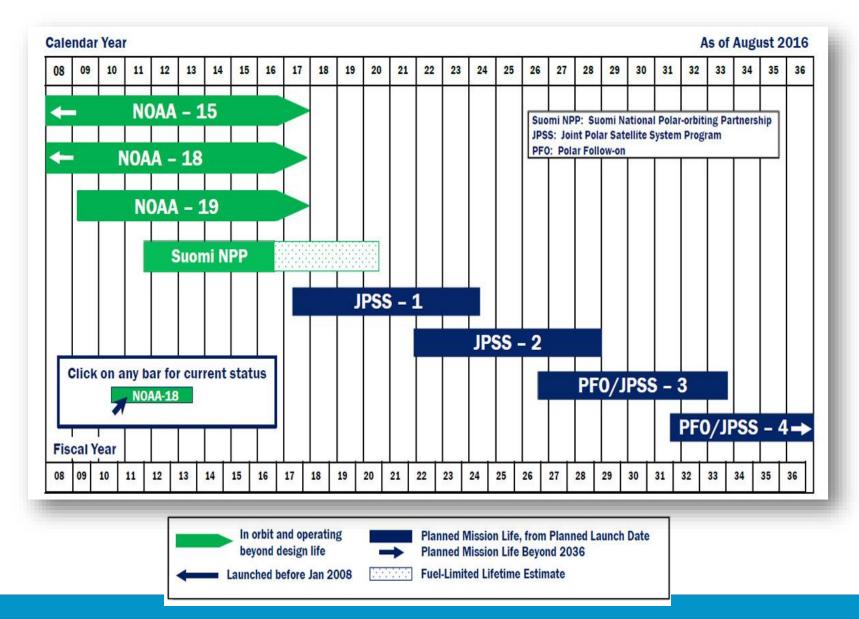



## **Robust Science Program**

- User requirements and prioritization
  - Determining and prioritizing products user needs Critical, Supplemental High, Supplement Low(subset of critical becomes Key Performance Parameters (KPP) via LORWG, TPIO, NOSC
  - User input gathered via the LORWG, chaired by Program Scientist.
  - User workshops/conferences to reach broader community
  - Assessing solutions to meet requirements, does the proposed system satisfy the need?.
- Algorithms and Cal/Val
  - Develop algorithms to generate products- meeting requirements (accuracy, precision, latency)
  - Develop tools to visualize /validate the products
  - Generate validation reports, understanding and correcting outliers
  - Provide science and R2O maturity artifacts (Enterprise Life Cycle)
    - ATBDS, Cal/Val Plans, User manuals, Preliminary and Critical Design Reviews, Algorithm and Operational Readiness Reviews
  - Reprocess mission data to maintain consistency of products after algorithms errors are corrected or improvements are made to the algorithm, and deliver reprocessed data to NCEI
  - Delivery of software packages to operations & CSPP (Direct Broadcast package)



## Robust User Readiness Program

- User Readiness (Proving Ground)
  - User engagement and priorities through JPSS Proving Ground Executive Board and Satellite Development Executive Board and Proving Ground and User Readiness Meeting.
  - Projects to improve NOAA products and services throughout NOAA LOs via infusion of JPSS data into applications (prioritized by PGED/SDEB).
  - Proving Ground Initiative Process for improved user interactions
  - Training for better understanding of how to best use our products in key applications
- New Science (Risk Reduction)
  - To meet user needs (e.g. flood mapping and river ice, improved data fusion of multiple data source)
  - User of Direct Readout to test new algorithms or to further reduce latency.



## Challenge

JPSS Program Data Products

User Readiness: Products to Applications

Ensure users are ready for JPSS data and improve their key operational and research product and services


 $\checkmark Severe$  weather forecasts and warnings

Aviation weather forecasts and warnings
Improve fire and air quality forecasts and warnings

✓ Improve warnings and prediction of poor water quality in coastal regions

 $\checkmark$  Improve drought, precipitation, snow and ice assessments and predictions

Periodic feedback from keys users on the impact of JPSS data and to identify improvements needed for products and applications

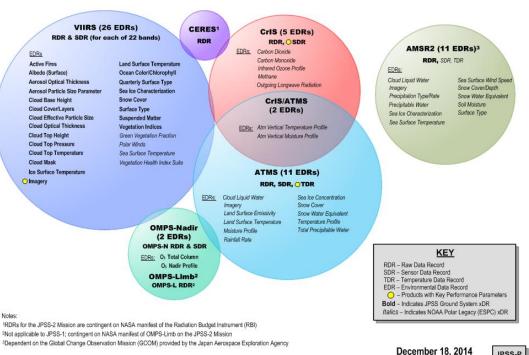


The JPSS Program includes Ground System Support for the Metop, DMSP, and GCOM missions

December 10, 2014 This chart is controlled by JPSS Program Systems Engineering JPSS-P Rev C



## **Work through Service Areas**

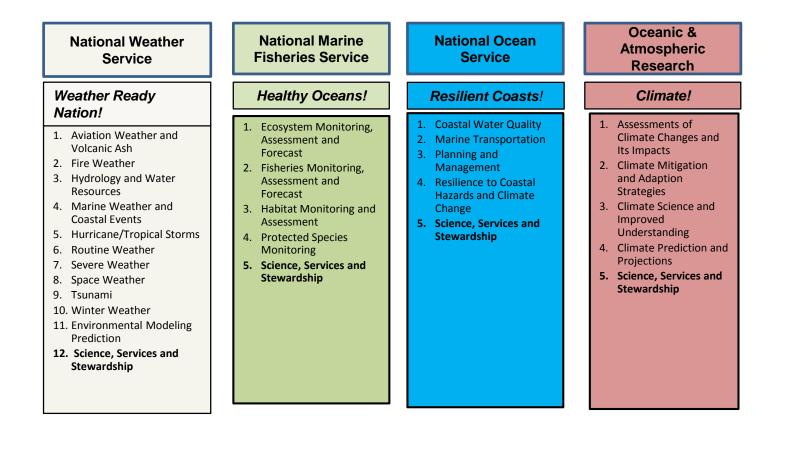



## **Proving Ground Initiatives**

What is an initiative? An interagency group of developers, service area providers, and stakeholders that frequently interact in a structured forum to address challenges in NOAA and partner service areas.

## Initiative activities

Products/capabilities are evaluated to ensure their optimal use in these focus areas.

Based on user feedback, changes to these capabilities are considered to increase their effectiveness

Actions to transition these capabilities to user operations are identified and implemented

### Why are initiatives successful?

Well defined objectives established and specific actions worked

Stakeholders are actively participating with engagement of the user advocate.

Products and capabilities are evaluated in operational environments

Monthly and bi-monthly meetings ensure proposed improvements can be worked on and then implemented quickly


## **PGRR Proving Ground Initiatives**

- River Ice and Flooding
- Fire and Smoke (Aerosols)
- Sounding Applications
- NWP Data Assimilation
- Imagery/Nowcasting
- Ocean and Coastal

- Hydrology
- Arctic
- Land Data Assimilation
- Atmospheric Chemistry



## **NWS utilizing JPSS Data**

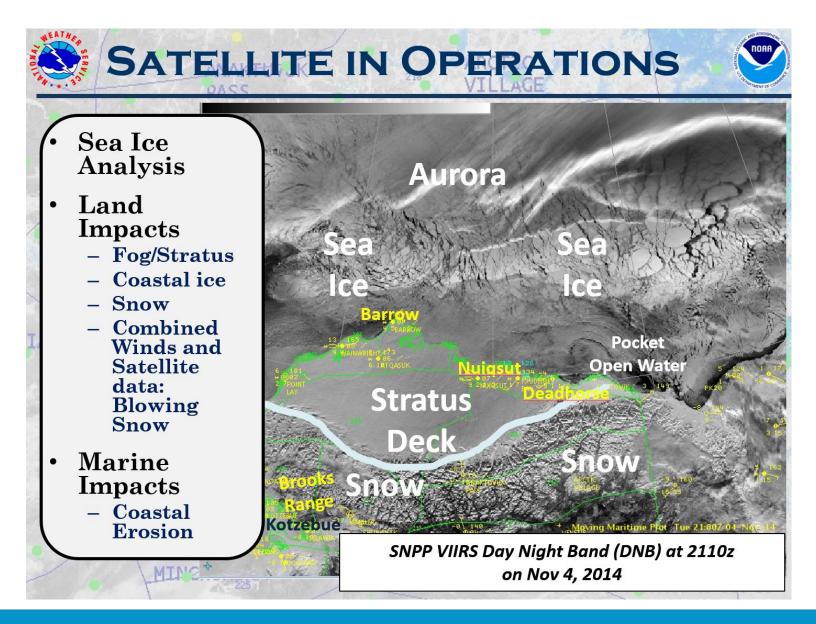



## **NWS River Forecast Centers utilizing JPSS Data**

#### A Case Study of the 2015-2016 Mississippi River Basin Flood Using Suomi-NPP VIIRS Flood Products



#### Mike DeWeese NWS North Central River Forecast Center Chanhassen, MN 55317



#### Background

Historic flooding from an unusual winter rainfall event impacted Missouri in December 2015. Rain amounts of 8-10 inches fell along a 60 mile-wide band across the Meramec and lower Missouri Rivers, and into the Illinois River basin. The heavy rain event fell on saturated ground due to rainfall over the previous week, causing widespread major to record flooding. Rivers spilled into the flood plain as numerous levees were breached and water backed up into tributaries. River forecast models were adjusted in real time, based on observed information, to account for these dynamic conditions as they occurred during this event.

One new source of observed data utilized was the Flooded Area imagery from the Suomi-NPP VIRS satellite, developed by George Mason University. This experimental product has been under development since 2014 and proved valuable in determining the flood inundated areas, providing forecasters and decision makers with detailed inundation imagery over extensive areas.



many room into later, built for and on the second second



VIIRS near-real-time flood maps:

Coverage: any regions between 80° 5 and 80° N. Spatial resolution: 375-m
Fined types: sapra-segment soil flood and sapra-snowlice flood.

Resiliarth (a web-based mapping service). RhOFaPPIN available online or via mobile app


Classification types: Cloud, Snow, River/Lake Ice, Shadow (cloud shadow and terrain shadow). Supra-snow-lice, Normal Open Water, and Flooding Water fractions of supra-vep-hare soil floods.

http://realearth.ssec.wisc.edu/


Daytime 375-m resolution JPSS VIIRS Flood Products are distributed to forecasters in AWIPS and to the general public via

#### **VIIRS Processing and Dissemination**

The VIIRS floodwater fraction product has been available routinely at five River Forecast Centers in the USA since 2014, under the support of the Joint-Polar Satellite System Proving Ground and Risk Reduction Program (JPSS/PGRR). The 375 meter resolution VIRS images are processed initially at GMU, then sent. to the Cooperative Institute for Meteorological Satellite Studies (CIMSS) at the University of Wisconsin. From there the images are repackaged for dissemination in AWIPS. The images are also downscaled from the native 375 M resolution to 30 M high resolution images available in the web based Real Earth viewer at CIMSS.



The downscaled 30-m flood maps present a lot more inundation details than the original VIIRS 375-m flood maps.



WISCONSIN



US Army Corps of Engineers made a map book using VIIRS 30-m flood maps along the Illinois River during the Midwest flood event in January 2016









(OHRFC and LMRFC) for their use as the flooding progressed to other regions.






**Downscaling and Operational Applications** 

River forecasters used the imagery to adjust models for extensive flood plain storage effects, thereby improving model simulations of river levels at downstream points. The images were also provided to the FEMA Region VII Regional Response Coordination Center (RRCC) for daily briefings and high level response planning. The USACE Rock Island District used the images to

develop a flood playbook for Emergency Managers to monitor levee conditions on the Illinois River. Finally, the images were provided to the Ohio and Lower Mississippi River Forecast Centers





Ubove: Scatter plot between VIIRS retrieved water surface invels and water levels from river gauge observations. during 2016's Midwest flood event

> Left: VIIRS 375-m flood water surface level map along the Mississippi River Basin on Jan. 12, 2016.

#### **Future Development**


Developers are working with the NCRFC to create water level images in addition to flood areas. Results have been validated within one meter accuracy for several events based on the 30 M STRM DEM dataset. The potential for improved vertical accuracy within one foot or less is high using the 10 M NED dataset, which will be completed in the next phase of the project. This will provide forecasters with quantitative gridded forcings that can be used to directly calculate storage volumes in river models, which have never been available before.

10



## **NOAA's OAR utilizing JPSS data**

## Improving smoke forecasting

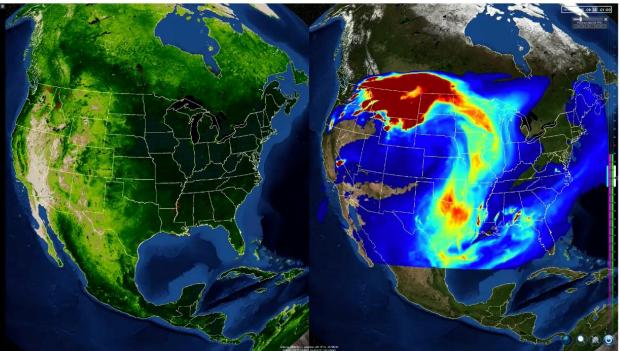

# WILDFIRE TODAY

NOAA experiments with forecasts for wildfire smoke

ugust 4, 2016





The National Oceanic and Atmospheric Administration is experimenting with a system that produces forecasts for the distribution of smoke from wildfires.

The examples of their products created at 6 a.m. MDT August 4 for near surface smoke are included here - predicting conditions for 6 p.m. MDT August 4 (above) and 6 p.m. August 5 (below). Click the images to see larger versions.

Developers are collecting feedback from users to improve the model befo it is considered for transfer into operations.

The HRRR-Smoke air quality modeling system simulates the emissions and transport of smoke from wildfires detected by the VIIRS/IPSS satellite fire product in high spatial resolution (3km) over the CONUS domain. Currently the model is run every 6 hours (00, 06, 12 and 18 UTC) to produce smoke forecasts for next 36 hours. The forecast products of nearsurface and vertically integrated smoke concentrations are visualized on a GSD web-site in real time: http://rapidrefresh.noaa.gov/HRRRsmoke/



MOST VIEWED POSTS LAST 24 HOURS

Credit: Ravan Ahmadov, OAR and Jeff Stewart, CIRA



## **Highlights from the Science Teams**



#### Blended TPW view on February California Flooding

The blended TPW product is being included in a package being put together by NOAA HQ highlighting each line office's contributions to the observation of and response to the severe flooding California in February.

The blended TPW product uses many data sources including MIRS from Suomi NPP ATMS and GAASP from GCOM ASMR-2 to produce a map of the total precipitable water in the atmospheric column over the CONUS.

# 

#### March Blizzard Sweeps the Northeast



16 March 2017 - A significant late-winter storm swept through the northeast U.S. this past week, dropping as much as 4 feet of on northern New York and New England, closing airports and businesses. This snowfall rate animation shows the passive microwave snowfall rate product. This product uses data from ATMS and AMSU-A/MHS pairs, located aboard: S- NPP, NOAA-18, NOAA-19, Metop-A, and Metop-B. Developed by a team of scientists at STAR and CICS-MD: H. Meng, R. Ferraro, J. Dong, C. Kongoli, and N.-Y. Wang along with B. Yan and L. Zhao from OSPO. The animation was made by Patrick Meyers of CICS-MD.



- We are meeting with service area providers to establish initiatives with clearly defined objectives and benefits with senior level management endorsement.
- Why endorsements?
  - We want to make sure that any investments we make are aligned with service areas strategic goals and will contribute to the service area